


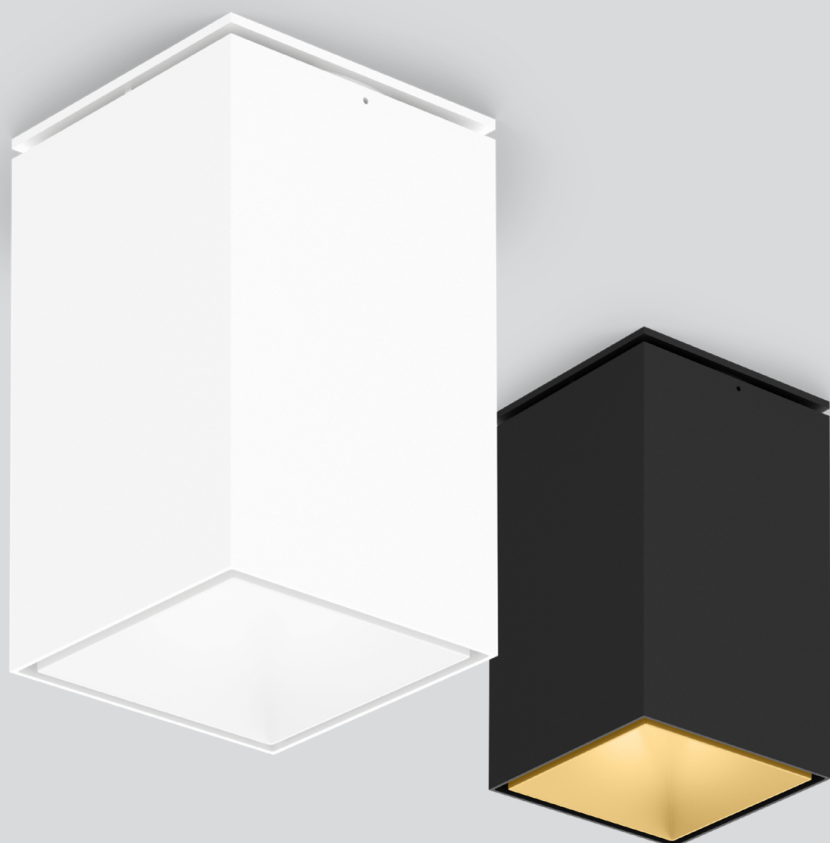

SASSO 100 square

ceiling

EN Square ceiling mounted spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; luminaire housing can be attached to mounting plate without tools by interlock; light inset tiltable; symmetric radiation characteristic - precise due to high quality lens system; with different beam angles; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; luminaire for through wiring; converter integrated into spotlight head

ES Foco cuadrado de aluminio para montaje en techo; superf. de inserto lumin. pintada; superf. carcasa con recubr. de polvo; cuerpo luminoso insertable en la placa de montaje por enclavamiento y sin necesidad de herramienta; elemento de luz inclinable; característica de emisión simétrica - precisa gracias al excelente sistema de lentes; con diferentes ángulos de emisión; Chip on Board que proporciona una máxima eficiencia; no sombras múltiples; LEDS de eficiencia que proporcionan una alta reproducción cromática; luminaria para cableado pasante; driver integrado en el proyector

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI $\geq$ 90 / 2 SDCM
UGR $\leq$ 13, UGR $\leq$ 16, UGR $\leq$ 19
hasta 101 lm/W
L80 / 50000 h
DALI-2, non attenuable
IP20

Types



Color



Color interno



Distribución luminosa



wallwasher and
wallwasher
floor inset



glare control
(UGR $\leq$ 16)





easy mounting
no visible
screws



Colour Warm
Dimming 1800
– 3000 K
(optional)



CRI $\geq$ 95 2
SDCM
(optional)



SASSO 100 square adjustable ceiling



SPOT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
17.9 W	2700 K	1450 lm	81 lm/W	0 4 8 - 3 3 1 0 9 S
	3000 K	1490 lm	83 lm/W	0 4 8 - 3 3 1 0 0 S
	3500 K	1530 lm	85 lm/W	0 4 8 - 3 3 1 0 2 S
	4000 K	1560 lm	87 lm/W	0 4 8 - 3 3 1 0 1 S

The data values for the luminous flux may differ for specific order options by -6%. Luminous flux value refers to inner colour traffic white.

MEDIUM CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
17.9 W	2700 K	1460 lm	82 lm/W	0 4 8 - 3 3 1 0 9 M
	3000 K	1500 lm	84 lm/W	0 4 8 - 3 3 1 0 0 M
	3500 K	1540 lm	86 lm/W	0 4 8 - 3 3 1 0 2 M
	4000 K	1570 lm	88 lm/W	0 4 8 - 3 3 1 0 1 M

The data values for the luminous flux may differ for specific order options by -7%. Luminous flux value refers to inner colour traffic white.

FLOOD CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
17.9 W	2700 K	1600 lm	89 lm/W	0 4 8 - 3 3 1 0 9 F
	3000 K	1660 lm	93 lm/W	0 4 8 - 3 3 1 0 0 F
	3500 K	1690 lm	94 lm/W	0 4 8 - 3 3 1 0 2 F
	4000 K	1730 lm	97 lm/W	0 4 8 - 3 3 1 0 1 F

WIDE FLOOD CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
17.9 W	2700 K	1670 lm	93 lm/W	0 4 8 - 3 3 1 0 9 W
	3000 K	1720 lm	96 lm/W	0 4 8 - 3 3 1 0 0 W
	3500 K	1760 lm	98 lm/W	0 4 8 - 3 3 1 0 2 W
	4000 K	1800 lm	101 lm/W	0 4 8 - 3 3 1 0 1 W

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white	7
				gold dust	9

Art Invest, Berlin

Alemania

Arquitecto

LEPEL & LEPEL


Architekt

Innenarchitektin PartG

mbB

Fotografía


Andrew Alberts

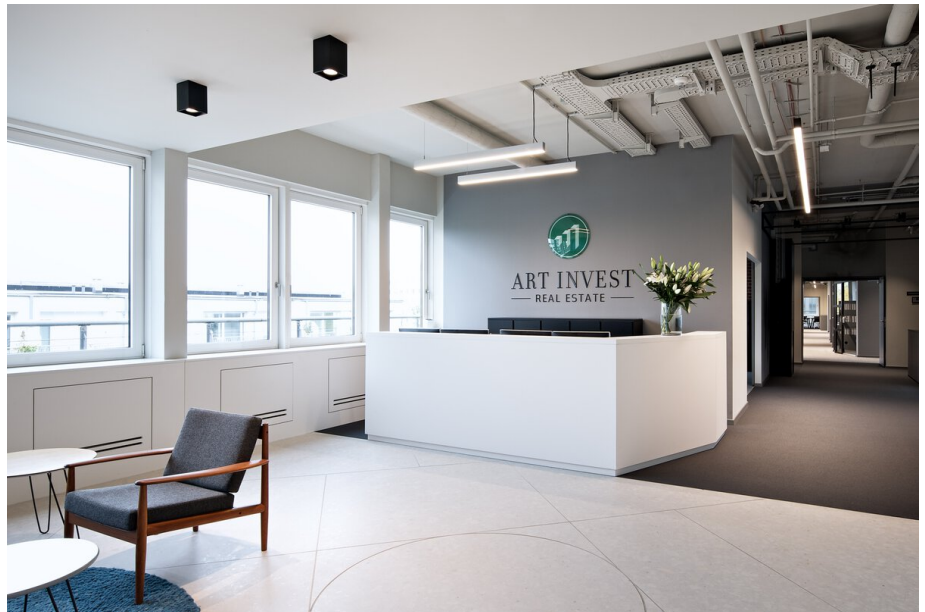


Productos utilizados




MUSE LIGHT
acoustic suspended



SASSO 100 square
ceiling




SASSO 100 round
adjustable recessed
1 lamp



SASSO 100 round
downlight recessed 1
lamp



SASSO 100 round
wallwasher recessed
1 lamp



SASSO 100 round
wallwasher/floor
recessed 1 lamp





