




SONIC ABSORBER DISC



Quickinfo

fieltro PET
PET felt (made of at least 50%
post-consumer recycled material)
SAC (sound absorption class) up
to D
fire resistance class: B-s1, d0, fire
resistance class: B-s2, d0

Types



Color






SONIC ABSORBER DISC

suspended

EN Acoustic element made of high quality, self-supporting, at least 50% recycled PET felt with sound absorbing properties; high quality visual and tactile surface; high acoustic performance by doubling the material; cable suspension, tool-less height adjustment

ES Elemento acústico de fieltro PET al menos un 50% reciclado y autoportante de calidad superior con propiedades de absorción del sonido; superficie de gran calidad óptica y táctil; alto rendimiento acústico por duplicación de material; suspensión cable altura regulable sin herramienta.

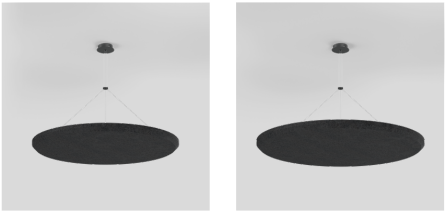

SONIC ABSORBER DISC suspended


A	B	C	D	E
$\alpha_w = 0.55$				
 PET felt				
0.8 NRC				
0.82 SAA				

COLOUR	ORDER CODE
anthracite	0 5 9 - 7 7 2 2 D 1 B
black	0 5 9 - 7 7 2 2 D 1 L
limestone	0 5 9 - 7 7 2 2 D 1 S
marble grey	0 5 9 - 7 7 2 2 D 1 D
white	0 5 9 - 7 7 2 2 D 1 W

Equivalent sound absorption area ($A_{eq} m^2$)

Ø (mm)	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
1280	0.07	0.67	1.8	2.93	3.03	2.9
1050	0.04	0.45	1.21	1.97	2.04	1.95

Sound absorption coefficients

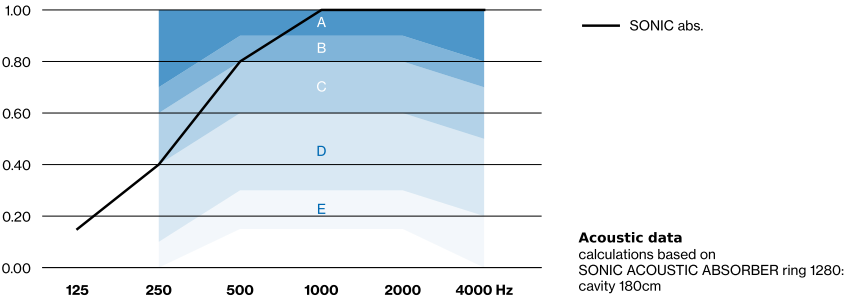

Order options

DIAMETER	D
1280 mm	1
1050 mm	2