




## Quickinfo

3000K  
CRI ≥ 90, 2 SDCM  
up to 118lm/W  
L80 @ 50 000h  
non DIM, DALI-2

## Types



connector



corner



curve

## Colours



standard




[xal.com/colours](http://xal.com/colours)

# MOVE IT 25 S system

trimless/surface/suspended

**EN** Thin extruded aluminium profile with 31mm height and 28mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional with indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking

**ES** Perfil de aluminio extrusionado plano con una altura de 31mm y con ancho de junta de 28mm; disponible para el encastre sin bordes en techos de cartón yeso (montaje en pared o techo) de 12,5mm de espesor; o para montaje sobre pared/techo o suspendido (suspensión por cable, ajuste de altura sin herramienta, cable de alimentación negro incluido); opcional con componentes de luz indirectos para el realce adicional del techo; para sistemas de iluminación; lineal, conector acodado de 90° o elemento CURVE de 90°; con perfil de rail electrificado integrado para la recepción de la tensión de alimentación y DALI; superficie anodizada o recubierto de polvo; montaje flexible y sin herramienta de los elementos insertables mediante un soporte magnético con bloqueo



custom cut on  
building site

Order options


CONTROL		
non DIM		1
DALI-2		3

MATERIAL COLOUR	
● jet black RAL 9005	

Options on request

CONNECTOR	
T-connector	
X-connector	

INSTALLATION TRACK	
acoustic soft ceilings	



MOVE IT 25 S trimless



INSTALLATION TRACK

L (mm)		ORDER CODE
617	channel	050-72120➦8
1217	channel	050-72140➦8
2417	channel	050-72180➦8
3622	channel	050-72190➦8
cust. cut	channel (non DIM)	E83131.....8
cust. cut	channel (DALI-2)	E83141.....8
672x645	channel corner* 90°	050-72110➦8
661x661	channel corner* ceiling to wall 90°	050-72111➦8

\*incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-7210008

BLIND COVER

L (mm)	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000.....8B

blind cover can be shortened as desired

CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321➦0
mechanical linear connector (pair)	050-2011110


POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5mm <sup>2</sup>	050-2020110
DALI-2 2×2,5 + 2×0,5mm <sup>2</sup>	050-2020130

cable length 500 mm

Electrical accessories

see following pages



## Order options

## CONTROL

non DIM	1
DALI-2	3

## MATERIAL COLOUR

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

\*inside always in black

## MATERIAL COLOUR

## ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

## MATERIAL COLOUR





## CABLE SUSPENSION

chrome	0
black	8

## Options on request

## CONNECTOR

T-connector	
X-connector	



## MOVE IT 25 S surface / suspended



## INSTALLATION TRACK / BLIND COVER

## L (mm)

620	channel
1220	channel
2420	channel
3625	channel
cust. cut	channel (non DIM)
cust. cut	channel (DALI-2)
637x610	channel corner* 90°
666x666	channel corner* ceiling to wall 90°

\*incl. electrical connector set

1217	blind cover
2417	blind cover
3622	blind cover
cust. cut	blind cover

## ORDER CODE

050-73120	
050-73140	
050-73180	
050-73190	
E83151	
E83161	
050-73110	
050-73111	

050-7004008	
050-7008008	
050-7009008	
E83000	

## CURVE CONNECTOR

## TYPE

mechanical & electrical R 300 mm	
mechanical R 300 mm	

## ORDER CODE

050-731303	
050-731311	

## Accessories

## END CAPS

## TYPE

end caps (pair)	
-----------------	--

## ORDER CODE

050-731000	
------------	--

## CONNECTOR SET

## TYPE

mechanical linear conn. incl. 1500 mm cable susp.	
mechanical linear connector surface	
mechanical & electrical linear connector	

## ORDER CODE

050-201131	
050-2011410	
050-2031230	

## POWER FEEDER UNIT

## TYPE

TYPE	L (mm)	ORDER CODE
non DIM 2×2,5mm <sup>2</sup>	2000	050-2022110
DALI-2 2×2,5 + 2×0,5mm <sup>2</sup>	2000	050-2022130
non DIM 2×2,5mm <sup>2</sup>	4000	050-2024110
DALI-2 2×2,5 + 2×0,5mm <sup>2</sup>	4000	050-2024130

## CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

## TYPE

TYPE	L (mm)	ORDER CODE
ceiling fastener	67	050-204111
cable suspension*	1500	005-215211
canopy		005-231171
wall mounting accessory		050-2044118

\*use every 1200 mm

## Electrical accessories

see following pages

## Order options

## COLOUR TEMPERATURE

3000 K

## CONTROL

non DIM	1
DALI-2	3

## MATERIAL COLOUR

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

\*inside always in black

## MATERIAL COLOUR

## ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

## MATERIAL COLOUR

## CABLE SUSPENSION

chrome	0
black	8

## Options on request

## COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM





## COLOUR TEMPERATURE

2700 K	
4000 K	
tunable white 2700–6500 K*	

\*DALI-2 DT8

## CONNECTOR

T-connector	
X-connector	



## MOVE IT 25 S suspended indirect



## INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-74125
1220	15.3 W	1810 lm	050-74145
2420	33 W	3890 lm	050-74185
3625	51 W	6000 lm	050-74195
637x610 corner*	13.1 W	1550 lm	050-74110

incl. chrome cable suspension for L=1220/2420/3625 mm

no custom cut on building side; \*incl. electrical connector set

1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000...8B

## Accessories

## END CAPS

TYPE	ORDER CODE
end caps (pair)	050-731000

## CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-2031230

## POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm <sup>2</sup>	2000	050-2022110
DALI-2 2 × 2,5 + 2 × 0,5 mm <sup>2</sup>	2000	050-2022130
non DIM 2 × 2,5 mm <sup>2</sup>	4000	050-2024110
DALI-2 2 × 2,5 + 2 × 0,5 mm <sup>2</sup>	4000	050-2024130

## CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

\*use every 1200 mm

## Electrical accessories

see following pages



## MOVE IT 25 system

trimless/surface/suspended


**EN** Extruded aluminium profile with 28 mm width groove; for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; node connectors, up to 6 profile connection options; with power track profile for take off of supply voltage and DALI signal; surf. anod. or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking; sound absorbing accessories available

**ES** Perfil de aluminio extruido con ancho de junta de 28 mm; para encastre sin bordes en planchas cartón yeso (montaje pared o techo) de 12,5 mm espesor; o para montaje sobre pared/techo o suspendido (suspensión por cable, ajuste de altura sin herramienta, cable de alimentación negro incluido); opcional componentes de luz indirectos para el realce adicional del techo; para sistemas de iluminación; lineal, conector acodado de 90° o elemento CURVE de 90°; conector de nodos, conexión de hasta 6 perfiles; con perfil de rail electrificado para la recepción de la tensión de alimentación y DALI; superf. anodiz. o recub. de polvo; montaje flexible y sin herramienta de los elementos insertables mediante un soporte magnético con bloqueo; disponible accesorio para la absorción del ruido


### Quickinfo

3000K  
CRI ≥ 90, 2 SDCM  
up to 118 lm/W  
L80 @ 50 000 h  
non DIM, DALI-2

### Types



### connectors



node



corner



curve


### Colours




standard



[xal.com/colours](http://xal.com/colours)



custom cut on  
building site



acoustic  
elements

## Order options

### CONTROL

non DIM	1
DALI-2	3

### MATERIAL COLOUR

● jet black RAL 9005






## Options on request

### CONNECTOR

T-connector	
X-connector	

### INSTALLATION TRACK

acoustic soft ceilings



## MOVE IT 25 trimless



### INSTALLATION TRACK

#### L (mm)

		ORDER CODE
617	channel	050-72020-8
1217	channel	050-72040-8
2417	channel	050-72080-8
3622	channel	050-72090-8
cust. cut	channel (non DIM)	E83031-8
cust. cut	channel (DALI-2)	E83041-8
672x645	channel corner* 90°	050-72010-8
661x661	channel corner* ceiling to wall 90°	050-72011-8

\*incl. electrical connector set

## Accessories

### END CAPS

TYPE	ORDER CODE
end caps (pair)	050-7200008

### BLIND COVER

L (mm)	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000-8B

blind cover can be shortened as desired

### CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321-0
mechanical linear connector (pair)	050-2011110

### POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5mm <sup>2</sup>	050-2020110
DALI-2 2×2,5 + 2×0,5mm <sup>2</sup>	050-2020130

cable length 500 mm

## Electrical accessories

see following pages

## Order options

## CONTROL

non DIM	1
DALI-2	3

## MATERIAL COLOUR

## INSTALLATION TRACK

● jet black RAL 9005	8
○ traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

\*inside always in black

## MATERIAL COLOUR

## NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

## MATERIAL COLOUR

## NODE LTX / END CAP

● jet black RAL 9005	8
○ traffic white 9016 / jet black 9005 P	
● special colours	X

## MATERIAL COLOUR

## ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

## MATERIAL COLOUR

## CABLE SUSPENSION







chrome	0
black	8

## NODE CONNECTOR

## MOUNTING TYPE

surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

\*only for L/T/X



## MOVE IT 25 surface/suspended



## INSTALLATION TRACK / BLIND COVER

L (mm)		ORDER CODE
620	channel	050-73020
1220	channel	050-73040
2420	channel	050-73080
3625	channel	050-73090
cust. cut	channel (non DIM)	E83051
cust. cut	channel (DALI-2)	E83061
637x610	channel corner* 90°	050-73010
666x666	channel corner* ceiling to wall 90°	050-73011
*incl. electrical connector set		
1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 ···· 8B

## CURVE CONNECTOR

TYPE	ORDER CODE
mechanical & electrical R 300 mm	050-730303
mechanical R 300 mm	050-730311

## Accessories

## END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000

## NODE CONNECTOR

TYPE	ORDER CODE
NODE surface mounted	050-203333
NODE surface mounted incl. feeder	050-202243
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-730010

\*order for every node connection (channel to node) 1 end cap

## CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical linear connector surface	050-2011410
mechanical & electrical linear connector	050-2031230

## POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2×2,5 mm <sup>2</sup>	2000	050-2022110
DALI-2 2×2,5 + 2×0,5 mm <sup>2</sup>	2000	050-2022130
non DIM 2×2,5 mm <sup>2</sup>	4000	050-2024110
DALI-2 2×2,5 + 2×0,5 mm <sup>2</sup>	4000	050-2024130

## CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

TYPE	L (mm)	ORDER CODE
ceiling fastener	67	050-204111
cable suspension*	1500	005-215211
canopy		005-231171
wall mounting accessory		050-2044118

\*use every 1200 mm

## Electrical accessories

see following pages

## Acoustic elements

see following pages

## Order options

## COLOUR TEMPERATURE

3000 K

## CONTROL

non DIM	1
DALI-2	3

## MATERIAL COLOUR

## INSTALLATION TRACK

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

\*inside always in black

## MATERIAL COLOUR

## NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

## MATERIAL COLOUR

## NODE LTX/END CAP

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● special colours	X

## MATERIAL COLOUR

## ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

## MATERIAL COLOUR

## CABLE SUSPENSION

chrome	0
black	8

## NODE CONNECTOR

## MOUNTING TYPE

surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

\*only for L/T/X

## Options on request






## COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

## COLOUR TEMPERATURE

2700 K
4000 K
tunable white 2700–6500 K*
*DALI-2 DT8

**LUMINOUS FLUX** value calculated for  
3000 K, CRI ≥ 90, colour white/black



## MOVE IT 25 suspended indirect



## INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-74025
1220	15.3 W	1810 lm	050-74045
2420	33 W	3890 lm	050-74085
3625	51 W	6000 lm	050-74095
637x610 corner*	13.1 W	1550 lm	050-74010

incl. chrome cable suspension for L=1220/2420/3625 mm

no custom cut on building side; \*incl. electrical connector set

1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000...8B

## Accessories

## END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000

## NODE CONNECTOR

TYPE	ORDER CODE
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-730010

\*order for every node connection (channel to node) 1 end cap

## CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-2031230

## POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm <sup>2</sup>	2000	050-2022110
DALI-2 2 × 2,5 + 2 × 0,5 mm <sup>2</sup>	2000	050-2022130
non DIM 2 × 2,5 mm <sup>2</sup>	4000	050-2024110
DALI-2 2 × 2,5 + 2 × 0,5 mm <sup>2</sup>	4000	050-2024130

## CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

\*use every 1200 mm

## Electrical accessories

see following pages

## Acoustic elements

see following pages







## Order options

## CONTROL

non DIM	1
DALI-2	3

## MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



## Electrical accessories

## POWER SUPPLY INTRACK supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
100 W □ PC II $\eta$ 92 %		intrack	403-26-46	050-2071038
150 W □ PC II $\eta$ 92 %		intrack	403-26-46	050-2071138

incl. feeder cable 2000 mm; ENEC approved; DALI-2 SELV device integrated

## POWER SUPPLY SURFACE supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II $\eta$ 88 %		surface	305-144-54	050-20551
100 W □ PC II $\eta$ 92 %		surface	455-104-40	050-20554
150 W □ PC II $\eta$ 92 %		surface	455-104-40	050-20552
250 W □ PC II $\eta$ 93 %		surface	455-104-40	050-20555
320 W ⊕ PC I $\eta$ 94 %		surface	305-144-54	050-20553

ENEC approved; DALI-2 SELV device integrated

## POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II $\eta$ 88 %		external	163-43-32	002-62133
100 W □ PC II $\eta$ 92 %		external	350-30-18	002-62134
150 W □ PC II $\eta$ 92 %		external	350-30-18	002-62135
250 W □ PC II $\eta$ 93 %		external	400-40-22	002-62139
320 W ⊕ PC I $\eta$ 94 %		external	252-90-44	002-60320

ENEC approved

## POWER SUPPLY BASIC 48 V

220-240 V | 50-60 Hz | □ PC II | Lifetime @ 120 W, 45° ambient temp. cascable max. 3 devices

TYPE	EFFICIENCY / LIFETIME	W-H-D (mm)	ORDER CODE
160 W $\eta$ 94.5 % / > 100.000 h		72-90-63	005-6520210

## DIN RAIL POWER SUPPLY PRO 48 V

220-240 V | 50-60 Hz | ⊕ PC I | MTBF @ 55° ambient temperature cascable max. 5 devices (240 W) or 3 devices (480 W)

TYPE	EFFICIENCY / MTBF	W-H-D (mm)	ORDER CODE
240 W $\eta$ 92 % / > 400.000 h		60-125-100	005-6220110
480 W $\eta$ 93 % / > 350.000 h		120-125-100	005-6220210

## DALI-2 SELV DEVICE

TYPE	L-W-H (mm)	ORDER CODE
control unit	213-37-26	050-2061130

necessary to create DALI-2 SELV signal; DALI power supply integrated

## DALI SENSOR

TYPE	L-W-H (mm)	ORDER CODE
ESSENTIAL sensor (brightness & presence)	125-28-45	050-2063178

## WIRELESS TO DALI-2 CONTROL DEVICE

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2065230

DALI-2 SELV device required

## WIRELESS TO DALI-2 REPEATER

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2066230

## MIDDLE FEED

TYPE	ORDER CODE
DALI-2 2×2,5 + 2×0,5 mm <sup>2</sup>	050-2038130

cable length 2000 mm

**Blique by Nobis**  
Stockholm, SE –  
by Wingårdh





# JUST

spotlight inset 25/25S

## Quickinfo


2700K, 3000K, 4000K, TW, CWD  
CRI ≥ 90, 2 SDCM  
non DIM, DALI-2

L95 @ 50 000h  
JUST 32 focus up to 78lm/W

L80 @ 50 000h  
JUST 45 up to 92lm/W

L90 @ 50 000h  
JUST 55 up to 109lm/W

## Types



## Colours




## Light distributions


JUST 32 focus



JUST 45



JUST 55



## Order options

### COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1
colour warm dim. 2000–3000 K*	
tunable white 1800–3000 K**	
tunable white 2700–6500 K**	

\*DALI-2 \*\*DALI-2 DT8

### CONTROL

non DIM	1
DALI-2	3

### MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

### BEAM ANGLE JUST 45

medium 23°	M
flood 44°	F




### BEAM ANGLE JUST 55

spot 16°	S
medium 23°	M
flood 37°	F

## Options on request

### OPTICAL ACCESSORIES

elliptical sculpture foil  
snoot  
colour filter (red, blue, green, etc.)  
only for JUST 32 focus



## JUST 32 focus 17–43°



### SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
5.5 W	411 lm	050-0111

## JUST 45



### SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
6.0 W super spot 8°	285 lm	050-0131
10.9 W	960 lm	050-0131
10.7 W CWD 2000–3000 K	560 lm	050-0131E3
11 W TW 1800–3000 K	555 lm	050-0131L3
11 W TW 2700–6500 K	683 lm	050-0131D3

## JUST 55



### SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
12.7 W	1330 lm	050-0143
19.1 W	1820 lm	050-0142

## Optical accessories

### HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
JUST 32 focus	30·4	007-1965178
JUST 45	42·3	007-1965188
JUST 55	50·3	007-1965598

### OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965880
JUST 55	50·3	007-1965890

### SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965980
JUST 55	50·3	007-1965990

### WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965780
JUST 55	50·3	007-1965790

**INSET POWER** in watts is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for 3000 K, CRI ≥ 90, colour white, lens flood 2700 K -5%, 4000 K +5%





reddot award 2019  
winner



DESIGN  
AWARD  
2019


# PIVOT

graphic light inset 25/25S/45

## Quickinfo

2700 K, 3000 K, TW  
CRI  $\geq$  90, 3 SDCM  
up to 123 lm/W  
L90 @ 50 000 h  
non DIM, DALI-2

## Types




## Colour




## Light distribution



opal



tunable white  
1800–4000 K



CRI  $\geq$  98  
XPECTRUM

## Order options

## COLOUR TEMPERATURE

2700 K	4
3000 K	5
tunable white 1800–4000 K*	L

\*DALI-2 DT8

## CONTROL

non DIM	1
DALI-2	3

## MATERIAL COLOUR

● jet black RAL 9005

## Options on request

## COLOUR RENDERING INDEX


CRI ≥ 98 XPECTRUM

## COLOUR TEMPERATURE


4000 K

## MATERIAL COLOUR

○ traffic white RAL 9016





## LIGHT INSET 25S




## PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 1 3 1 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 1 3 1 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 1 3 1 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 1 3 1 5 :: 8 O
	3000 K	3160 lm		
32 W	2700 K	3570 lm	1810	0 5 0 - 1 3 1 6 :: 8 O
	3000 K	3790 lm		

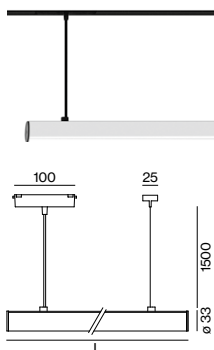


## PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 2 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 2 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 2 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 2 5 :: 8 O
	3000 K	3160 lm		





## LIGHT INSET 25/45



## PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 1 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 1 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 1 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 1 5 :: 8 O
	3000 K	3160 lm		
32 W	2700 K	3570 lm	1810	0 5 0 - 0 3 1 6 :: 8 O
	3000 K	3790 lm		

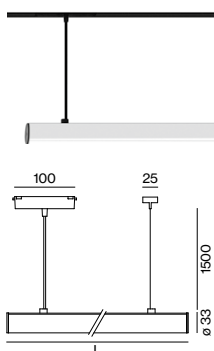

## PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 2 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 2 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 2 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 2 5 :: 8 O
	3000 K	3160 lm		

LUMINOUS FLUX value calculated for  
CRI ≥ 90, colour black



## FLEXTRACK

system extension 25/25S


**EN** Thin extruded aluminium profile with 31mm height and 28mm width groove; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; for installation in two MOVE IT 25 or 25 S profiles; profile can be installed and moved without tools by means of magnetic holders+locking; mount 360° rotatable and freely slidable on one end; light insets can be installed flexibly and without tools by means of magnetic holders+locking

**ES** Perfil de aluminio extruido plano de 31mm de alto y 28 mm de ancho de junta; con perfil de carril electrificado integrado para toma de suministro electr. y señal DALI; superficie anodiz. o recub. de pintura en polvo; para inserción en dos perfiles MOVE IT 25 o MOVE IT 25 S; perfil insertable y desplazable sin herramienta mediante soporte magnético con bloqueo; soporte girable a 360° y libremente desplazable en un extremo; montaje flexible y sin herramienta de los elementos de luz mediante soporte magnético con bloqueo

### Quickinfo

non DIM, DALI-2

### Types



### Colours





Order options

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	G
● special colours*	X
*inside always in black	



MOVE IT 25 S



FLEXTRACK

L (mm)	ORDER CODE
620	050-75120
920	050-75130
1220	050-75140
1520	050-75150
1820	050-75160


MOVE IT 25



FLEXTRACK

L (mm)	ORDER CODE
620	050-75020
920	050-75030
1220	050-75040
1520	050-75050
1820	050-75060




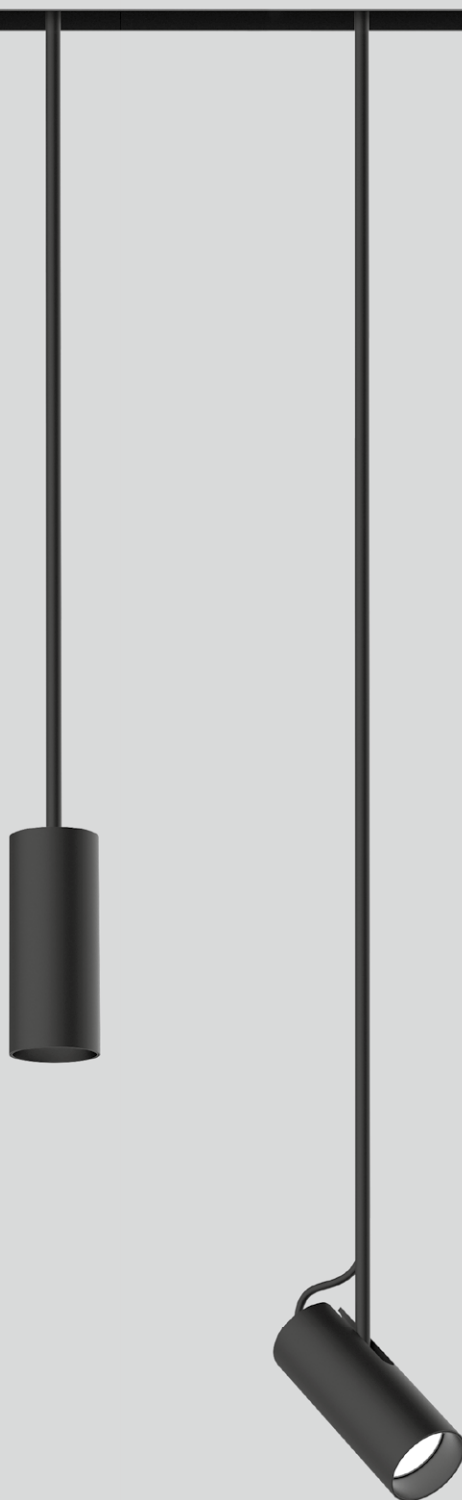

## Quickinfo

2700 K, 3000 K, 4000 K, TW  
CRI ≥ 90, 3 SDCM  
up to 84 lm/W  
L90 @ 50 000 h  
non DIM, DALI-2

## Types



## Colours



## Light distributions




reddot winner 2020




DESIGN  
AWARD  
2020

## ARY rod

decorative inset 25/25S/45



free positioning by  
ring and hook



tunable white  
2200 – 4000 K

## Order options

### CABLE SUSPENSION

1500mm	5
2000mm with hook*	6

\*one ring included

### COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200–4000 K*	

\*DALI-2 DT8

### CONTROL

non DIM	1
DALI-2	3

### MATERIAL COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

### ACCESSORY COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

### BEAM ANGLE

medium 25°	M
flood 44°	F



## ARY rod



### DOWNLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 2 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	050-0 2 1 D 3

## ARY rod adjustable



### SPOTLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 3 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	050-0 3 1 D 3



## Mounting accessories

### RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	050-151011
MOVE IT 25/45	50-91	050-051011



### RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	050-051021



## Optical accessories

### HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	42-3	007-1965188
oval lens	42-3	007-1965880
soft lens	42-3	007-1965980
wallwasher lens	42-3	007-1965780



reddot winner 2020



DESIGN  
AWARD  
2020


## ARY cable

decorative inset 25/25S/45

### Quickinfo

2700 K, 3000 K, 4000 K, TW  
CRI ≥ 90, 3 SDCM  
up to 84 lm/W  
L90 @ 50 000 h  
non DIM, DALI-2


### Types




### Colours



### Light distributions



free positioning by  
ring and hook



tunable white  
2200 – 4000 K

## Order options

## CABLE SUSPENSION

1500mm	5
2000mm with hook*	6

\*one ring included

## COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200–4000 K*	

\*DALI-2 DT8

## CONTROL

non DIM	1
DALI-2	3

## MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

## ACCESSORY COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8

## BEAM ANGLE


medium 25°	M
flood 44°	F

## SHADE COLOUR

● velvet beige RAL 085 80 10	C
● madeira brown RAL 050 40 40	T
● kingfisher grey RAL 230 60 10	L
● woodpecker olive RAL 10 50 20	G
○ signal white RAL 9003	W
● signal black RAL 9004	B



## ARY cable



## DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	0 5 0 - 0 5 1 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	0 5 0 - 0 5 1 1 D 3

## Mounting accessories

## RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1

## RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1

## Optical accessories

## SHADE


TYPE	Ø-H (mm)	ORDER CODE
cone 300	300-188	0 4 9 - 5 9 3 3 1 1
cone 400	400-253	0 4 9 - 5 9 3 4 1 1
cone 500	500-318	0 4 9 - 5 9 3 5 1 1

only available for ARY cable

## HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	42-3	0 0 7 - 1 9 6 5 1 8 8
oval lens	42-3	0 0 7 - 1 9 6 5 8 8 0
soft lens	42-3	0 0 7 - 1 9 6 5 9 8 0
wallwasher lens	42-3	0 0 7 - 1 9 6 5 7 8 0

LUMINOUS FLUX value calculated for  
CRI ≥ 90, colour white, lens flood

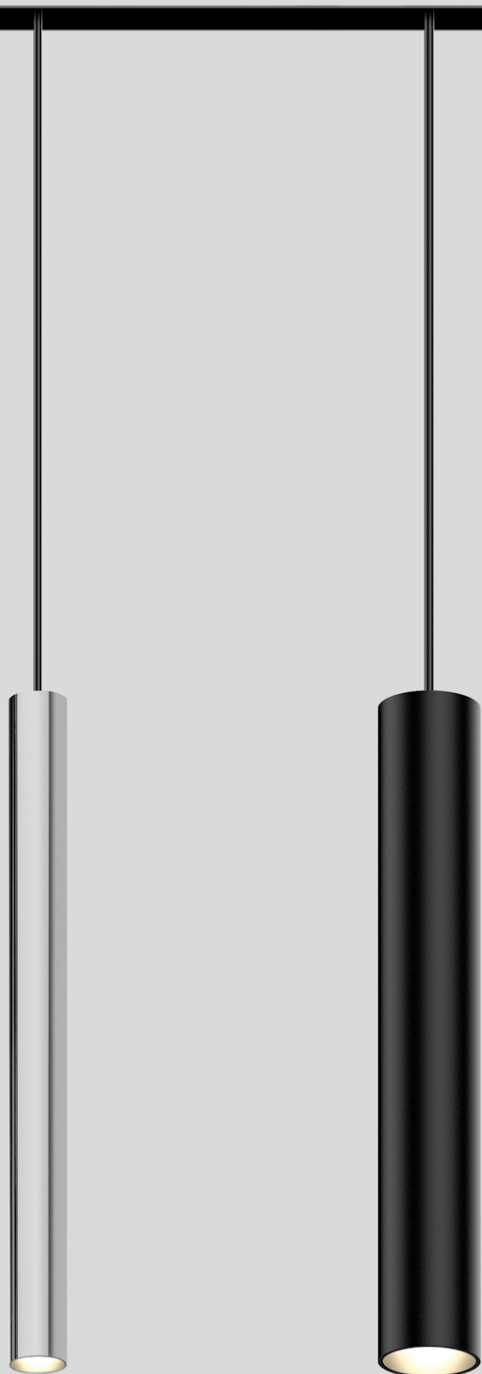


# TULA

decorative inset 25/25S/45

## Quickinfo

2700 K, 3000 K, TW  
CRI ≥ 90, 3 SDCM  
up to 75 lm/W  
L80 @ 50 000 h  
non DIM, DALI-2


## Types




## Colours



## Light distributions



free positioning by  
ring and hook



tunable white  
2200 – 4000 K

Order options

HOUSING HEIGHT	L
300 mm	0
500 mm	1

CABLE SUSPENSION	⌘
1500 mm	7
2000 mm with hook*	8

\*one ring included

COLOUR TEMPERATURE	⬢
2700 K	4
3000 K	5
tunable white 2200 – 4000 K*	

\*DALI-2 DT8

CONTROL	⬢
non DIM	1
DALI-2	3


MATERIAL COLOUR	☑
○ chrome	4
○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR	■
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE	▲
medium 24°/25°	M
flood 30°/44°	F

Options on request

COLOUR TEMPERATURE	
4000 K	




TULA nano suspended



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11W	2700 K	642lm	0 5 0 - L ⌘ 1 1 ⬢ ⬢ ▲
	3000 K	688lm	




TULA micro suspended



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	998lm	0 5 0 - L ⌘ 1 5 ⬢ ⬢ ▲
	3000 K	1048lm	
5.4 W	2200 – 4000 K	254lm	0 5 0 - L ⌘ 1 5 D 3 ⬢ ▲

Mounting accessories



RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1 ■




RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1 ■

Optical accessories

HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
TULA micro   honeycomb louver	42-3	0 0 7 - 1 9 6 5 1 8 8
TULA micro   oval lens	42-3	0 0 7 - 1 9 6 5 8 8 0
TULA micro   soft lens	42-3	0 0 7 - 1 9 6 5 9 8 0
TULA micro   wallwasher lens	42-3	0 0 7 - 1 9 6 5 7 8 0

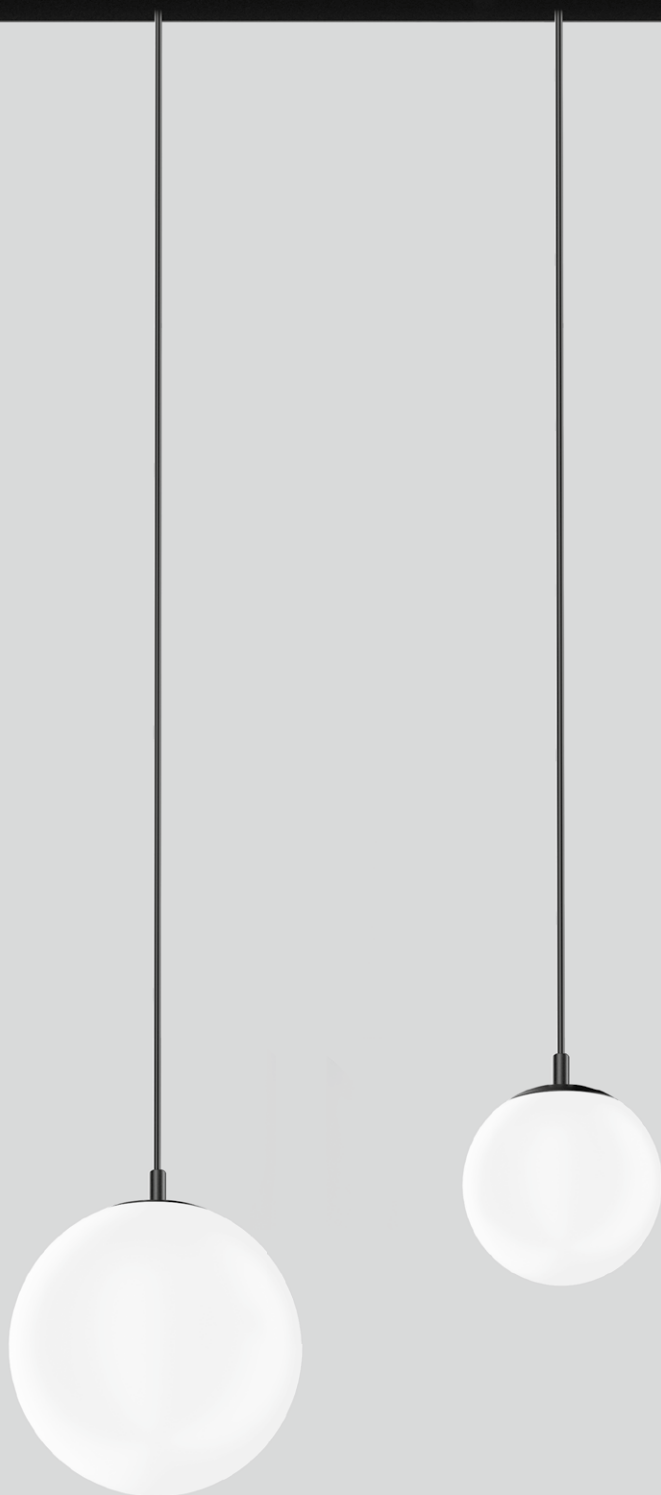


# PAL

decorative inset 25/25S/45

## Quickinfo

2700 K, 3000 K  
CRI ≥ 90, 3 SDCM  
up to 55 lm/W  
L80 @ 50 000 h  
non DIM, DALI-2

## Types



## Colours



## Light distribution



Order options


CABLE SUSPENSION	5
1500mm	5
2000mm with hook*	6
*one ring included	

COLOUR TEMPERATURE	4
2700 K	4
3000 K	5


CONTROL	1
non DIM	1
DALI-2	3

MATERIAL COLOUR	7
○ pure white RAL 9010	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR	7
○ pure white RAL 9010	7
● jet black RAL 9005	8



PAL suspended



DOWNLIGHT

INS. POWER	COLOUR TEMP.	LUM. FLUX	Ø (mm)	ORDER CODE
9.1W	2700 K	472lm	80	0 5 0 - 1 5 1 1 1
	3000 K	498lm		
9.1W	2700 K	472lm	120	0 5 0 - 1 5 1 3 1
	3000 K	498lm		


Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1

RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1




**INSET POWER** in watts is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI≥90, colour white, glass



**Quickinfo**

2700 K  
CRI ≥ 95, 3 SDCM  
up to 72 lm/W  
L90 @ 50 000 h  
non DIM, DALI-2

**Types****Colours**

## wästberg w201 Extra small pendant

Design by Claesson Koivisto Rune

Order options

CABLE SUSPENSION

3000 mm	5
3000 mm with hook	6

COLOUR TEMPERATURE

2700 K	
--------	--

CONTROL


non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

ACCESSORY COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8




w201 Extra small pendant s1



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	544lm	050-04814




w201 Extra small pendant s2



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	572lm	050-04824




w201 Extra small pendant s3



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	572lm	050-04834

Mounting accessories



RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	050-151011
MOVE IT 25/45	50-91	050-051011



RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	050-051021

**INSET POWER** in watts is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI≥90, colour white

# SPOT LINE / OPAL

linear inset 25


## Quickinfo

2700 K, 3000 K, TW (opal)  
 CRI  $\geq 90$ , 3 SDCM  
 SPOT LINE up to 82lm/W  
 OPAL up to 101lm/W  
 L80 @ 50 000 h  
 non DIM, DALI-2


## Types

MOVE IT 25



SPOT LINE




OPAL



## Light distributions



tunable white  
1800–4000 K



CRI  $\geq 98$   
XPECTRUM

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
tunable white 1800–4000 K*	L
*only available for opal high performance inset   DALI-2 DT8	


CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR
● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX
CRI ≥ 98 XPECTRUM


COLOUR TEMPERATURE
4000 K




LIGHT INSET 25



SPOT LINE				ORDER CODE
INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	
4.5 W	2700 K	336lm	155	0 5 0 - 0 2 2 0 :: 8 M
	3000 K	363lm		
8.9 W	2700 K	673lm	305	0 5 0 - 0 2 2 1 :: 8 M
	3000 K	726lm		
17.9 W	2700 K	1350lm	605	0 5 0 - 0 2 2 2 :: 8 M
	3000 K	1450lm		



OPAL HIGH PERFORMANCE				ORDER CODE
INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	
5.3 W	2700 K	451lm	305	0 5 0 - 0 2 1 1 :: 8 H
	3000 K	484lm		
10.6 W	2700 K	902lm	605	0 5 0 - 0 2 1 2 :: 8 H
	3000 K	968lm		
21.3 W	2700 K	1800lm	1205	0 5 0 - 0 2 1 4 :: 8 H
	3000 K	1940lm		
43 W	2700 K	3610lm	2405	0 5 0 - 0 2 1 8 :: 8 H
	3000 K	3870lm		




LIGHT INSET 25 S



OPAL HIGH PERFORMANCE				ORDER CODE
INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	
5.3 W	2700 K	402lm	305	0 5 0 - 1 2 1 1 :: 8 H
	3000 K	432lm		
10.6 W	2700 K	805lm	605	0 5 0 - 1 2 1 2 :: 8 H
	3000 K	864lm		
21.3 W	2700 K	1610lm	1205	0 5 0 - 1 2 1 4 :: 8 H
	3000 K	1730lm		
43 W	2700 K	3220lm	2405	0 5 0 - 1 2 1 8 :: 8 H
	3000 K	3460lm		

canyon solution for MOVE IT 25

Light distribution



spot line

**INSET POWER** in watts is the current consumption excluding any ballast

**LUMINOUS FLUX** value calculated for CRI ≥ 90, colour black

# WALLWASHER

linear inset 25/25S


## Quickinfo

2700 K, 3000 K  
CRI  $\geq 90$ , 3 SDCM  
WALLWASHER up to 81lm/W  
WW flush up to 82lm/W  
L80 @ 50 000 h  
non DIM, DALI-2


## Types

### MOVE IT 25

#### WALLWASHER




#### WALLWASHER flush



### MOVE IT 25 S


#### WALLWASHER flush



## Light distribution



wall  
washer



CRI  $\geq 98$   
XPECTRUM

Order options


COLOUR TEMPERATURE		••
2700 K	4	
3000 K	5	
CONTROL		◆
non DIM	1	
DALI-2	3	

MATERIAL COLOUR	
● jet black RAL 9005	

Options on request

COLOUR RENDERING INDEX	
CRI ≥ 98 XPECTRUM	

COLOUR TEMPERATURE	
4000 K	




LIGHT INSET 25



WALLWASHER

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
13 W	2700 K	983 lm	450	0 5 0 - 0 2 3 2 •• 3 8 A
	3000 K	1050 lm		



WALLWASHER FLUSH


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	0 5 0 - 0 2 1 1 •• ◆ 8 A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	0 5 0 - 0 2 1 2 •• ◆ 8 A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	0 5 0 - 0 2 1 4 •• ◆ 8 A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	0 5 0 - 0 2 1 8 •• ◆ 8 A
	3000 K	3630 lm		

Optical accessories

ANTI-GLARE GRID

TYPE	L-W (mm)	ORDER CODE
WALLWASHER FLUSH	303-25	0 5 0 - 0 2 3 0 9 1 8

cluster solution to create anti-glare grid for all lengths




LIGHT INSET 25 S




WALLWASHER FLUSH

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	0 5 0 - 1 2 1 1 •• ◆ 8 A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	0 5 0 - 1 2 1 2 •• ◆ 8 A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	0 5 0 - 1 2 1 4 •• ◆ 8 A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	0 5 0 - 1 2 1 8 •• ◆ 8 A
	3000 K	3630 lm		

Light distributions



wallwasher



wallwasher flush

**INSET POWER** in watts is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI ≥ 90, colour black


## Quickinfo

2700 K, 3000 K  
CRI  $\geq 90$ , 3 SDCM  
WALL GRAZER up to 107 lm/W  
BATWING up to 104 lm/W  
L80 @ 50 000 h  
non DIM, DALI-2

## Types

MOVE IT 25 S

WALL GRAZER / BATWING




## Light distributions



# WALL GRAZER/BATWING

linear inset 25S




CRi  $\geq 98$   
XPECTRUM

Order options

COLOUR TEMPERATURE		••
2700 K	4	
3000 K	5	
CONTROL		◆
non DIM	1	
DALI-2	3	
MATERIAL COLOUR		
● jet black RAL 9005		

Options on request

COLOUR RENDERING INDEX	
CRI ≥ 98 XPECTRUM	
COLOUR TEMPERATURE	
4000 K	




LIGHT INSET 25 S



WALL GRAZER


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	525 lm	305	0 5 0 - 1 2 1 1 : 8 S
	3000 K	564 lm		
10.6 W	2700 K	1050 lm	605	0 5 0 - 1 2 1 2 : 8 S
	3000 K	1130 lm		
21.3 W	2700 K	2100 lm	1205	0 5 0 - 1 2 1 4 : 8 S
	3000 K	2260 lm		
43 W	2700 K	4200 lm	2405	0 5 0 - 1 2 1 8 : 8 S
	3000 K	4510 lm		




BATWING

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	512 lm	305	0 5 0 - 1 2 1 1 : 8 B
	3000 K	550 lm		
10.6 W	2700 K	1020 lm	605	0 5 0 - 1 2 1 2 : 8 B
	3000 K	1100 lm		
21.3 W	2700 K	2050 lm	1205	0 5 0 - 1 2 1 4 : 8 B
	3000 K	2200 lm		
43 W	2700 K	4100 lm	2405	0 5 0 - 1 2 1 8 : 8 B
	3000 K	4400 lm		

Light distributions




wall grazer



batwing

**INSET POWER** in watts is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI ≥ 90, colour black



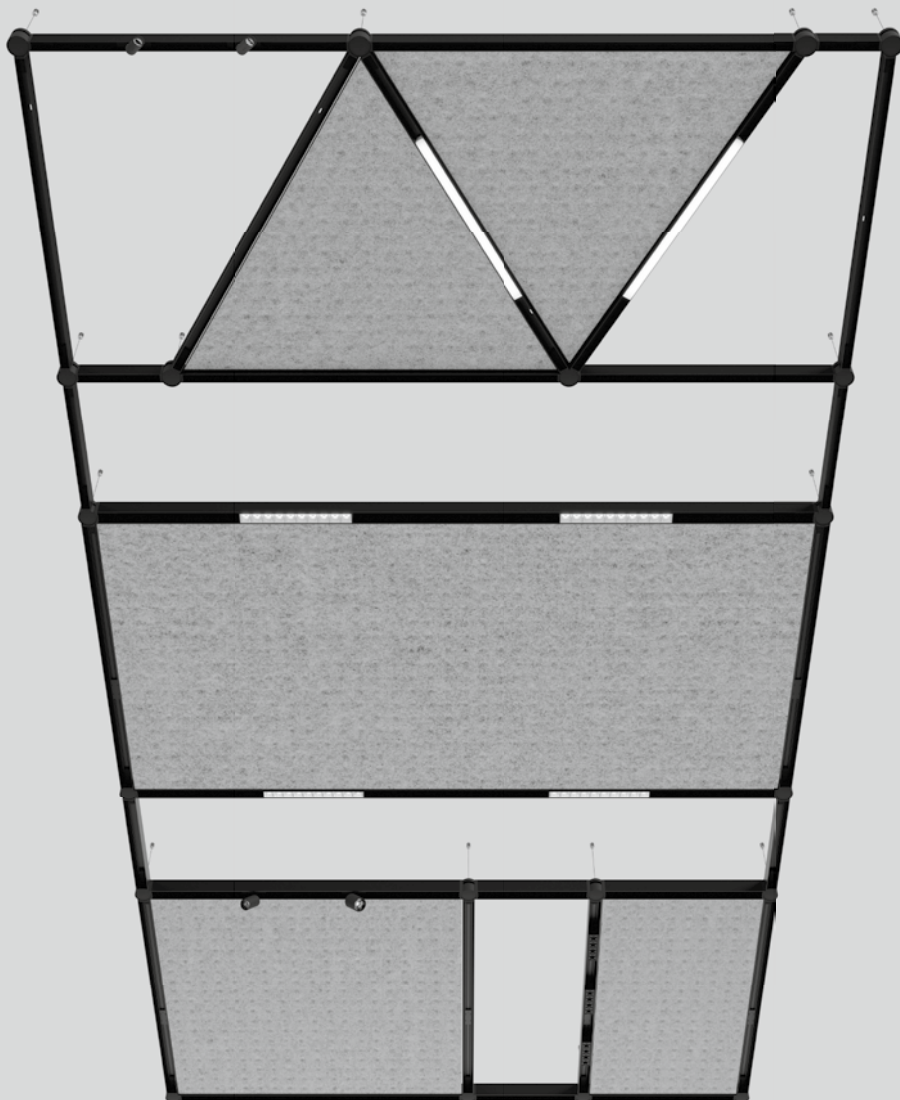

## MOVE IT 25/45 system

acoustic elements

**EN** Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; different versions: choice of square, rectangular or triangular design (only MOVE IT 25); high quality visual and tactile surface with embossed pattern; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25/45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools

**ES** Elemento acústico de fieltro PET reciclado y autoportante de calidad superior con propiedades de absorción del sonido; diferentes variantes: forma opcionalmente cuadrada, rectangular o triangular; superficie de alta calidad táctil y visual con motivos en relieve; posible inclusión de partículas extrañas; absorción del sonido directo y del reflejado por el techo; con ello gran rendimiento acústico; para la integración en el sistema suspendido MOVE IT 25/45, compuesto de uniones y perfiles; posible integración posterior en un MOVE IT suspended system ya instalado; instalación sin herramientas

### Quickinfo


PET felt

♻️ from recycled material


up to absorption class A

🔥 flame retardant version available


### Types

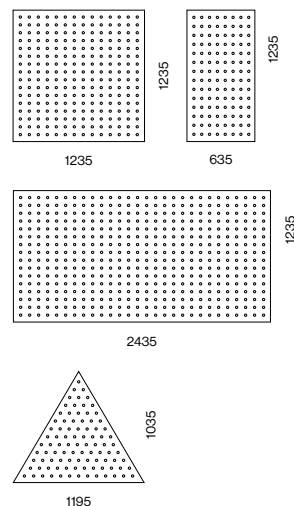


### Acoustic colours




flat acoustic inlay 25 mm



embossed finish




quick and easy to retrofit




sensor inset available

Order options

ACOUSTIC COLOUR	
<input type="radio"/> white	W
<input type="radio"/> marble grey	D
<input type="radio"/> anthracite	B
<input type="radio"/> black	L
<input type="radio"/> limestone	S

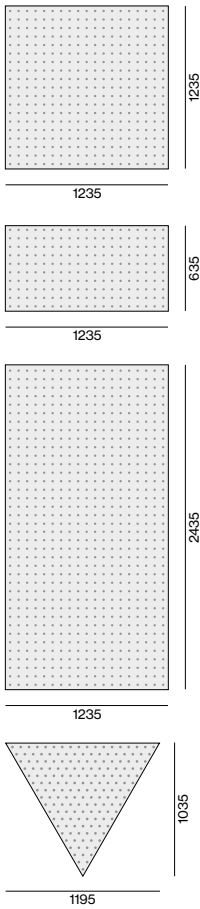

MOVE IT 25/45 acoustic suspended

 PET felt	<table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td colspan="5"><math>\alpha_w 1.00</math></td></tr></table>	A	B	C	D	E	$\alpha_w 1.00$					<table><tr><td>1.30</td></tr><tr><td>NRC</td></tr></table>	1.30	NRC	<table><tr><td>1.32</td></tr><tr><td>SAA</td></tr></table>	1.32	SAA
A	B	C	D	E													
$\alpha_w 1.00$																	
1.30																	
NRC																	
1.32																	
SAA																	


ACOUSTIC ELEMENT

TYPE	L·W·H (mm)	ORDER CODE
square grid inlay	1235·1235·25	050-231121 <input checked="" type="checkbox"/>
half grid inlay	635·1235·25	050-231221 <input checked="" type="checkbox"/>
double grid inlay	2435·1235·25	050-231321 <input checked="" type="checkbox"/>
triangle inlay*	1195·1035·25	050-231421 <input checked="" type="checkbox"/>

mounting only in MOVE IT 25/45 system with NODE connector + track 620 mm, 1220 mm or 2420 mm; \*only available for MOVE IT 25 system


Acoustic data

TYPE	Equivalent sound absorption area ( $A_{eq}$ )					
	125	250	500	1000	2000	4000 Hz
square grid inlay	0.73	1.47	1.73	2.20	2.67	2.77
half grid inlay	0.57	0.83	0.93	1.27	1.57	1.57
double grid inlay	1.30	2.73	3.20	4.10	4.97	5.23
triangle inlay	0.33	0.57	0.73	0.97	1.27	1.33

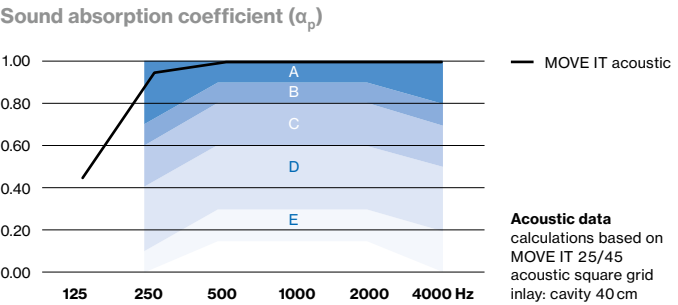


Configuration examples


MOVE IT 25 system

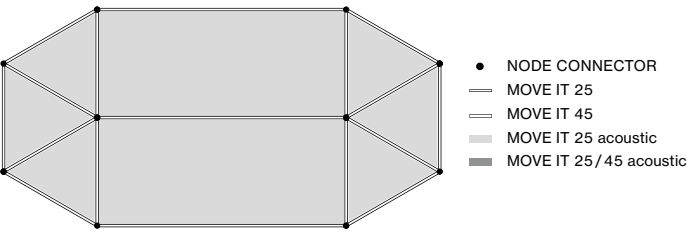

MOVE IT 45 system

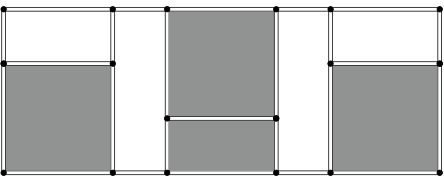

MOVE IT 25 / 45 system

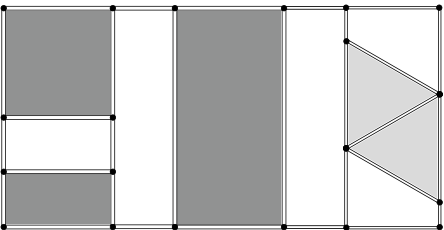

MOVE IT 25 system



MOVE IT 45 system