

MINO circle

acoustic elements

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; round design; high quality visual and tactile surface; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for insertion into MINO circle ceiling and MINO circle suspended; or single installation, choice of surface mounted and pendant versions with cable suspension; tool-less suspension height adjustment of the acoustic element

ES Elemento acústico de fieltro PET reciclado y autoportante de calidad superior con propiedades de absorción del sonido; forma redonda; superficie de gran calidad óptica y táctil; absorción del sonido directo y del reflejado por el techo; con ello gran rendimiento acústico; para insertar en MINO circle ceiling y MINO circle suspended; o montaje individual, opcionalmente superpuesto o colgado con cable; ajuste de altura sin herramientas en elemento acústico

Quickinfo

PET felt

♻️ from recycled material

🔥 flame retardant version available

3000K, 4000K

CRI ≥ 80, 3 SDCM

up to 154 lm/W


L90 @ 50000h

DALI-2


opal, microprismatic

Types


ceiling



suspended




inlay



Acoustic colours




Luminaire colours



Light distributions



direct indirect



flat height
24 mm



quick and easy
to retrofit




opal or micro-
prismatic cover

Order options

ACOUSTIC COLOUR	
<input type="radio"/> white	W
<input type="radio"/> marble grey	D
<input type="radio"/> anthracite	B
<input type="radio"/> black	L
<input type="radio"/> limestone	S


other colours on request



MINO circle acoustic ceiling

	A B C D E	1.15 NRC	1.16 SAA
$\alpha_w 0.70$			


TYPE	Ø-H (mm)	ORDER CODE
1000 ceiling	937-25	034-271111 <input checked="" type="checkbox"/>
1500 ceiling	1434-25	034-271211 <input checked="" type="checkbox"/>



MINO circle acoustic suspended

	A B C D E	0.70 NRC	0.74 SAA
$\alpha_w 0.65$			

TYPE	Ø-H (mm)	ORDER CODE
1000 suspended	937-25	034-272111 <input checked="" type="checkbox"/>
1500 suspended	1434-25	034-272211 <input checked="" type="checkbox"/>



MINO circle acoustic inlay

	A B C D E	0.70 NRC	0.74 SAA
$\alpha_w 0.65$			


TYPE	Ø-H (mm)	ORDER CODE
1000 inlay	937-25	034-270111 <input checked="" type="checkbox"/>
1500 inlay	1434-25	034-270211 <input checked="" type="checkbox"/>

Acoustic data

Equivalent sound absorption area (A_{eq})

TYPE	125	250	500	1000	2000	4000 Hz
1000 ceiling	0.10	0.27	0.70	1.17	1.07	1.00
1500 ceiling	0.30	0.60	1.43	2.30	2.17	2.10
1000 suspended/inlay	0.50	0.50	0.87	1.30	1.43	1.57
1500 suspended/inlay	0.97	1.20	1.83	2.67	3.07	3.30

Sound absorption coefficient (α_p)

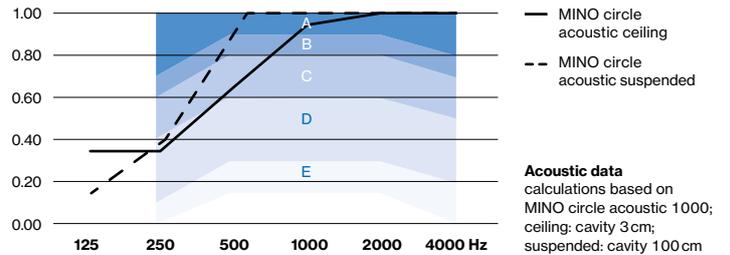

Order options


COLOUR TEMPERATURE	
3000K	5
4000K	6

MATERIAL COLOUR	
<input type="radio"/> pure white RAL 9010	7
<input type="radio"/> white aluminium RAL 9006	G
<input type="radio"/> jet black RAL 9005	8
<input type="radio"/> special colours*	X

*canopy always in white

LIGHT OPTIC COVER	
opal high performance	H
microprismatic	Z

LUMINOUS FLUX value calculated for 4000K, colour white, cover microprismatic



MINO 60 circle ceiling

RG0 IEC 62471	4 ADDR.	220-240V	X-PERT	X-PERT	CB

TYPE	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
1000	53W	7480lm	034-2112 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
1500	83W	12000lm	034-2110 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>

MINO 60 circle suspended

RG0 IEC 62471	4 ADDR.	220-240V	X-PERT	X-PERT	CB

TYPE	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
1000	53W	7480lm	034-2212 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
	71W	↓ 7480 / ± 3430lm	034-2213 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
1500	83W	12000lm	034-2210 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
	114W	↓ 12000 / ± 5490lm	034-2211 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>