



MINO 40

suspended


EN Luminaire housing from extruded aluminium profile, angular design; no visible screws; surface powder coated; luminaire profile can be pre-mounted; remaining luminaire components mounted without tools; pendant fitting with cable suspension; height adjustment without tools; incl. feeder cable; light inset consisting of highly reflective coated extruded profile for improved thermal management; HPO (High Performance Opal) cover for uniform illumination; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; optional high gloss reflector with faceted design; energy-efficient LEDs with very good colour rendering

ES Cuerpo de perfil de aluminio con diseño angular; sin tornillos visibles; superficie con recubrimiento de pintura en polvo; perfil de luminaria premontable; resto de componentes luminosos montables sin herramienta; suspendido con cable; altura regulable sin herramientas; incl. cable de alimentación; elemento de luz formado por perfil extruido con acabado altamente reflectante para una gestión térmica mejorada; difusor opal de alta calidad que proporciona una iluminación uniforme; cubierta microprismática de PMMA con lámina difusora para la reducción de iluminancia y un alumbrado homogéneo; opcional reflector de alto brillo con óptica facetada; LEDs de alta eficiencia que proporcionan una alta reproducción cromática

Quickinfo

3000 K, 4000 K
 CRI ≥ 90, 3 SDCM
 UGR ≤ 19 / 65° ≤ 1500 cd/m²
 up to 142 lm/W
 L90 @ 50 000 h
 DALI-2
 opal, microprismatic,
 reflector (UGR ≤ 19)

Types

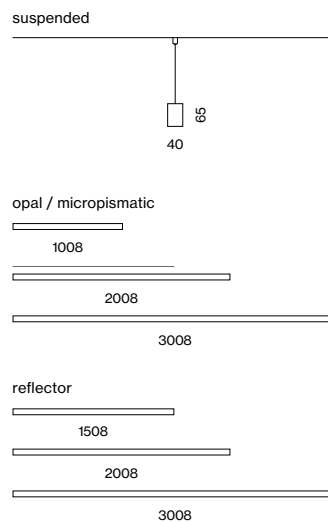

Colours



Light distributions



DiiA® standards
 251, 252, 253



DIN EN 12464-1
 UGR ≤ 19



system
 solution

Order options


COLOUR TEMPERATURE	
3000K	0
4000K	1

CONTROL	
DALI-2	


MATERIAL COLOUR	
<input type="radio"/> pure white RAL 9010	7
<input type="radio"/> traffic white RAL 9016	W
<input type="radio"/> white aluminium RAL 9006	G
<input checked="" type="radio"/> jet black RAL 9005	8

REFLECTOR COLOUR	
<input checked="" type="checkbox"/> chrome	R
<input type="checkbox"/> dark chrome	B

LIGHT OPTIC COVER	
<input checked="" type="checkbox"/> opal high performance	H
<input type="checkbox"/> microprismatic	Z
<input type="checkbox"/> reflector (UGR ≤ 19)	



MINO 40 suspended



MID LUMEN

SYS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
12.1W	3000K	1360lm	1008	0 4 2 - 1 2 1 2 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	1470lm		
23.4W	3000K	2720lm	2008	0 4 2 - 1 2 1 4 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	2940lm		
34W	3000K	4080lm	3008	0 4 2 - 1 2 1 6 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	4410lm		

HIGH LUMEN

SYS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.5W	3000K	2100lm	1008	0 4 2 - 1 2 2 2 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	2260lm		
36W	3000K	4190lm	2008	0 4 2 - 1 2 2 4 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	4530lm		
54W	3000K	6290lm	3008	0 4 2 - 1 2 2 6 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	6790lm		

REFLECTOR

SYS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
36W	3000K	4500lm	1508	0 4 2 - 1 2 1 3 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	4860lm		
47W	3000K	6010lm	2008	0 4 2 - 1 2 1 4 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	6490lm		
67W	3000K	8810lm	3008	0 4 2 - 1 2 1 6 :: 3 <input checked="" type="checkbox"/> <input type="checkbox"/>
	4000K	9510lm		