


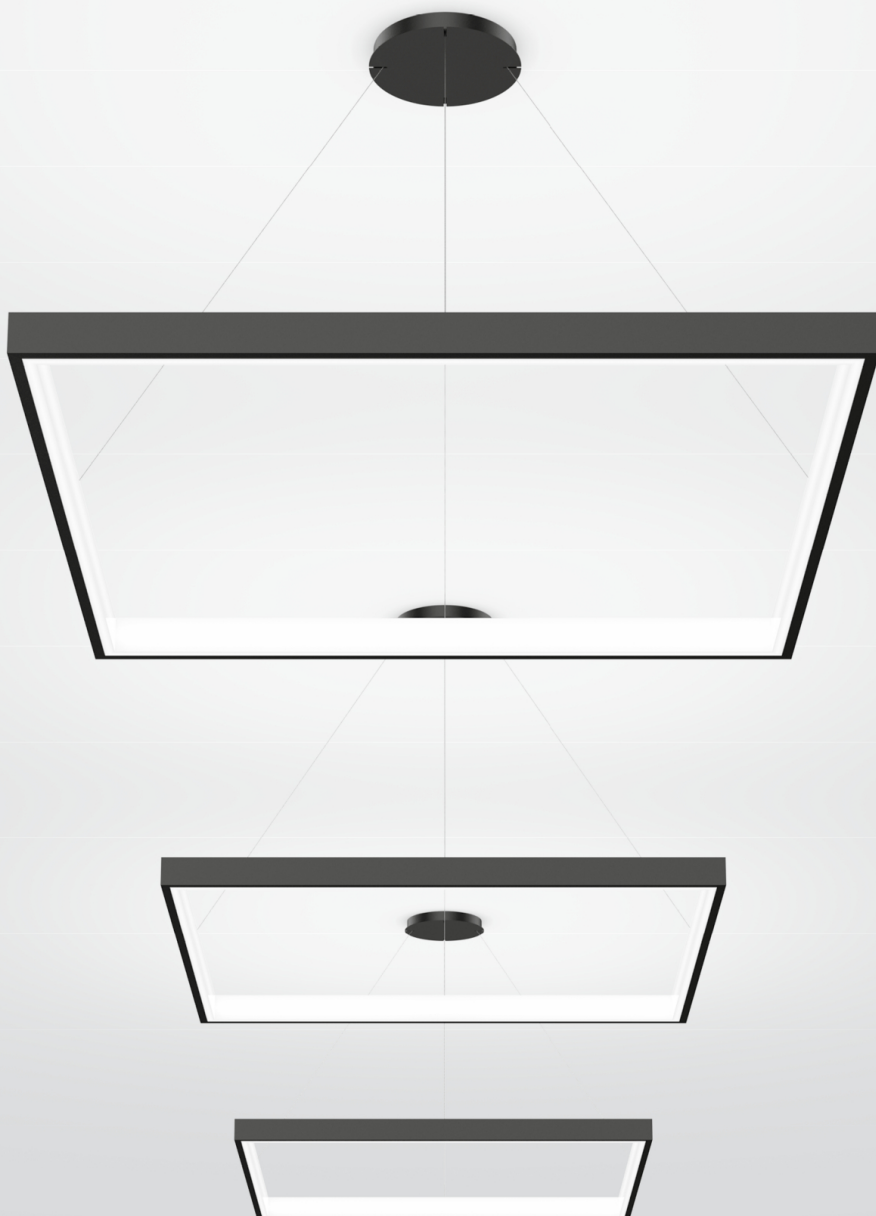

INO square

suspended


EN Square aluminium luminaire housing; surface powder coated; pendant fitting with cable suspension; height adjustment without tools; incl. transparent feed; electronic operating unit installed in the canopy; completely homogeneously illuminated, satinised PMMA cover; inwards facing emission characteristics; direct/indirect illumination characteristic for additional emphasis of the ceiling and more visual comfort; energy-efficient LEDs with very good colour rendering; canopy with 2 cable openings and plug-in terminal for through wiring

ES Cuerpo cuadrado de aluminio; superficie con recubrimiento de pintura en polvo; suspendido con cable; altura regulable sin herramientas; incluido cable de alimentación transparente; driver instalado en el baldaquino; tapa PMMA iluminada homogéneamente con acabado satinado; proyección orientada hacia el interior; iluminación directa/indirecta con un alto confort visual; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; baldaquino con abertura de 2 orificios para integrar el cableado y sencilla conexión

Quickinfo

2700 K, 3000 K, 4000 K
 CRI $\geq$ 90 / 3 SDCM
 hasta $\downarrow$ 4,770 lm / $\uparrow$ 4,760 lm
 hasta 122 lm/W
 L90 / 50000 h
 DALI-2
 High Performance Opal
 IP20

Types



Color



Distribución luminosa




DiiA® standards
 251, 252, 253





direct / indirect
 illumination



tunable white
 2700 – 6500 K
 (optional)



CRI $\geq$ 98
XPECTRUM
 (optional)





INO 750 square suspended



OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
39.0 W	2700 K	↓2170/↑2160 lm	111 lm/W	0 3 4 - 4 4 4 2 4 3 ☒ H
	3000 K	↓2280/↑2270 lm	117 lm/W	0 3 4 - 4 4 4 2 5 3 ☒ H
	4000 K	↓2390/↑2380 lm	122 lm/W	0 3 4 - 4 4 4 2 6 3 ☒ H




INO 1000 square suspended



OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
52.0 W	2700 K	↓2890/↑2890 lm	111 lm/W	0 3 4 - 4 4 4 3 4 3 ☒ H
	3000 K	↓3040/↑3030 lm	117 lm/W	0 3 4 - 4 4 4 3 5 3 ☒ H
	4000 K	↓3180/↑3170 lm	122 lm/W	0 3 4 - 4 4 4 3 6 3 ☒ H



INO 1250 square suspended





OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
65.0 W	2700 K	↓3610/↑3610 lm	111 lm/W	0 3 4 - 4 4 4 4 4 3 ☒ H
	3000 K	↓3790/↑3790 lm	117 lm/W	0 3 4 - 4 4 4 4 5 3 ☒ H
	4000 K	↓3970/↑3970 lm	122 lm/W	0 3 4 - 4 4 4 4 6 3 ☒ H

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
white aluminium RAL 9006	G
special colours	X



INO 1500 square suspended

CRI
≥ 90

220-240 V

1 ADDR.

X-PERT

X-PERT

OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
79.0 W	2700 K	↓4330/↑4330 lm	110 lm/W	0 3 4 - 4 4 4 5 4 3 H
	3000 K	↓4550/↑4550 lm	115 lm/W	0 3 4 - 4 4 4 5 5 3 H
	4000 K	↓4770/↑4760 lm	121 lm/W	0 3 4 - 4 4 4 5 6 3 H

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
white aluminium RAL 9006	G
special colours	X

Granitlab Coworking

Austria

Arquitecto

GHT-Plan GmbH

Lighting Design

GHT-Plan GmbH, AREA

C.I. Design GmbH

Fotografía

Kurt Kuball



Productos utilizados



UNICO Q1 / Q4 basic
ceiling



BETO suspended



INO square
suspended

