



LED Strips

recessed/surface

EN High quality extruded aluminium profile, angular design; surface anodised; flexible use in recessed or surface mounting; in combination with 3 different covers and compatible with 3 different LED or 2 COB strips


DE Hochwertiges Aluminiumstrangpressprofil, kantige Ausführung; Oberfläche eloxiert; flexibel einsetzbar in Einbau- oder Anbaumontage; in Kombination mit 3 verschiedenen Abdeckungen und kompatibel mit 3 verschiedenen LED- bzw. 2 COB-Stripes

Quickinfo


2700K, 3000K, 4000K
CRI ≥ 90, 2 SDCM
up to 136lm/W
IP 20

Types

Profiles



LED/COB Strips



Colour



Light distribution




direct

Order options


COLOUR TEMPERATURE	
2700 K	9
3000 K	0
4000 K	1

Profiles




RECESSED WITH TRIM

TYPE	L-W-H (mm)	ORDER CODE
recessed with trim	2500-25-13	0 1 1 - 7 3 2 1 1 1 6



RECESSED/SURFACE TRIMLESS


TYPE	L-W-H (mm)	ORDER CODE
recessed/surface trimless	2500-16-7	0 1 1 - 7 3 0 1 1 1 6



RECESSED/SURFACE TRIMLESS


TYPE	L-W-H (mm)	ORDER CODE
recessed/surface trimless	2500-16-13	0 1 1 - 7 3 1 1 1 1 6

LED / COB Strips



LED LOW POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
8.7 W/m	1090 lm/m	62.5 mm	0 1 1 - 7 0 0 1 1 0




LED MID POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
14.3 W/m	1585 lm/m	50 mm	0 1 1 - 7 0 1 1 1 0




LED HIGH POWER free-cutting

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
16.8 W/m	2285 lm/m	5 mm	0 1 1 - 7 0 2 1 1 0



COB MID POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
11.2 W/m	830 lm/m	55.5 mm	0 1 1 - 7 0 3 1 1 0



COB HIGH POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
16.8 W/m	1350 lm/m	29.41 mm	0 1 1 - 7 0 4 1 1 0

Optical accessories

LIGHT OPTIC COVER

TYPE	L (mm)	ORDER CODE
microprismatic	2500	0 1 1 - 7 3 8 1 1 1 0 P
opal	2500	0 1 1 - 7 3 8 1 1 1 0 O
transparent	2500	0 1 1 - 7 3 8 1 1 1 0 T


Mounting accessories

END CAPS

TYPE	PCS	ORDER CODE
recessed with trim	2	0 1 1 - 7 3 2 9 1 1 6
recessed/surface trimless (H 7mm)	2	0 1 1 - 7 3 0 9 1 1 6
recessed/surface trimless (H 13mm)	2	0 1 1 - 7 3 1 9 1 1 6

MOUNTING CLIPS

TYPE	PCS	ORDER CODE
recessed with trim	4	0 1 1 - 7 3 0 9 4 1 6
surface trimless	4	0 1 1 - 7 3 0 9 2 1 6
surface trimless 0-180° adjustable	4	0 1 1 - 7 3 0 9 3 1 6

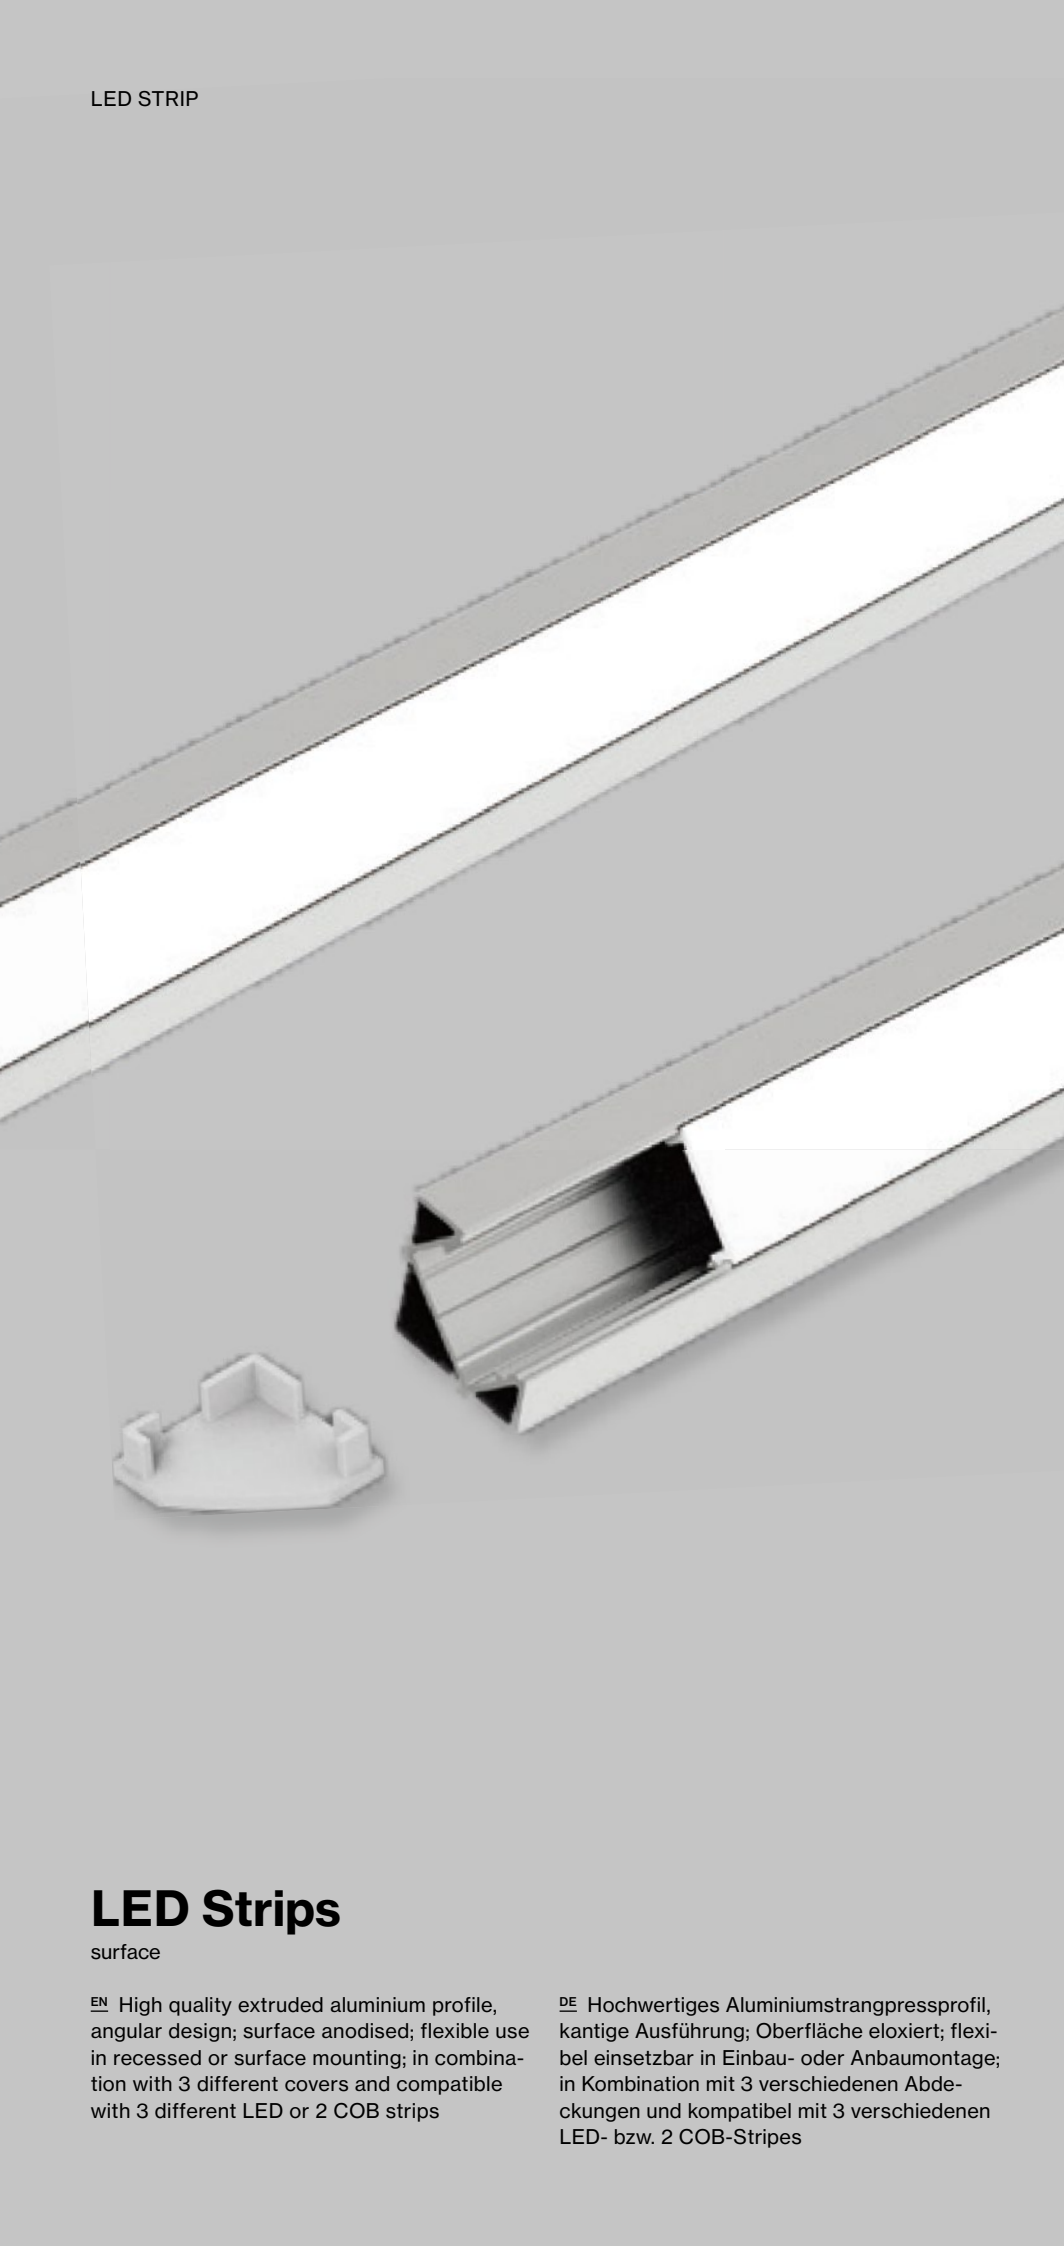


Quickinfo


2700K, 3000K, 4000K
CRI $\geq$ 90, 2 SDCM
up to 136lm/W
IP 20

Types

Profiles



LED/COB Strips



Colour



Light distribution



direct

LED Strips


surface

EN High quality extruded aluminium profile, angular design; surface anodised; flexible use in recessed or surface mounting; in combination with 3 different covers and compatible with 3 different LED or 2 COB strips

DE Hochwertiges Aluminiumstrangpressprofil, kantige Ausführung; Oberfläche eloxiert; flexibel einsetzbar in Einbau- oder Anbaumontage; in Kombination mit 3 verschiedenen Abdeckungen und kompatibel mit 3 verschiedenen LED- bzw. 2 COB-Stripes

Order options



COLOUR TEMPERATURE	
2700 K	9
3000 K	0
4000 K	1




Profile incl. opal cover

SURFACE			
TYPE		L-W-H (mm)	ORDER CODE
corner		2500-18-18	0 1 1 - 3 3 1 1 1 6 0


LED / COB Strips




LED LOW POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
8.7 W/m	1090 lm/m	62.5 mm	0 1 1 - 7 0 0 1 1 0




LED MID POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
14.3 W/m	1585 lm/m	50 mm	0 1 1 - 7 0 1 1 1 0



LED HIGH POWER free-cutting			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
16.8 W/m	2285 lm/m	5 mm	0 1 1 - 7 0 2 1 1 0



COB MID POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
11.2 W/m	830 lm/m	55.5 mm	0 1 1 - 7 0 3 1 1 0



COB HIGH POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
16.8 W/m	1350 lm/m	29.41 mm	0 1 1 - 7 0 4 1 1 0

Mounting accessories

END CAPS			
TYPE		PCS	ORDER CODE
corner		2	0 1 1 - 7 3 3 9 1 1 6

MOUNTING CLIPS			
TYPE		PCS	ORDER CODE
surface		4	0 1 1 - 7 3 3 9 2 1 6

Power supplies 24V DC, IP 20**non DIM**

TYPE		L·W·H (mm)	ORDER CODE
18 W	non DIM	127·43·30	0 1 1 - 7 9 0 0 0 1 0
30 W linear	non DIM	246·30·16	0 1 1 - 7 9 0 0 1 1 0
35 W	non DIM	142·43·30	0 1 1 - 7 9 0 0 2 1 0
60 W	non DIM	225·43·30	0 1 1 - 7 9 0 0 3 1 0
60 W linear	non DIM	298·30·16	0 1 1 - 7 9 0 0 4 1 0
100 W	non DIM	250·43·30	0 1 1 - 7 9 0 0 5 1 0
100 W linear	non DIM	298·30·17	0 1 1 - 7 9 0 0 6 1 0
200 W	non DIM	325·43·30	0 1 1 - 7 9 0 0 7 1 0

DALI-2

TYPE		L·W·H (mm)	ORDER CODE
18 W	DALI-2	175·43·30	0 1 1 - 7 9 0 0 0 3 0
35 W	DALI-2	195·43·30	0 1 1 - 7 9 0 0 1 3 0
60 W	DALI-2	225·43·30	0 1 1 - 7 9 0 0 2 3 0
100 W	DALI-2	295·43·30	0 1 1 - 7 9 0 0 3 3 0
150 W	DALI-2	325·43·30	0 1 1 - 7 9 0 0 4 3 0

CASAMBI

TYPE		L·W·H (mm)	ORDER CODE
35 W	Casambi	195·43·30	0 1 1 - 7 9 0 0 0 9 0
100 W	Casambi	295·43·30	0 1 1 - 7 9 0 0 1 9 0

DIN RAIL

TYPE		L·W·H (mm)	ORDER CODE
100 W	DIN Rail	70·55·90	0 1 1 - 7 9 1 0 0 1 0
150 W	DIN Rail	105·55·90	0 1 1 - 7 9 1 0 1 1 0

Power supplies 24V DC, IP 65, IP 67**non DIM | IP 65**

TYPE		L·W·H (mm)	ORDER CODE
60 W IP 65	non DIM	171·62·37	0 1 1 - 7 9 2 0 0 1 0
100 W IP 65	non DIM	220·68·39	0 1 1 - 7 9 2 0 1 1 0
150 W IP 65	non DIM	228·68·39	0 1 1 - 7 9 2 0 2 1 0
240 W IP 65	non DIM	244·68·39	0 1 1 - 7 9 2 0 3 1 0
320 W IP 65	non DIM	252·90·44	0 1 1 - 7 9 2 0 4 1 0

DALI-2 | IP 67

TYPE		L·W·H (mm)	ORDER CODE
150 W IP 67	DALI-2	219·63·36	0 1 1 - 7 9 2 0 0 3 0
240 W IP 67	DALI-2	244·71·38	0 1 1 - 7 9 2 0 1 3 0