



UNICO L4 / L6 basic

recessed

EN Rectangular recessed multi-downlight made of die-cast aluminium; equipped with four (L4) / six (L6) individually selectable or pre-specified, customised light elements; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation possible in different housings; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

ES Luz múltiple empotrable descendente rectangular para montar, de aluminio de colada a presión; equipada con cuatro (L4) / seis (L6) sistemas de lentes elegibles individualmente o de definición fija, específicos para la aplicación; instalación sin herramientas mediante kit de montaje con sistema inserción de bola; montaje eléctrico sencillo con conexión enchufable protegida contra la polarización inversa; apropiada para espesores de techo de 2-25 mm; superficie con recubrimiento de pintura en polvo; posibilidad de instalar distintas carcasas; reflector de alta calidad con superficie de múltiples facetas revestida con aluminio por vaporización; proyección precisa con varias distribuciones de la luz distintas simétricas; o con distribución de luz asimétrica; LEDs de alta eficiencia que proporcionan una alta reproducción cromática; sin reverberación

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
 UGR \leq 10, UGR \leq 16, UGR \leq 19 hasta 134 lm/W
 L85 / 50000 h, L90 / 50000 h
 DALI-2, non attenuable
 front IP20

Types



Color



Set de montaje



Distribución luminosa




DiiA® standards
 251, 252, 253



one luminaire
 multiple scenes




plug / socket
 connector




black & gold
 reflector
 (optional)



tunable white
 2700 – 5000 K
 (optional)



UNICO L4 basic high efficient



FLOOD ROUND 46°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 11.6 W | 2700 K | 1330 lm | 115 lm/W | 0 9 0 - 7 L 4 9 ◊ C 0 ■ 3 1 |
| | 3000 K | 1330 lm | 115 lm/W | 0 9 0 - 7 L 4 0 ◊ C 0 ■ 3 1 |
| | 3500 K | 1380 lm | 119 lm/W | 0 9 0 - 7 L 4 2 ◊ C 0 ■ 3 1 |
| | 4000 K | 1410 lm | 122 lm/W | 0 9 0 - 7 L 4 1 ◊ C 0 ■ 3 1 |

WIDE FLOOD ROUND 71°, CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 11.6 W | 2700 K | 1360 lm | 117 lm/W | 0 9 0 - 7 L 4 9 ◊ D 0 ■ 3 1 |
| | 3000 K | 1360 lm | 117 lm/W | 0 9 0 - 7 L 4 0 ◊ D 0 ■ 3 1 |
| | 3500 K | 1420 lm | 122 lm/W | 0 9 0 - 7 L 4 2 ◊ D 0 ■ 3 1 |
| | 4000 K | 1450 lm | 125 lm/W | 0 9 0 - 7 L 4 1 ◊ D 0 ■ 3 1 |

FLOOD SQUARE 54°, CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 11.6 W | 2700 K | 1390 lm | 120 lm/W | 0 9 0 - 7 L 4 9 ◊ F 0 ■ 3 1 |
| | 3000 K | 1390 lm | 120 lm/W | 0 9 0 - 7 L 4 0 ◊ F 0 ■ 3 1 |
| | 3500 K | 1450 lm | 125 lm/W | 0 9 0 - 7 L 4 2 ◊ F 0 ■ 3 1 |
| | 4000 K | 1480 lm | 128 lm/W | 0 9 0 - 7 L 4 1 ◊ F 0 ■ 3 1 |

WIDE FLOOD SQUARE 71°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 11.6 W | 2700 K | 1430 lm | 123 lm/W | 0 9 0 - 7 L 4 9 ◊ G 0 ■ 3 1 |
| | 3000 K | 1430 lm | 123 lm/W | 0 9 0 - 7 L 4 0 ◊ G 0 ■ 3 1 |
| | 3500 K | 1490 lm | 128 lm/W | 0 9 0 - 7 L 4 2 ◊ G 0 ■ 3 1 |
| | 4000 K | 1520 lm | 131 lm/W | 0 9 0 - 7 L 4 1 ◊ G 0 ■ 3 1 |



UNICO L4 basic



SPOT ROUND 15°, chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 13.1 W | 2700 K | 816 lm | 62 lm/W | 0 9 0 - 7 L 4 4 ◊ K 0 0 2 1 |
| | 3000 K | 870 lm | 66 lm/W | 0 9 0 - 7 L 4 5 ◊ K 0 0 2 1 |
| | 4000 K | 934 lm | 71 lm/W | 0 9 0 - 7 L 4 6 ◊ K 0 0 2 1 |

Order options

| CONTROL | ◊ | COLOUR | ■ | COLOUR | |
|---------|---|------------------|---|---------------|----------|
| non DIM | 1 | black reflector | B | jet black | RAL 9005 |
| DALI-2 | 3 | chrome reflector | O | traffic white | RAL 9016 |

NARROW MEDIUM ROUND 22°, chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 830 lm | 63 lm/W | 0 9 0 - 7 L 4 4 <input checked="" type="checkbox"/> N 0 0 2 1 |
| | 3000 K | 884 lm | 67 lm/W | 0 9 0 - 7 L 4 5 <input checked="" type="checkbox"/> N 0 0 2 1 |
| | 4000 K | 949 lm | 72 lm/W | 0 9 0 - 7 L 4 6 <input checked="" type="checkbox"/> N 0 0 2 1 |

MEDIUM ROUND 33°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1110 lm | 85 lm/W | 0 9 0 - 7 L 4 4 <input checked="" type="checkbox"/> B 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1180 lm | 90 lm/W | 0 9 0 - 7 L 4 5 <input checked="" type="checkbox"/> B 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1270 lm | 97 lm/W | 0 9 0 - 7 L 4 6 <input checked="" type="checkbox"/> B 0 <input checked="" type="checkbox"/> 2 1 |

FLOOD ROUND 49°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1280 lm | 98 lm/W | 0 9 0 - 7 L 4 4 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1360 lm | 104 lm/W | 0 9 0 - 7 L 4 5 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1460 lm | 111 lm/W | 0 9 0 - 7 L 4 6 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 2 1 |

WIDE FLOOD ROUND 72°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1260 lm | 96 lm/W | 0 9 0 - 7 L 4 4 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1350 lm | 103 lm/W | 0 9 0 - 7 L 4 5 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1440 lm | 110 lm/W | 0 9 0 - 7 L 4 6 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 2 1 |

MEDIUM SQUARE 32°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1090 lm | 83 lm/W | 0 9 0 - 7 L 4 4 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1160 lm | 89 lm/W | 0 9 0 - 7 L 4 5 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1250 lm | 95 lm/W | 0 9 0 - 7 L 4 6 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |

FLOOD SQUARE 56°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1300 lm | 99 lm/W | 0 9 0 - 7 L 4 4 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1380 lm | 105 lm/W | 0 9 0 - 7 L 4 5 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1480 lm | 113 lm/W | 0 9 0 - 7 L 4 6 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |

WIDE FLOOD SQUARE 71°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1330 lm | 102 lm/W | 0 9 0 - 7 L 4 4 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1420 lm | 108 lm/W | 0 9 0 - 7 L 4 5 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1520 lm | 116 lm/W | 0 9 0 - 7 L 4 6 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |

Order options



| CONTROL | | COLOUR | | COLOUR | |
|---------|---------------------------------------|------------------|---------------------------------------|---------------|----------|
| non DIM | <input checked="" type="checkbox"/> 1 | black reflector | <input checked="" type="checkbox"/> B | jet black | RAL 9005 |
| DALI-2 | <input checked="" type="checkbox"/> 3 | chrome reflector | <input checked="" type="checkbox"/> 0 | traffic white | RAL 9016 |

WALLWASHER chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1130 lm | 86 lm/W | 0 9 0 - 7 L 4 4 \blacklozenge A 0 0 2 1 |
| | 3000 K | 1200 lm | 92 lm/W | 0 9 0 - 7 L 4 5 \blacklozenge A 0 0 2 1 |
| | 4000 K | 1290 lm | 98 lm/W | 0 9 0 - 7 L 4 6 \blacklozenge A 0 0 2 1 |

WALL FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|--|
| 13.1 W | 2700 K | 1180 lm | 90 lm/W | 0 9 0 - 7 L 4 4 \blacklozenge W 0 \blacksquare 2 2 |
| | 3000 K | 1250 lm | 95 lm/W | 0 9 0 - 7 L 4 5 \blacklozenge W 0 \blacksquare 2 2 |
| | 4000 K | 1340 lm | 102 lm/W | 0 9 0 - 7 L 4 6 \blacklozenge W 0 \blacksquare 2 2 |

**UNICO L6** basic high efficient**FLOOD ROUND** 46°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|--|
| 17.0 W | 2700 K | 1980 lm | 116 lm/W | 0 9 0 - 7 L 6 9 \blacklozenge C 0 \blacksquare 3 1 |
| | 3000 K | 1980 lm | 116 lm/W | 0 9 0 - 7 L 6 0 \blacklozenge C 0 \blacksquare 3 1 |
| | 3500 K | 2060 lm | 121 lm/W | 0 9 0 - 7 L 6 2 \blacklozenge C 0 \blacksquare 3 1 |
| | 4000 K | 2110 lm | 124 lm/W | 0 9 0 - 7 L 6 1 \blacklozenge C 0 \blacksquare 3 1 |

WIDE FLOOD ROUND 71°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|--|
| 17.0 W | 2700 K | 2040 lm | 120 lm/W | 0 9 0 - 7 L 6 9 \blacklozenge D 0 \blacksquare 3 1 |
| | 3000 K | 2040 lm | 120 lm/W | 0 9 0 - 7 L 6 0 \blacklozenge D 0 \blacksquare 3 1 |
| | 3500 K | 2120 lm | 125 lm/W | 0 9 0 - 7 L 6 2 \blacklozenge D 0 \blacksquare 3 1 |
| | 4000 K | 2170 lm | 128 lm/W | 0 9 0 - 7 L 6 1 \blacklozenge D 0 \blacksquare 3 1 |

FLOOD SQUARE 54°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|--|
| 17.0 W | 2700 K | 2080 lm | 122 lm/W | 0 9 0 - 7 L 6 9 \blacklozenge F 0 \blacksquare 3 1 |
| | 3000 K | 2080 lm | 122 lm/W | 0 9 0 - 7 L 6 0 \blacklozenge F 0 \blacksquare 3 1 |
| | 3500 K | 2170 lm | 128 lm/W | 0 9 0 - 7 L 6 2 \blacklozenge F 0 \blacksquare 3 1 |
| | 4000 K | 2210 lm | 130 lm/W | 0 9 0 - 7 L 6 1 \blacklozenge F 0 \blacksquare 3 1 |

WIDE FLOOD SQUARE 71°, CRI ≥ 90



| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|--|
| 17.0 W | 2700 K | 2140 lm | 126 lm/W | 0 9 0 - 7 L 6 9 \blacklozenge G 0 \blacksquare 3 1 |
| | 3000 K | 2140 lm | 126 lm/W | 0 9 0 - 7 L 6 0 \blacklozenge G 0 \blacksquare 3 1 |
| | 3500 K | 2230 lm | 131 lm/W | 0 9 0 - 7 L 6 2 \blacklozenge G 0 \blacksquare 3 1 |
| | 4000 K | 2270 lm | 134 lm/W | 0 9 0 - 7 L 6 1 \blacklozenge G 0 \blacksquare 3 1 |

Order options

| CONTROL | \blacklozenge | COLOUR | \blacksquare | COLOUR | |
|---------|-----------------|------------------|----------------|---------------|----------|
| non DIM | 1 | black reflector | B | jet black | RAL 9005 |
| DALI-2 | 3 | chrome reflector | 0 | traffic white | RAL 9016 |



UNICO L6 basic



SPOT ROUND 15°, chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 18.6 W | 2700 K | 1170 lm | 63 lm/W | 0 9 0 - 7 L 6 4 ◆ K 0 0 2 1 |
| | 3000 K | 1250 lm | 67 lm/W | 0 9 0 - 7 L 6 5 ◆ K 0 0 2 1 |
| | 4000 K | 1340 lm | 72 lm/W | 0 9 0 - 7 L 6 6 ◆ K 0 0 2 1 |

NARROW MEDIUM ROUND 22°, chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 18.6 W | 2700 K | 1190 lm | 64 lm/W | 0 9 0 - 7 L 6 4 ◆ N 0 0 2 1 |
| | 3000 K | 1270 lm | 68 lm/W | 0 9 0 - 7 L 6 5 ◆ N 0 0 2 1 |
| | 4000 K | 1360 lm | 73 lm/W | 0 9 0 - 7 L 6 6 ◆ N 0 0 2 1 |

MEDIUM ROUND 33°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---------------------------|
| 18.6 W | 2700 K | 1590 lm | 85 lm/W | 0 9 0 - 7 L 6 4 ◆ B 0 2 1 |
| | 3000 K | 1690 lm | 91 lm/W | 0 9 0 - 7 L 6 5 ◆ B 0 2 1 |
| | 4000 K | 1820 lm | 98 lm/W | 0 9 0 - 7 L 6 6 ◆ B 0 2 1 |

FLOOD ROUND 49°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---------------------------|
| 18.6 W | 2700 K | 1830 lm | 98 lm/W | 0 9 0 - 7 L 6 4 ◆ C 0 2 1 |
| | 3000 K | 1950 lm | 105 lm/W | 0 9 0 - 7 L 6 5 ◆ C 0 2 1 |
| | 4000 K | 2090 lm | 112 lm/W | 0 9 0 - 7 L 6 6 ◆ C 0 2 1 |

WIDE FLOOD ROUND 72°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---------------------------|
| 18.6 W | 2700 K | 1810 lm | 97 lm/W | 0 9 0 - 7 L 6 4 ◆ D 0 2 1 |
| | 3000 K | 1930 lm | 104 lm/W | 0 9 0 - 7 L 6 5 ◆ D 0 2 1 |
| | 4000 K | 2070 lm | 111 lm/W | 0 9 0 - 7 L 6 6 ◆ D 0 2 1 |

MEDIUM SQUARE 32°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---------------------------|
| 18.6 W | 2700 K | 1560 lm | 84 lm/W | 0 9 0 - 7 L 6 4 ◆ E 0 2 1 |
| | 3000 K | 1660 lm | 89 lm/W | 0 9 0 - 7 L 6 5 ◆ E 0 2 1 |
| | 4000 K | 1790 lm | 96 lm/W | 0 9 0 - 7 L 6 6 ◆ E 0 2 1 |

FLOOD SQUARE 56°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---------------------------|
| 18.6 W | 2700 K | 1860 lm | 100 lm/W | 0 9 0 - 7 L 6 4 ◆ F 0 2 1 |
| | 3000 K | 1980 lm | 106 lm/W | 0 9 0 - 7 L 6 5 ◆ F 0 2 1 |
| | 4000 K | 2120 lm | 114 lm/W | 0 9 0 - 7 L 6 6 ◆ F 0 2 1 |

Order options

| CONTROL | ◆ | COLOUR | ■ | COLOUR | |
|---------|---|------------------|---|---------------|----------|
| non DIM | 1 | black reflector | B | jet black | RAL 9005 |
| DALI-2 | 3 | chrome reflector | 0 | traffic white | RAL 9016 |

RECTANGULAR MEDIUM 34°x69°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 18.6 W | 2700 K | 1610 lm | 87 lm/W | 0 9 0 - 7 L 6 4 ◆ R 0 ■ 2 1 |
| | 3000 K | 1720 lm | 92 lm/W | 0 9 0 - 7 L 6 5 ◆ R 0 ■ 2 1 |
| | 4000 K | 1840 lm | 99 lm/W | 0 9 0 - 7 L 6 6 ◆ R 0 ■ 2 1 |

WIDE FLOOD SQUARE 71°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 18.6 W | 2700 K | 1910 lm | 103 lm/W | 0 9 0 - 7 L 6 4 ◆ G 0 ■ 2 1 |
| | 3000 K | 2030 lm | 109 lm/W | 0 9 0 - 7 L 6 5 ◆ G 0 ■ 2 1 |
| | 4000 K | 2180 lm | 117 lm/W | 0 9 0 - 7 L 6 6 ◆ G 0 ■ 2 1 |

WALLWASHER chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 18.6 W | 2700 K | 1610 lm | 87 lm/W | 0 9 0 - 7 L 6 4 ◆ A 0 0 2 1 |
| | 3000 K | 1720 lm | 92 lm/W | 0 9 0 - 7 L 6 5 ◆ A 0 0 2 1 |
| | 4000 K | 1850 lm | 99 lm/W | 0 9 0 - 7 L 6 6 ◆ A 0 0 2 1 |

WALL FLOOR CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 18.6 W | 2700 K | 1680 lm | 90 lm/W | 0 9 0 - 7 L 6 4 ◆ W 0 ■ 2 1 |
| | 3000 K | 1800 lm | 97 lm/W | 0 9 0 - 7 L 6 5 ◆ W 0 ■ 2 1 |
| | 4000 K | 1930 lm | 104 lm/W | 0 9 0 - 7 L 6 6 ◆ W 0 ■ 2 1 |

Order options

| CONTROL | ◆ | COLOUR | ■ | COLOUR | |
|---------|---|------------------|---|---------------|----------|
| non DIM | 1 | black reflector | B | jet black | RAL 9005 |
| DALI-2 | 3 | chrome reflector | O | traffic white | RAL 9016 |

Planning Information

L4 RECESSED

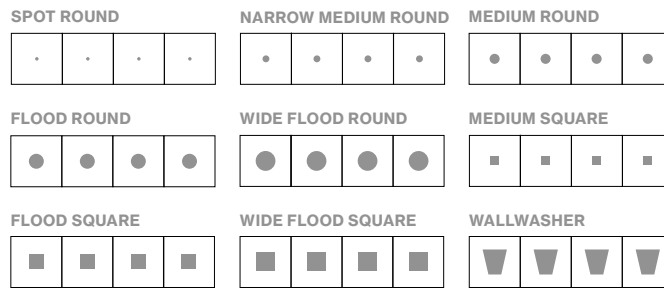


WALL + FLOOR



4x wallwasher floor

L6 RECESSED

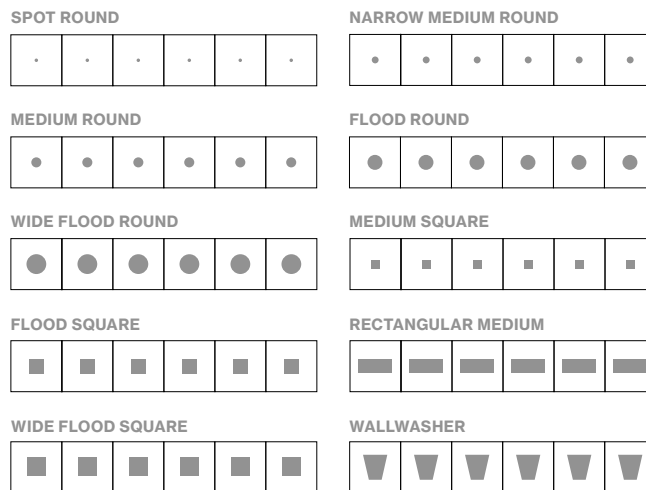


WALL + FLOOR



6x wallwasher floor

Electrical mounting accessories (optional)



THROUGH WIRING CONNECTION BOX


| TYPE | L-W-H (mm) | ORDER CODE |
|---------------------------|------------|-----------------------|
| non DIM cable ø 4 – 12 mm | 105-58-30 | 0 0 5 - 2 5 3 1 1 1 0 |
| DALI cable ø 4 – 12 mm | 105-58-30 | 0 0 5 - 2 5 5 1 1 1 0 |

Linect®-Ready

Order options

| CONTROL | COLOUR | COLOUR | COLOUR |
|---------|--------|------------------|--------------------------|
| non DIM | 1 | black reflector | B jet black RAL 9005 |
| DALI-2 | 3 | chrome reflector | 0 traffic white RAL 9016 |

Mounting accessories (required)



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS

12.5/15/20/25 mm


for UNICO L4

L-W-H (mm)

160-47-47

ORDER CODE

0 9 0 - 7 L 4 0 1 0 0



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS

12.5/15/20/25 mm


for UNICO L6

L-W-H (mm)

235-47-47

ORDER CODE

0 9 0 - 7 L 6 0 1 0 0



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR

jet black

traffic white

for UNICO L4

L-W-H (mm)


176-63-30

176-63-30

ORDER CODE

0 9 0 - 7 L 4 0 2 0 B

0 9 0 - 7 L 4 0 2 0 W



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR

jet black

traffic white

for UNICO L6

L-W-H (mm)

251-63-30

251-63-30

ORDER CODE

0 9 0 - 7 L 6 0 2 0 B

0 9 0 - 7 L 6 0 2 0 W

Order options

CONTROL

non DIM

DALI-2



COLOUR

1

black reflector

3

chrome reflector



COLOUR

B

jet black

0

traffic white

RAL 9005

RAL 9016

Gasthaus Vilsalpsee, Tannheim

Austria

Arquitecto
Mario Gasser
Architecture

Fotografía
Christian Flatscher Mario
Gasser Architecture



Productos utilizados



UNICO L4 / L6
recessed



UNICO L4 / L6 basic
recessed



SASSO 60 round wall



