


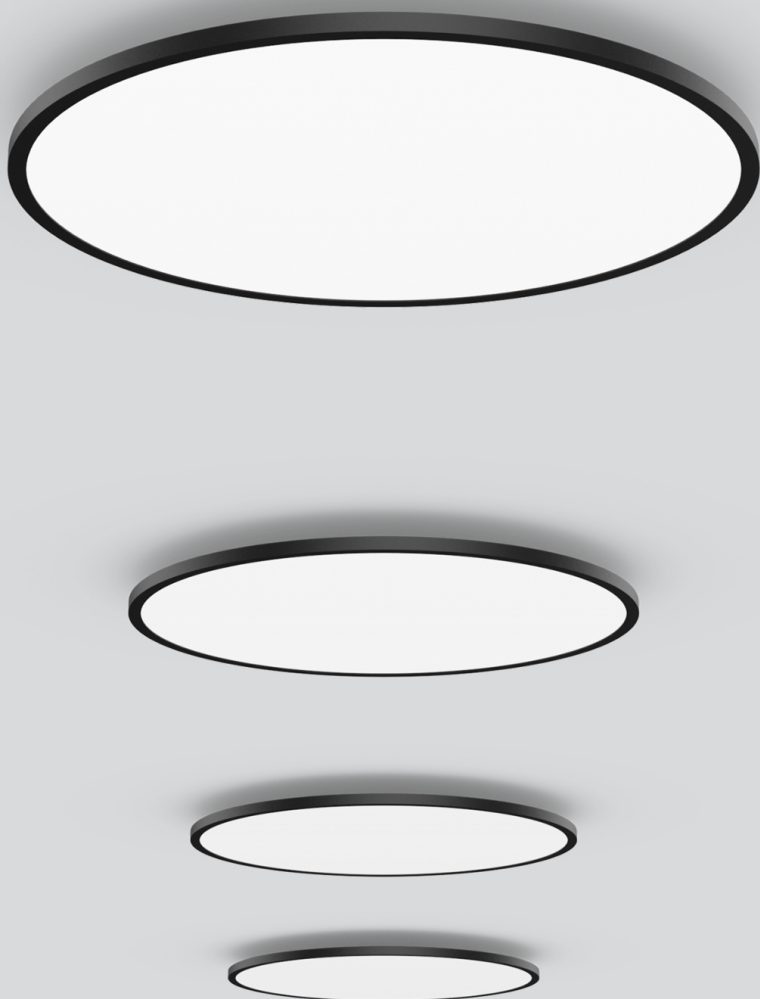

TASK round

surface


^{EN} Round luminaire housing in aluminium; ultra low-profile design (only 15 mm); surface powder coated; convenient quick mounting system without tools; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; luminaire with 2 cable openings and plug-in terminals for through wiring; sound absorbing accessories available

^{ES} Luminaria redonda de aluminio; perfil extra plano (sólo 15 mm); superficie con recubrimiento de pintura en polvo; sistema de montaje rápido sin herramientas; distribución de luz directa a través de cuerpo LGP (Light Guiding Prism); la luz acoplada lateralmente se orienta hacia abajo por medio de un grabado por láser; orientación luz por medio de un elemento altamente reflectante; iluminación homogénea; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; luminaria con abertura de 2 orificios para integrar cableado y sencilla conexión; disponible accesorio para la absorción del ruido

Quickinfo

3000 K, 4000 K
 CRI ≥ 90 / 3 SDCM (initial MacAdam)
 UGR ≤ 19
 hasta 138 lm/W
 L90 / 50000 h
 DALI-2
 Microprismatic
 IP40

Types



Color



Distribución luminosa



DiiA® standards
 251, 252, 253




DIN EN 12464-1
 UGR ≤ 19




easy mounting
 by click-
 mechanism




acoustic
 elements





CRI ≥ 98
 XPECTRUM
 (optional)

**TASK 300** round surface**MICROPRISMATIC | DIRECT** CRI ≥ 90, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.5 W	3000 K	1020 lm	97 lm/W	0 5 9 - 0 1 5 0 0 3 ☒ P
	4000 K	1080 lm	103 lm/W	0 5 9 - 0 1 5 0 1 3 ☒ P

**TASK 450** round surface**MICROPRISMATIC | DIRECT** CRI ≥ 90, DALI-2



SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
16.0 W	3000 K	1750 lm	109 lm/W	0 5 9 - 0 1 4 1 0 3 ☒ P
	4000 K	1860 lm	116 lm/W	0 5 9 - 0 1 4 1 1 3 ☒ P
22.8 W	3000 K	2400 lm	105 lm/W	0 5 9 - 0 1 5 1 0 3 ☒ P
	4000 K	2560 lm	112 lm/W	0 5 9 - 0 1 5 1 1 3 ☒ P

**TASK 600** round surface**MICROPRISMATIC | DIRECT** CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.6 W	3000 K	3470 lm	117 lm/W	0 5 9 - 0 1 4 2 0 3 ☒ P
	4000 K	3690 lm	125 lm/W	0 5 9 - 0 1 4 2 1 3 ☒ P
39.0 W	3000 K	4350 lm	112 lm/W	0 5 9 - 0 1 5 2 0 3 ☒ P
	4000 K	4630 lm	119 lm/W	0 5 9 - 0 1 5 2 1 3 ☒ P

**Order options**

COLOUR	
pure white RAL 9010	☒ 7
jet black RAL 9005	☒ 8
special colours	☒ X





TASK 900 round surface



MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
51.0 W	3000 K	6630 lm	130 lm/W	0 5 9 - 0 1 4 3 0 3 ☒ K
	4000 K	7060 lm	138 lm/W	0 5 9 - 0 1 4 3 1 3 ☒ K

Planning Information



TASK 600 round surface
30W, 4000K, direct

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8

CALCULATION SURFACE

Surface dimensions	1.6 × 0.8m
Surface height	0.75m
Average illuminance (E _m)	> 500 lx
Uniformity (U ₀)	> 0.6

GLARE EVALUATION

Table Classification X=4H Y=8H S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19
≥ 65° ≤ 3000 cd/m²	

Order options

COLOUR	☒
pure white RAL 9010	7
jet black RAL 9005	8
special colours	X