


**Quickinfo**

4000 K  
 CRI ≥ 90 / 3 SDCM (initial MacAdam)  
 UGR ≤ 19  
 hasta ↓ 22,100 lm / ↑ 11,500 lm  
 hasta 120 lm/W  
 L90 / 50000 h  
 DALI-2  
 Microprismatic  
 IP20

**Types**

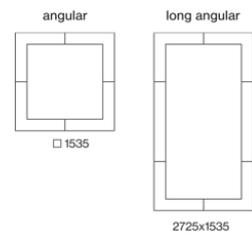

**Color**



**Distribución luminosa**



**TASK angular**

suspended

**EN** Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; Luminaire housing made of aluminium with rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, toolless height adjustment; convenient quick mounting system without tools; incl. feeder cable; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect light luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; optional acoustic elements available


**ES** Luminaria pendular rectangular, compuesta por elementos individuales en forma de L o bien rectangulares; Cuerpo de luminaria de aluminio con cantos redondeados; perfil extra plano (sólo 15 mm); superficie con recubrimiento de pintura en polvo; suspensión cable altura regulable sin herram.; sistema de montaje rápido sin herramientas; incl. cable de alimentación; distribución de luz directa a través de cuerpo LGP (Light Guiding Prism); la luz acoplada lateralmente se orienta hacia abajo por medio de un grabado por láser; proporción indirecta con pletinas propias para un flujo luminoso aumentado y una iluminación máxima del techo; iluminación homogénea; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; baldaquino para cableado pasante; opcional elementos acústicos disponible




DiiA® standards  
 251, 252, 253




clicksystem



microprismatic  
 UGR ≤ 19





CRI ≥ 98  
 XPECTRUM  
 (optional)

**TASK** angular suspended



DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
197.0 W	4000 K	↓15500/↑8050 lm	120 lm/W	0 5 9 - 5 2 8 3 1 3 <input checked="" type="checkbox"/> K

**TASK** long angular suspended

DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
282.0 W	4000 K	↓22100/↑11500 lm	119 lm/W	0 5 9 - 5 2 8 4 1 3 <input checked="" type="checkbox"/> K

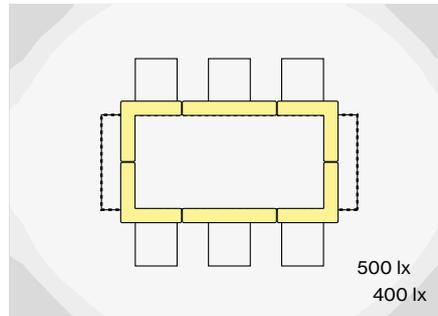**Planning Information****TASK** long angular, 280W, 4000K, direct/indirect power**ROOM VALUES**

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7   0.5   0.2
Maintenance factor	0.8
Suspension height	2.25 m

**CALCULATION SURFACE** .....

Surface dimensions	3.2 × 1.2 m
Surface height	0.75 m
Average illuminance (E <sub>m</sub> )	> 500 lx
Uniformity (U <sub>0</sub> )	> 0.6

**GLARE EVALUATION**

Table Classification X=4H   Y=8H   S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19

**Order options**

COLOUR	<input checked="" type="checkbox"/>
pure white RAL 9010	7
jet black RAL 9005	8

# Community Windpower, Frodsham

Reino Unido


**Fotografía**  
Paul Karalius




## Productos utilizados



**TASK round  
suspended**



**TASK angular  
suspended**



**TASK circle  
suspended**

