
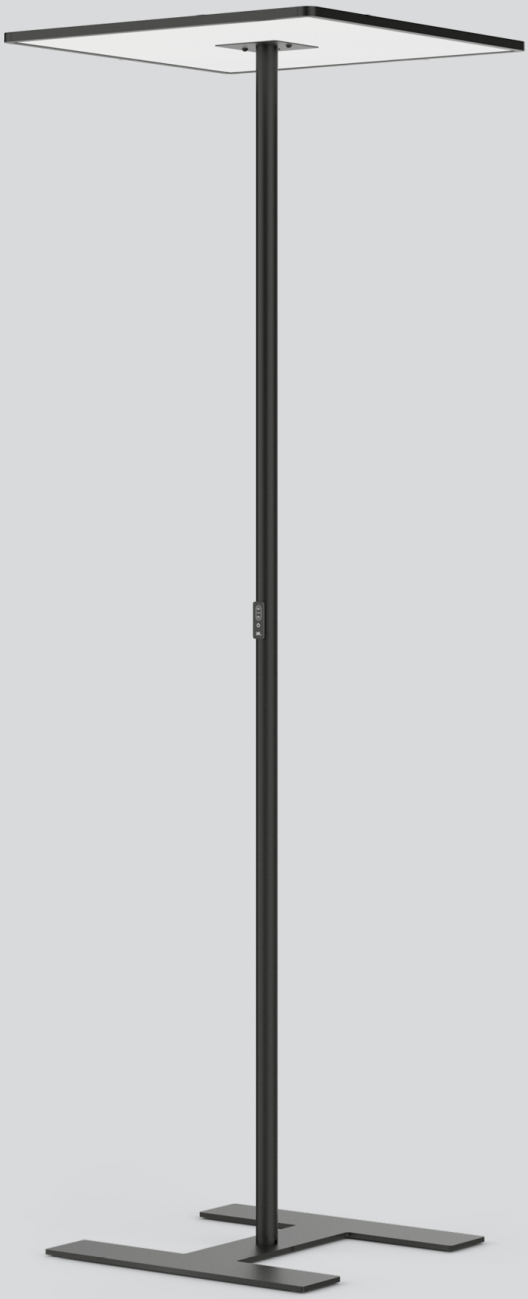


Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 10
hasta ↓ 2.420 lm / ↑ 10.700 lm
hasta 143 lm/W
L90 / 50000 h
sensor ESSENTIAL independiente, touch DIM en el poste
Microprismatic
IP20

Types



Colours



Distribución luminosa



TASK square

free standing

EN Free standing luminaire with square luminaire head made of aluminium and rounded edges; ultra low-profile design (only 15 mm); steel round downpipe; pedestal with recess for table base; surface powder coated; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug


ES Luminaria de pie con cabezal de luminaria cuadrado de aluminio y cantos redondeados; perfil extra plano (sólo 15 mm); Tubo de acero; pedestal para integrarse como base de mesa; superficie con recubrimiento de pintura en polvo; distribución de luz directa a través de cuerpo LGP (Light Guiding Prism); la luz acoplada lateralmente se orienta hacia abajo por medio de un grabado por láser; proporción indirecta con pletinas propias para un flujo luminoso aumentado y una iluminación máxima del techo; iluminación homogénea; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; interruptor montado en el tubo; incluye 3 metros de cable de conexión



suitable for fourfold workstation



lighting control by touch DIM on pole



CRI ≥ 98 XPECTRUM (optional)




TASK square free standing


CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤ 1500 | 220-240 V | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
92.0 W	3000 K	↧2280/↥10000 lm	133 lm/W	059-293201 Z
	4000 K	↧2420/↥10700 lm	143 lm/W	059-293211 Z



Planning Information

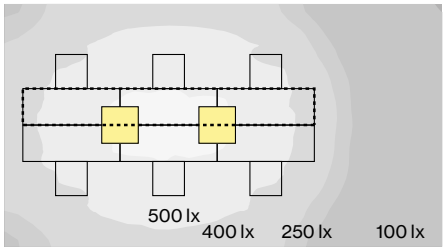



TASK square free standing
92 W, 4000 K, direct / indirect power

ROOM VALUES

Room dimensions	7.2 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8

CALCULATION SURFACE

Surface dimensions	4.8 × 0.6 m
Surface height	0.75 m
Average illuminance (E_m)	> 500 lx

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19
65° ≤ 3000 cd/m²	

Order options

CONTROL	
touch DIM on pole	5
stand alone ESSENTIAL sensor	7

COLOUR	
white aluminium RAL 9006	6
pure white RAL 9010	7
jet black RAL 9005	8
special colours	X

Office MyHammer

Alemania

Arquitecto
designfunktion
Gesellschaft für
moderne Einrichtung
Berlin mbH

Fotografía
Werner Huthmacher



Productos utilizados



TASK square free standing

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



