
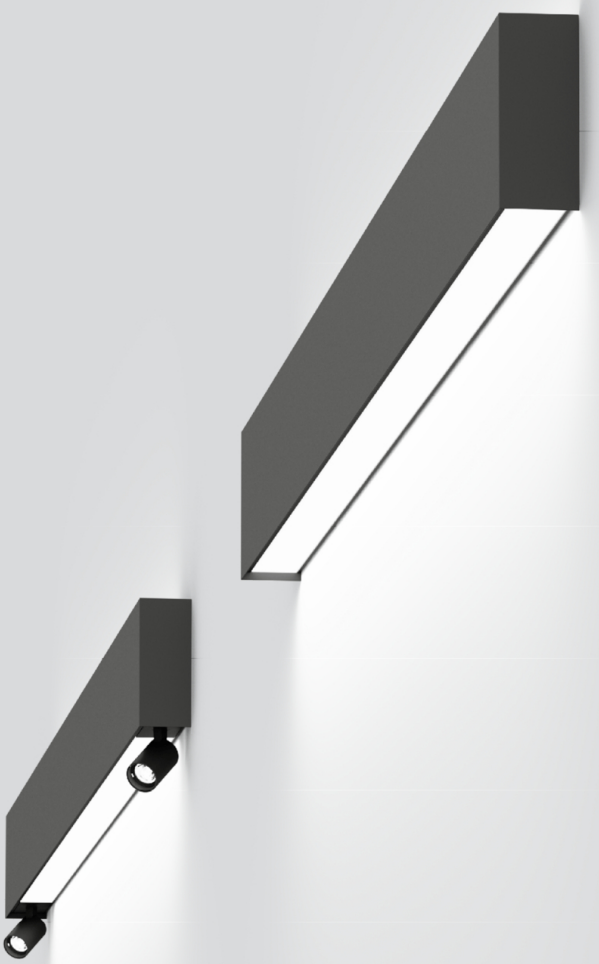


Quickinfo

3000 K, 4000 K, tunable white
2700 - 5000 K
CRI ≥ 90, CRI ≥ 97 / 3 SDCM (initial MacAdam)
hasta ↓ 4.020 lm / ↑ 4.780 lm
hasta 125 lm/W
L85 / 50000 h, L90 / 100000 h, L95 / 50000 h
DALI-2, DALI-2 / Interruptor DIM, non DIM / Interruptor ON|OFF, non atenuable
Opal, Opal / Asymmetric
IP20

Types



Colours

Distribución luminosa


LINEA

EN Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; opal cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed; optionally with switch for the JUST 26 spotlight modules

ES Cuerpo de lámpara y cubierta frontal de perfil extrusionado de aluminio, versión poligonal; sin tornillos visibles; superficie con recubrimiento de pintura en polvo; apropiada para montaje pared; iluminación homogénea de la pared o bien del techo mediante distribución uniforme directa/indirecta de la luz; cubierta opal para iluminación homogénea; o con lente asimétrica de cálculo especial para intensidades luminosas homogéneas (montaje para la iluminación del suelo o del techo); LEDS de alta eficiencia que proporcionan una alta reproducción cromática; compatible con inserto de foco JUST 26; opcionalmente con interruptor para insertos de foco JUST 26




system solution



CRI ≥ 98
XPECTRUM
(optional)



LINEA wall



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	310 mm	3000 K	↧428/↥509 lm	105 lm/W	058-617150 AA
		4000 K	↧472/↥562 lm	116 lm/W	058-617160 AA
17.6 W	610 mm	3000 K	↧881/↥1050 lm	110 lm/W	058-617250 AA
		4000 K	↧972/↥1160 lm	121 lm/W	058-617260 AA
20.1 W	610 mm	tunable w.	↧1000/↥1190 lm	109 lm/W	058-6172D3 AA
34.0 W	1210 mm	3000 K	↧1760/↥2090 lm	113 lm/W	058-617450 AA
		4000 K	↧1940/↥2310 lm	125 lm/W	058-617460 AA
37.0 W	1210 mm	tunable w.	↧2010/↥2390 lm	119 lm/W	058-6174D3 AA
68.0 W	2410 mm	3000 K	↧3520/↥4190 lm	113 lm/W	058-617850 AA
		4000 K	↧3890/↥4620 lm	125 lm/W	058-617860 AA
71.0 W	2410 mm	tunable w.	↧4020/↥4780 lm	124 lm/W	058-6178D3 AA

OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	310 mm	3000 K	↧428/↥428 lm	96 lm/W	058-617150 AH
		4000 K	↧472/↥472 lm	106 lm/W	058-617160 AH
17.6 W	610 mm	3000 K	↧881/↥881 lm	100 lm/W	058-617250 AH
		4000 K	↧972/↥972 lm	110 lm/W	058-617260 AH
20.1 W	610 mm	tunable w.	↧1000/↥1000 lm	100 lm/W	058-6172D3 AH
34.0 W	1210 mm	3000 K	↧1760/↥1760 lm	104 lm/W	058-617450 AH
		4000 K	↧1940/↥1940 lm	114 lm/W	058-617460 AH
37.0 W	1210 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	058-6174D3 AH
68.0 W	2410 mm	3000 K	↧3520/↥3520 lm	104 lm/W	058-617850 AH
		4000 K	↧3890/↥3890 lm	114 lm/W	058-617860 AH
71.0 W	2410 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	058-6178D3 AH

Order options


CONTROL	
non DIM	1
DALI-2	3

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8



LINEA 1 spotlight wall

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL / OPAL | 1 SPOTLIGHT 23°-30°, CRI ≥ 90


SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.6 W	710 mm	3000 K	↧873/↥873 lm	99 lm/W	0 5 8 - 6 1 7 2 5 ↕1 ◪ ⊼ H
		4000 K	↧963/↥963 lm	109 lm/W	0 5 8 - 6 1 7 2 6 ↕1 ◪ ⊼ H
20.1 W	710 mm	tunable w.	↧1000/↥1000 lm	100 lm/W	0 5 8 - 6 1 7 2 D ↕2 ◪ ⊼ H
34.0 W	1310 mm	3000 K	↧1760/↥1720 lm	102 lm/W	0 5 8 - 6 1 7 4 5 ↕1 ◪ ⊼ H
		4000 K	↧1940/↥1900 lm	113 lm/W	0 5 8 - 6 1 7 4 6 ↕1 ◪ ⊼ H
37.0 W	1310 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	0 5 8 - 6 1 7 4 D ↕2 ◪ ⊼ H
68.0 W	2510 mm	3000 K	↧3490/↥3490 lm	103 lm/W	0 5 8 - 6 1 7 8 5 ↕1 ◪ ⊼ H
		4000 K	↧3850/↥3850 lm	113 lm/W	0 5 8 - 6 1 7 8 6 ↕1 ◪ ⊼ H
71.0 W	2510 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	0 5 8 - 6 1 7 8 D ↕2 ◪ ⊼ H

spotlight 1 x 2,6 W / 159 lm only with 3000 K; ON|OFF switch or DIM switch only controls the spotlight



LINEA 2 spotlights wall

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL / OPAL | 2 SPOTLIGHTS 23°-30°, CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	1410 mm	3000 K	↧1760/↥1720 lm	102 lm/W	0 5 8 - 6 1 7 4 5 ↕1 ◪ D H
		4000 K	↧1940/↥1900 lm	113 lm/W	0 5 8 - 6 1 7 4 6 ↕1 ◪ D H
37.0 W	1410 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	0 5 8 - 6 1 7 4 D ↕2 ◪ D H
68.0 W	2610 mm	3000 K	↧3490/↥3490 lm	103 lm/W	0 5 8 - 6 1 7 8 5 ↕1 ◪ D H
		4000 K	↧3850/↥3850 lm	113 lm/W	0 5 8 - 6 1 7 8 6 ↕1 ◪ D H
71.0 W	2610 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	0 5 8 - 6 1 7 8 D ↕2 ◪ D H

spotlights 2 x 2,6 W / 159 lm only with 3000K; ON|OFF switch or DIM switch only controls the spotlights

Order options

CONTROL ↕1		CONTROL ↕2		COLOUR ◪		MOUNTING ⊼	
non DIM / ON|OFF switch	2	DALI-2	3	pure white RAL 9010	7	spotlight left	B
DALI-2	3	DALI-2 / DIM switch	4	jet black RAL 9005	8	spotlight right	C
DALI-2 / DIM switch	4						


SNS Headquarters, Moscow

Rusia

Arquitecto
Fedor Raschevsky, Peter Kholkovsky

Lighting Design
Sergey Ananiev


Fotografía
Light&Design

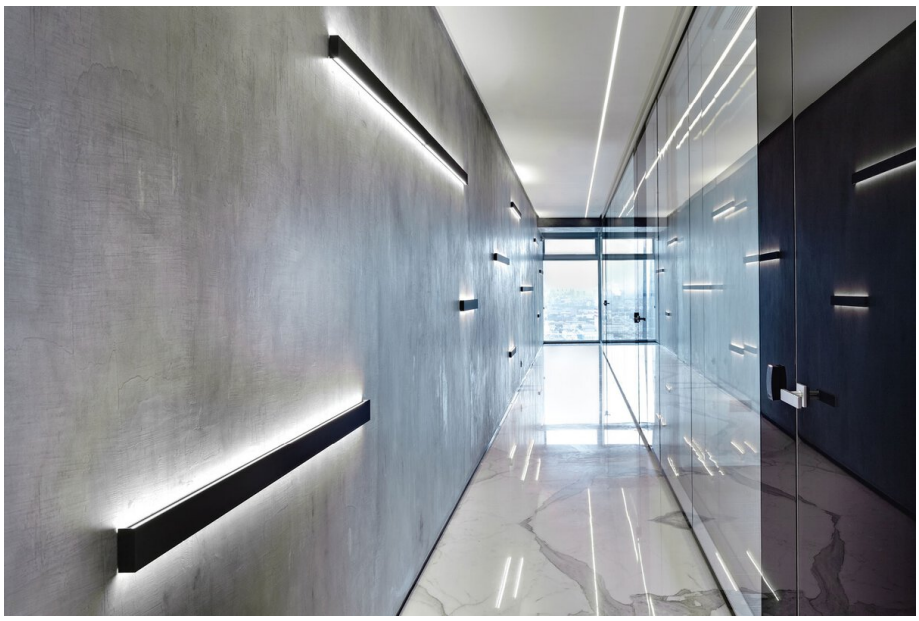

Productos utilizados



LINEA



MINIMAL 100 trimless system



LINEA system

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com




SNS
ГРУППА КОМПАНИЙ
SNS