


Quickinfo

3000 K, 4000 K
CRI ≥ 95 / 2 SDCM (initial MacAdam)
hasta 17 lm/W
L85 / 50000 h
DALI-2, DIM POTI
IP20

Types



Colours



PABLO shutter / iris / gobo

EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter in spotlight housing; COB (Chip on Board) technology - maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; contour spotlight for precise rectangular or round shape; easy adjustment by 4 shading elements or by iris-shaped shade made of stainless steel; incl. high quality bi-convex glass lens; sharp object focusing through adjustable lens; focus using rubber adjustment ring on spotlight head; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, available as an accessory

ES Proyector de carril electrificado de fundición de aluminio inyectado; superficie con recubrimiento de pintura en polvo; giratorio 360° y orientable 310°; convertidor en carcasa de proyector; Chip on Board - máxima eficiencia; no sombras múltiples; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; proyector de contorno para conseguir una forma rectangular o redonda exacta; ajuste sencillo con 4 elementos de ensombrecimiento o con ensombrecedor en forma de iris de acero inoxidable; incluida lente biconvexa de alta calidad; enfoque nítido del objeto a través de una optica ajustable; enfoque realizado manualmente mediante una pieza ubicada en el cabezal proyector; adaptador para instalación sin herramientas o desplazamiento en diferentes carriles electrificados de 3 fases; fijación de adaptador sin herramienta con tornillo moleteado o tornillo de sujeción (destornillador necesario); base para techo, opcionalmente en carcasa superpuesta o carcasa empotrada, disponible como accesorio



compatible with MOVE IT PRO 45



DiiA® standards 251, 252, 253



360° rotatable, 310° tiltable



shutter / iris / gobo




DIM POTI / rotation lock



PABLO shutter track

31°, CRI ≥ 95

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.0 W	3000 K	201 lm	14 lm/W	180-530 00
	4000 K	220 lm	16 lm/W	180-530 01
23.0 W	3000 K	298 lm	13 lm/W	180-530 10
	4000 K	327 lm	14 lm/W	180-530 11






PABLO iris track


32°, CRI ≥ 95

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.0 W	3000 K	210 lm	15 lm/W	180-540 00
	4000 K	231 lm	17 lm/W	180-540 01
23.0 W	3000 K	312 lm	14 lm/W	180-540 10
	4000 K	343 lm	15 lm/W	180-540 11




Planning Information

PABLO shutter

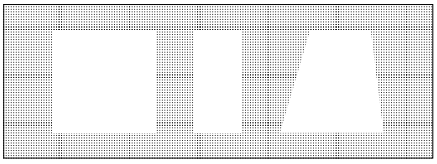


possible shapes of illumination

PABLO iris

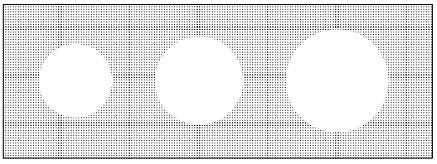

possible shapes of illumination

Illumination size



A (mm)	H (mm)	ø (mm)
1000	396	560
2000	792	1120
3000	1188	1680

Order options

MOUNTING		CONTROL		COLOUR	
set screw (tool required)	1	DALI-2	3	traffic white RAL 9016	7
tool-free fixation	2	DIM POTI	8	jet black RAL 9005	8

Mounting accessories

RECESSED HOUSING / POINT OUTLET ceiling thickness, 1-30 mm

Ø·H (mm)	ORDER CODE
151·60	186-07227

SURFACE HOUSING / POINT OUTLET

Ø·H (mm)	ORDER CODE
120·32	186-07228

Order options

COLOUR	
traffic white RAL 9016	7
jet black RAL 9005	8