


Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
UGR ≤ 16
hasta ↓ 3.970 lm / ↑ 3.950 lm
hasta 5.520 lm/m
hasta 127 lm/W
L90 / 50000 h
Difusor: Microprismatic
DALI-2
IP20

Types

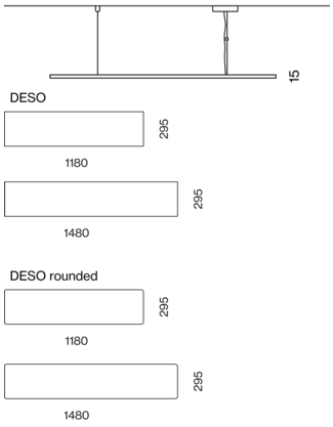

Colours

Distribución luminosa

DESO

suspended

EN Rectangular luminaire housing in aluminium; choice of angular design or with rounded edges; ultra low-profile design (only 15 mm); surface powder coated; pendant fitting with cable suspension; with integrated toolless suspension height adjustment; incl. feed (white); electronic operating unit installed in the canopy; direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed up and down by laser engraving; direct component: microprismatic PMMA cover; indirect component covered with opal cover; homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring


ES Cuerpo de lámpara rectangular de aluminio; disponible en versión angulosa o de bordes redondeados; perfil extra plano (sólo 15 mm); superficie con recubrimiento de pintura en polvo; suspendido con cable; regulación de la altura sin necesitar herramientas; incl. cable de alimentación (blanco); driver instalado en el baldaquino; distribución de luz directa/indirecta que direcciona la luz en el interior de la luminaria mediante LGP (Light Guiding Prism); luz acoplada lateralmente mediante grabado láser orientada hacia arriba y hacia abajo; La distribución directa cuenta con un difusor microprismático de alta calidad; la distribución indirecta cuenta con un difusor opal; iluminación homogénea; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; baldaquino para cableado pasante


detail end caps


detail rounded end caps


DIN EN 12464-1
UGR ≤ 19


direct / indirect illumination




DESO suspended


CRI ≥80 | UGR ≤16 | cd/m² ≤3000 | 220-240 V | DALI 1 ADDR. | X-PERT | X-PERT

DIRECT / INDIRECT pure white, CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
38.0 W	1180 mm	3000 K	↧2330/↥2310 lm	122 lm/W	0 7 4 - 2 2 4 4 5 3 7 P
		4000 K	↧2420/↥2410 lm	127 lm/W	0 7 4 - 2 2 4 4 6 3 7 P
63.0 W	1480 mm	3000 K	↧3810/↥3800 lm	121 lm/W	0 7 4 - 2 2 4 5 5 3 7 P
		4000 K	↧3970/↥3950 lm	126 lm/W	0 7 4 - 2 2 4 5 6 3 7 P



Canopy L×W×H (mm)
L 1180 112×112×35
L 1480 140×140×43




DESO rounded suspended

CRI ≥80 | UGR ≤16 | cd/m² ≤3000 | 220-240 V | DALI 1 ADDR. | X-PERT | X-PERT

DIRECT / INDIRECT pure white, CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
38.0 W	1180 mm	3000 K	↧2330/↥2310 lm	122 lm/W	0 7 4 - 3 2 4 4 5 3 7 P
		4000 K	↧2420/↥2410 lm	127 lm/W	0 7 4 - 3 2 4 4 6 3 7 P
63.0 W	1480 mm	3000 K	↧3810/↥3800 lm	121 lm/W	0 7 4 - 3 2 4 5 5 3 7 P
		4000 K	↧3970/↥3950 lm	126 lm/W	0 7 4 - 3 2 4 5 6 3 7 P




Canopy L×W×H (mm)
L 1180 112×112×35
L 1480 140×140×43

Order options

COLOUR
pure white RAL 9010

Planning Information

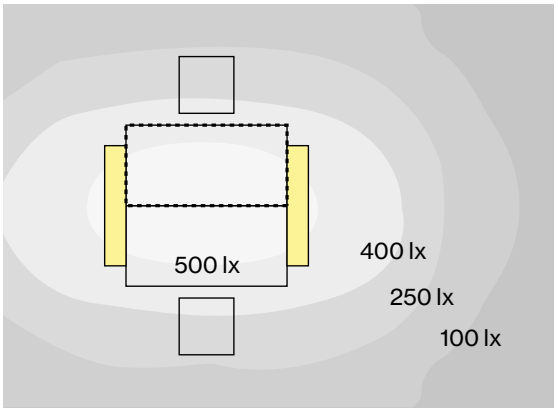



DESO suspended, 39 W, 4000 K, direct / indirect

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8
Suspension height	2.25 m

CALCULATION SURFACE

Surface dimensions	1.6 × 0.8 m
Surface height	0.75 m
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 16
UGR axial	≤ 16


≥ 65° ≤ 3000 cd/m²

Highlight Towers


Alemania

Lighting Design
Lumen3 GbR

Fotografía
Dominik Münich

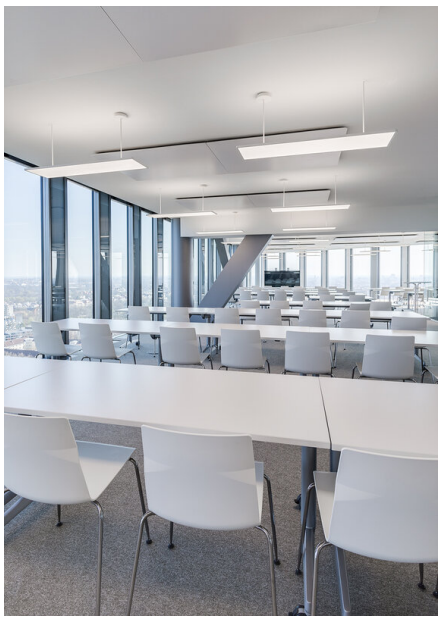

Productos utilizados



TASK suspended



DESO suspended

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



