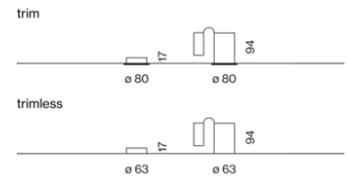




Quickinfo

6500 K
 hasta 217 lm/W
 DALI-2 ESSENTIAL sensor,
 DALI-2 SENSE sensor
 front IP20, IP40, back IP20

Types



Color



Set de montaje



SASSO 60 round sensor / emergency

EN Round inset (Emergency Light or Sensor); installation without tools in mounting set (trimless or with trim); surface lacquered; installation possible in different housings; LED emergency light inset: 3 variants with different test possibilities - Basic with test button, selftest with status LED or Pro DALI with monitoring via DALI; sensor with DALI-2 control: 2 variants - Basic with brightness and presence sensor or Pro with additional temperature, humidity, air quality and noise level measurement


ES Inserto redondo (luz emergencia/sensor); instalación sin herramientas mediante kit de montaje (con o sin marco); superficie lacada; posibilidad de instalar distintas carcasas; inserto luz de emerg. LED: 3 variantes con difer. opciones de test - Basic con botón de prueba, autotest con LED de estado o Pro DALI con superv. a través de DALI; sensor con control DALI-2: 2 variantes - Basic con sensor de luminosidad y presencia o Pro con medición adic. de temperatura, humedad y calidad del aire y nivel de ruido



quick mounting
 in soft acoustic
 ceilings



SASSO 60 round sensor essential



DALI-2 ESSENTIAL sensor

COLOUR


jet black

traffic white

ORDER CODE

0 4 8 - 2 6 9 3 1 1 1

0 4 8 - 2 6 9 3 1 1 7



SASSO 60 round sensor sense



DALI-2 SENSE sensor

COLOUR


jet black

traffic white

ORDER CODE

0 4 8 - 2 6 9 3 1 2 1

0 4 8 - 2 6 9 3 1 2 7




SASSO 60 round emergency light



3H | BASIC | SPOT LENS / ESCAPE ROUTE LENS / ANTI PANIC LENS 21°-149°x150°, CRI ≥ 80

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
1.0 W	6500 K	217 lm	217 lm/W	0 4 8 - 2 6 9 3 2 1 <input checked="" type="checkbox"/>

incl. 3 interchangeable lenses



3H | SELFTTEST | SPOT LENS / ESCAPE ROUTE LENS / ANTI PANIC LENS 21°-149°x150°, CRI ≥ 80

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
1.0 W	6500 K	217 lm	217 lm/W	0 4 8 - 2 6 9 3 2 2 <input checked="" type="checkbox"/>

incl. 3 interchangeable lenses

3H | PRO | SPOT LENS / ESCAPE ROUTE LENS / ANTI PANIC LENS 21°-149°x150°, CRI ≥ 80


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
1.0 W	6500 K	217 lm	217 lm/W	0 4 8 - 2 6 9 3 2 3 <input checked="" type="checkbox"/>

incl. 3 interchangeable lenses

Order options

COLOUR	<input checked="" type="checkbox"/>	COLOUR	
jet black RAL 9005	1	white aluminium	RAL 9006
traffic white RAL 9016	7	traffic black	RAL 9017


Mounting accessories (required)

		MOUNTING SET trimless for plasterboard ceilings		
COLOUR	PLASTERBOARD CEILING THICKNESS	Ø-H (mm)	ORDER CODE	
traffic white	12.5/15/25 mm	73-29	0 4 8 - 2 6 9 6 1 1 7	
for SASSO 60 round SPIO 60 downlight				


 60*/115** non DIM
 120 DALI-2
 145 loop through function
 * SASSO 60
 ** SPIO 60

		MOUNTING SET trimless for soft acoustic ceilings		
COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE	
traffic white	25-40 mm	80-25	0 4 8 - 2 6 9 6 1 9 7	

 74
 120 non DIM
 120 DALI-2
 145 loop through function


		MOUNTING SET with trim for soft acoustic ceilings, 25-40 mm		
COLOUR		Ø-H (mm)	ORDER CODE	
traffic white		80-27	0 4 8 - 2 6 9 6 3 9 7	
jet black		80-27	0 4 8 - 2 6 9 6 3 9 8	


 74
 100 non DIM
 100 DALI-2
 125 loop through function

		MOUNTING SET with trim 1 lamp for intermediate ceilings, 2-25 mm		
COLOUR		Ø-H (mm)	ORDER CODE	
traffic white		80-40	0 4 8 - 2 6 9 6 3 1 7	
jet black		80-40	0 4 8 - 2 6 9 6 3 1 8	


 73
 60 non DIM
 100 DALI-2
 125 loop through function

Mounting accessories (optional)

		EXPOSED CONCRETE MOUNTING HOUSING		
COLOUR		L-W-H (mm)	ORDER CODE	
white aluminium		230-230-162	0 4 8 - 2 6 9 5 2 1 0	

		PRIMED CONCRETE MOUNTING HOUSING		
L-W-H (mm)			ORDER CODE	
614-307-120			0 4 8 - 2 6 9 5 1 1 0	
order mounting set separately				

Mounting tools accessories (optional)

		MOUNTING TOOL for soft acoustic ceilings		
COLOUR		L-W-H (mm)	ORDER CODE	
traffic black		77-77-35	0 4 8 - 2 6 9 5 9 1 8	

Order options

COLOUR	<input checked="" type="checkbox"/>	COLOUR	
jet black RAL 9005	1	white aluminium	RAL 9006
traffic white RAL 9016	7	traffic black	RAL 9017



Electrical accessories (optional)

REPLACEMENT ACCUPACK

TYPE

3h battery life

ORDER CODE

0 4 8 - 2 6 9 3 9 1 0

Order options

COLOUR

jet black RAL 9005

traffic white RAL 9016



COLOUR

white aluminium

traffic black

RAL 9006

RAL 9017