

Quickinfo

3000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
hasta 39 lm/W
L80 / 50000 h
non atenuable
IP65, IK08

Types



Colours

Distribución luminosa

STREAMCUT

wall

EN Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve; ambient temperatures from -20°C to + 50°C; separate luminaire wiring compartment, suitable for through wiring

ES Lámpara empotrable de pared de aluminio en diseño sencillo, reducido; superficie anodizada y con recubrimiento de polvo gris oscuro o negro; cristal seguridad parcialmente grabado, fijado con tornillos acero inoxidable; Reflector de aluminio puro anodizado mate con característica de proyección asimétrica; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; tIPo protección IP65, con válvula compensación presión; temperatura ambiente de -20°C a +50°C; espacio de conexión de lámpara separado, apropiado para cableado pasante




STREAMCUT wall


CRI ≥ 80 | 220-240 V | IP65 | IK 08 | X-PERT | X-PERT

ASYMMETRIC CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
7.6 W	3000 K	293 lm	39 lm/W	088-283151




Planning Information

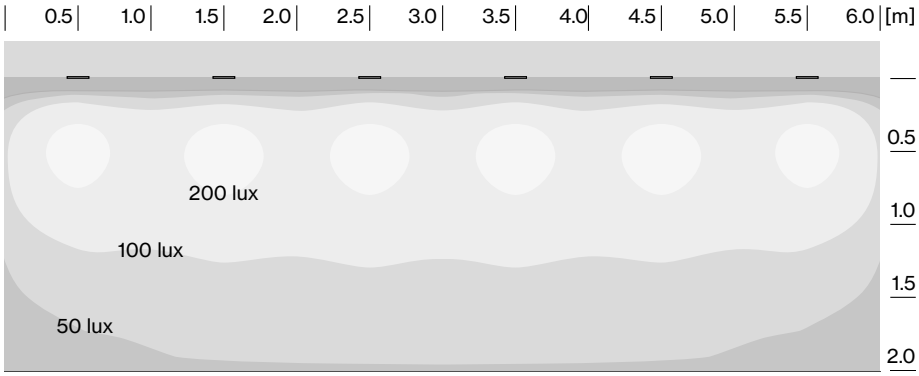

STREAMCUT wall (8.4 W, 6 luminaires)
wall mounting height from bottom: 0.8 m / distance between luminaires: 1.0 m

Mounting accessories



MOUNTING HOUSING for concrete and solid walls

L·W·H (mm)	ORDER CODE
290·100·200	088-289111 0

Order options

COLOUR	
jet black RAL 9005	8
grey aluminium RAL 9007	D