

## STREAMCUT

wall

**EN** Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve; ambient temperatures from -20°C to +50°C; separate luminaire wiring compartment, suitable for through wiring

**ES** Lámpara empotrable de pared de aluminio en diseño sencillo, reducido; superficie anodizada y con recubrimiento de polvo gris oscuro o negro; cristal seguridad parcialmente grabado, fijado con tornillos acero inoxidable; Reflector de aluminio puro anodizado mate con característica de proyección asimétrica; LEDs de alta eficiencia que proporcionan una alta reproducción cromática; tipo protección IP65, con válvula compensación presión; temperatura ambiente de -20°C a +50°C; espacio de conexión de lámpara separado, apropiado para cableado pasante

### Quickinfo

3000 K  
 CRI  $\geq$  80 / 3 SDCM (initial MacAdam)  
 hasta 39 lm/W  
 L80 / 50000 h  
 non atenuable  
 IP65, IK08

### Types



### Color



### Distribución luminosa






### STREAMCUT wall




**ASYMMETRIC** CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
7.6 W	3000 K	293 lm	39 lm/W	0 8 8 - 2 8 3 1 5 1 <input checked="" type="checkbox"/>




### Planning Information

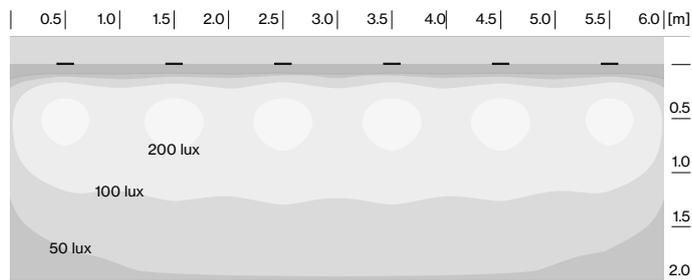

**STREAMCUT wall** (8.4 W, 6 luminaires)  
 wall mounting height from bottom: 0.8 m / distance between luminaires: 1.0 m

### Mounting accessories (optional)



**MOUNTING HOUSING** for concrete and solid walls

L·W·H (mm)  
 290-100-200

ORDER CODE  
 0 8 8 - 2 8 9 1 1 1 0

### Order options

COLOUR	<input checked="" type="checkbox"/>
grey aluminium RAL 9007	D
jet black RAL 9005	8