


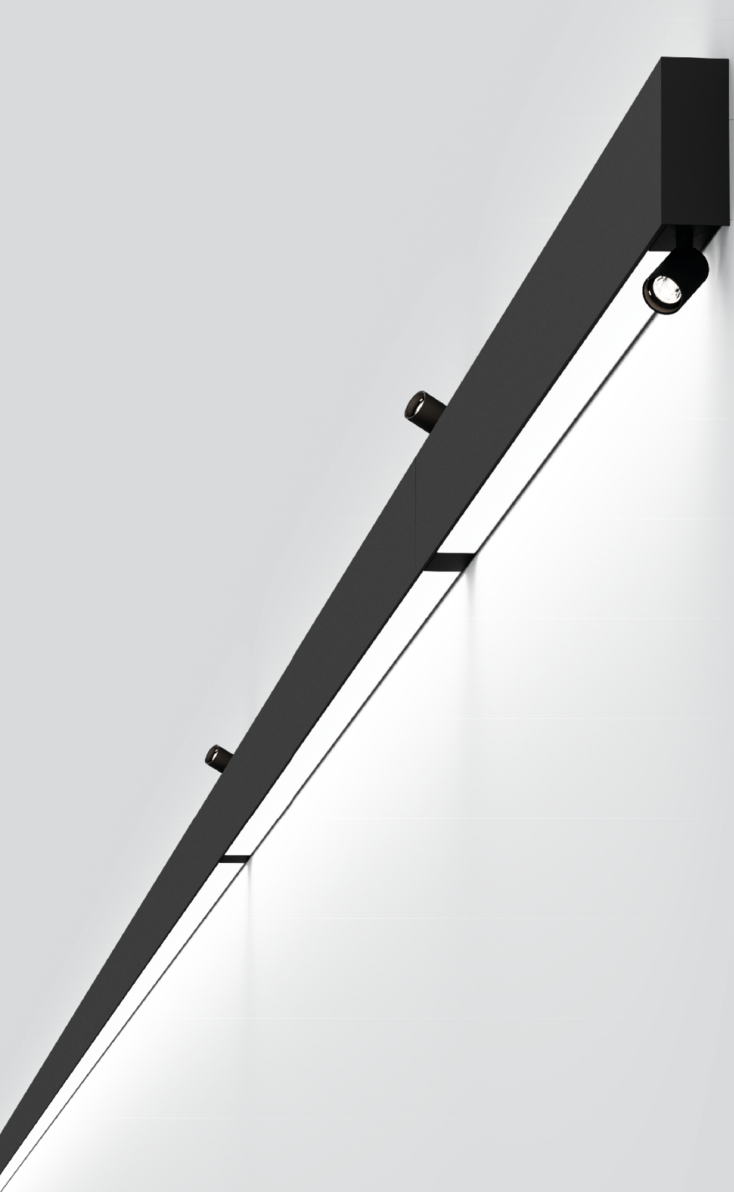

LINEA

system


EN Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; designed for continuous lighting systems, 90° angle connectors for flexible system design; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; opal cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed

ES Cuerpo de lámpara y cubierta frontal de perfil extrusionado de aluminio, versión poligonal; sin tornillos visibles; diseñado para sistemas de iluminación continuos, conectores angulares de 90° para el montaje flexible del sistema; superficie con recubrimiento de pintura en polvo; apropiada para montaje pared; iluminación homogénea de la pared o bien del techo mediante distribución uniforme directa/indirecta de la luz; cubierta opal para iluminación homogénea; o con lente asimétrica de cálculo especial para intensidades luminosas homogéneas (montaje para la iluminación del suelo o del techo); LEDs de alta eficiencia que proporcionan una alta reproducción cromática; compatible con inserto de foco JUST 26


Quickinfo

3000 K, 4000 K, tunable white
2700 - 5000 K
CRI $\geq$ 90, CRI $\geq$ 97 / 3 SDCM
(initial MacAdam)
hasta 4.020 lm / 4.770 lm
hasta 125 lm/W
L85 / 50000 h, L95 / 50000 h
DALI-2, non attenuable
Opal, Opal / Asymmetric
IP20 / CP1 / 220-240 V
306 mm, 606 mm, 633 mm, 637 mm, 706 mm, 1.206 mm, 1.306 mm, 2.406 mm, 2.506 mm,


Types



Distribución luminosa



CRI $\geq$ 98
XPECTRUM
(optional)




LINEA wall system



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	306 mm	3000 K	↓428/↑509 lm	105 lm/W	0 5 8 - 6 1 4 1 5 A A
		4000 K	↓472/↑562 lm	116 lm/W	0 5 8 - 6 1 4 1 6 A A
17.6 W	606 mm	3000 K	↓881/↑1050 lm	110 lm/W	0 5 8 - 6 1 4 2 5 A A
		4000 K	↓972/↑1160 lm	121 lm/W	0 5 8 - 6 1 4 2 6 A A
34.0 W	1206 mm	3000 K	↓1760/↑2090 lm	113 lm/W	0 5 8 - 6 1 4 4 5 A A
		4000 K	↓1940/↑2310 lm	125 lm/W	0 5 8 - 6 1 4 4 6 A A
39.0 W	1206 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/↑2390 lm	113 lm/W	0 5 8 - 6 1 4 4 D 3 A A
68.0 W	2406 mm	3000 K	↓3520/↑4190 lm	113 lm/W	0 5 8 - 6 1 4 8 5 A A
		4000 K	↓3890/↑4620 lm	125 lm/W	0 5 8 - 6 1 4 8 6 A A
76.0 W	2406 mm	↓ tunable w./ ↑2700 K - 5000 K	↓4020/↑4770 lm	116 lm/W	0 5 8 - 6 1 4 8 D 3 A A



OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	306 mm	3000 K	↓428/↑428 lm	96 lm/W	0 5 8 - 6 1 4 1 5 A H
		4000 K	↓472/↑472 lm	106 lm/W	0 5 8 - 6 1 4 1 6 A H
17.6 W	606 mm	3000 K	↓881/↑881 lm	100 lm/W	0 5 8 - 6 1 4 2 5 A H
		4000 K	↓972/↑972 lm	110 lm/W	0 5 8 - 6 1 4 2 6 A H
34.0 W	1206 mm	3000 K	↓1760/↑1760 lm	104 lm/W	0 5 8 - 6 1 4 4 5 A H
		4000 K	↓1940/↑1940 lm	114 lm/W	0 5 8 - 6 1 4 4 6 A H
39.0 W	1206 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/↑2010 lm	103 lm/W	0 5 8 - 6 1 4 4 D 3 A H
68.0 W	2406 mm	3000 K	↓3520/↑3520 lm	104 lm/W	0 5 8 - 6 1 4 8 5 A H
		4000 K	↓3890/↑3890 lm	114 lm/W	0 5 8 - 6 1 4 8 6 A H
76.0 W	2406 mm	↓ tunable w./ ↑2700 K - 5000 K	↓4020/↑4020 lm	106 lm/W	0 5 8 - 6 1 4 8 D 3 A H




LINEA inner corner wall system



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	633 mm	3000 K	↓1760/↑2090 lm	113 lm/W	0 5 8 - 6 1 1 1 5 A A
		4000 K	↓1940/↑2310 lm	125 lm/W	0 5 8 - 6 1 1 1 6 A A
39.0 W	633 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/↑2390 lm	113 lm/W	0 5 8 - 6 1 1 1 D 3 A A



OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	633 mm	3000 K	↓1760/↑1760 lm	104 lm/W	0 5 8 - 6 1 1 1 5 A H
		4000 K	↓1940/↑1940 lm	114 lm/W	0 5 8 - 6 1 1 1 6 A H
39.0 W	633 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/↑2010 lm	103 lm/W	0 5 8 - 6 1 1 1 D 3 A H

Order options

CONTROL		COLOUR		MOUNTING	
non DIM	1	pure white RAL 9010	7	spotlight left	B
DALI-2	3	jet black RAL 9005	8	spotlight right	C




LINEA outer corner wall system



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	637 mm	3000 K	↓1760/↑2090 lm	113 lm/W	0 5 8 - 6 1 1 2 5 A A
		4000 K	↓1940/↑2310 lm	125 lm/W	0 5 8 - 6 1 1 2 6 A A
39.0 W	637 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/↑2390 lm	113 lm/W	0 5 8 - 6 1 1 2 D 3 A A



OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	637 mm	3000 K	↓1760/↑1760 lm	104 lm/W	0 5 8 - 6 1 1 2 5 A H
		4000 K	↓1940/↑1940 lm	114 lm/W	0 5 8 - 6 1 1 2 6 A H
39.0 W	637 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/↑2010 lm	103 lm/W	0 5 8 - 6 1 1 2 D 3 A H




LINEA 1 spotlight wall system



OPAL / OPAL | 1 SPOTLIGHT 30°, CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.6 W	706 mm	3000 K	↓881/↑881 lm	100 lm/W	0 5 8 - 6 1 4 2 5 H
		4000 K	↓972/↑972 lm	110 lm/W	0 5 8 - 6 1 4 2 6 H
34.0 W	1306 mm	3000 K	↓1760/↑1760 lm	104 lm/W	0 5 8 - 6 1 4 4 5 H
		4000 K	↓1940/↑1940 lm	114 lm/W	0 5 8 - 6 1 4 4 6 H
39.0 W	1306 mm	↓ tunable w./ ↑2700 K - 5000 K	↓2010/↑2010 lm	103 lm/W	0 5 8 - 6 1 4 4 D 3 H
68.0 W	2506 mm	3000 K	↓3520/↑3520 lm	104 lm/W	0 5 8 - 6 1 4 8 5 H
		4000 K	↓3890/↑3890 lm	114 lm/W	0 5 8 - 6 1 4 8 6 H
76.0 W	2506 mm	↓ tunable w./ ↑2700 K - 5000 K	↓4020/↑4020 lm	106 lm/W	0 5 8 - 6 1 4 8 D 3 H



spotlight 1 x 2,6 W / 159 lm only with 3000 K

Mounting accessories (optional)



END CAPS 1 pair

L-W-H (mm)

40-100-12

ORDER CODE

0 5 0 - 2 5 4 0 1 0



LINEAR CONNECTOR

TYPE

1 piece

10 pieces

L-W (mm)

60-38

60-38

ORDER CODE

0 5 0 - 2 5 5 1 1 0 0

0 5 0 - 2 5 5 1 1 0 0 · 1 0

Order options

CONTROL

non DIM

DALI-2

1

3

COLOUR

pure white RAL 9010

jet black RAL 9005

7

8

MOUNTING

spotlight left

spotlight right

B

C

Electrical accessories (optional)

THROUGH WIRE			ORDER CODE
TYPE			
3×1.5 mm² 10 pieces non DIM			0 0 4 - 9 0 0 0 3
5×1.5 mm² 10 pieces DALI-2			0 0 4 - 9 0 0 0 5

Order options

CONTROL		COLOUR		MOUNTING	
non DIM	1	pure white RAL 9010	7	spotlight left	B
DALI-2	3	jet black RAL 9005	8	spotlight right	C