


Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
hasta 48 lm/W
L80 / 50000 h, L90 / 50000 h
DALI-2, non atenuable
IP20

Types

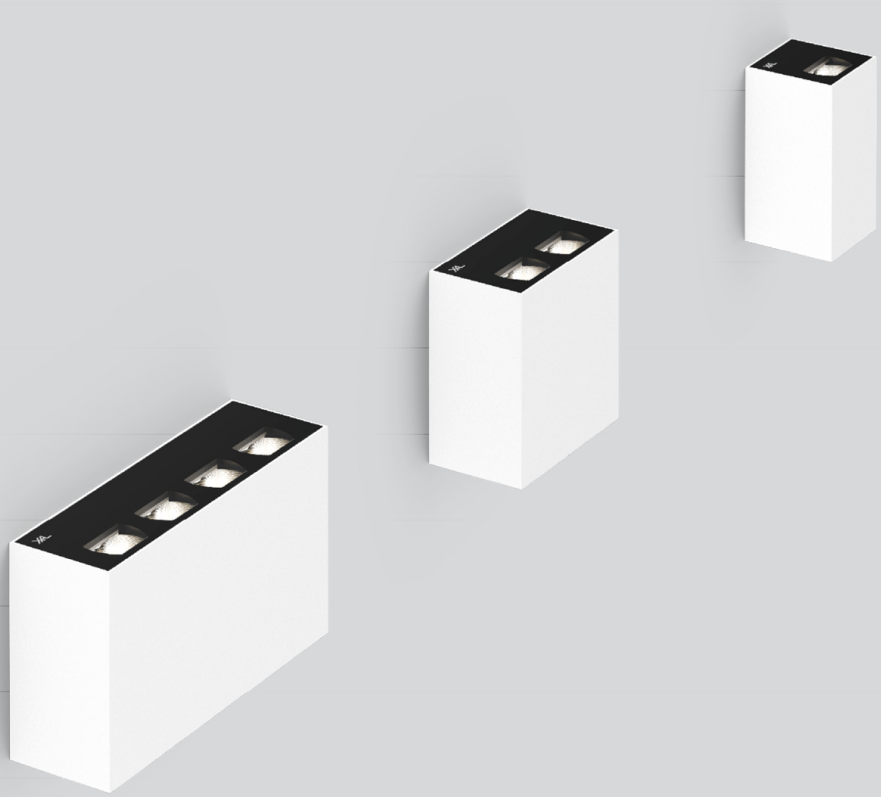

Colours

Distribución luminosa

UNICO wall

surface

EN Rectangular wall surface mounted multi-uplight made of aluminium; equipped with one light inset (1 LAMP) / two (2 LAMPS) / four (4 LAMPS) light insets; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminum-vaporised surface; homogeneous wall or ceiling illumination through uniform light distribution; energy-efficient high power LEDs with very good colour rendering; luminaire for through wiring


ES Uplight múltiple rectang. alum. para montaje superf.; equipado con un inserto luminoso (1 LAMP) / dos (2 LAMPS) / cuatro (4 LAMPS) insertos lumin.; cuerpo luminoso insertable en la placa de montaje por enclavamiento y sin necesidad de herramienta; convertidor integrado en el cuerpo luminoso; superficie con recubrimiento de pintura en polvo; reflector de alta calidad con superficie de múltiples facetas revestida con aluminio por vaporización; iluminación homogénea de la pared o bien del techo mediante distribución uniforme de la luz; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; luminaria para cableado pasante



homogeneous ceiling illumination



saftey glass for dust protection




UNICO wall 1 lamp surface




WIDE FLOOR CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
5.8 W	2700 K	220 lm	38 lm/W	0 9 0 - 0 L 1 4 1 T ◪ 0 0 1
	3000 K	235 lm	41 lm/W	0 9 0 - 0 L 1 5 1 T ◪ 0 0 1
	4000 K	244 lm	42 lm/W	0 9 0 - 0 L 1 6 1 T ◪ 0 0 1






UNICO wall 2 lamps surface




WIDE FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.3 W	2700 K	650 lm	38 lm/W	0 9 0 - 0 L 2 4 ◆ T ◪ 0 0 1
	3000 K	693 lm	40 lm/W	0 9 0 - 0 L 2 5 ◆ T ◪ 0 0 1
	4000 K	744 lm	43 lm/W	0 9 0 - 0 L 2 6 ◆ T ◪ 0 0 1






UNICO wall 4 lamps surface



WIDE FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.1 W	2700 K	1230 lm	42 lm/W	0 9 0 - 0 L 4 4 ◆ T ◪ 0 0 1
	3000 K	1310 lm	45 lm/W	0 9 0 - 0 L 4 5 ◆ T ◪ 0 0 1
	4000 K	1410 lm	48 lm/W	0 9 0 - 0 L 4 6 ◆ T ◪ 0 0 1



Order options

CONTROL ◆	
non DIM	1
DALI-2	3

COLOUR ◪	
jet black RAL 9005	B
white aluminium RAL 9006	G
traffic white RAL 9016	W