

UNICO wall

recessed


EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering

ES Lámpara de pared empotr. aluminio; instalación sin herramientas mediante kit de montaje (con o sin marco) con sistema inserción de bola; posibilidad de instalar distintas carcasas; superficie con recubrimiento de pintura en polvo; con convertidor externo; reflector de alta calidad con superficie de múltiples facetas revestida con aluminio por vaporización; diferentes distribuciones de luz asimétrica; montaje para iluminación de suelo o de techo; LEDs de alta eficiencia que proporcionan una alta reproducción cromática

Quickinfo

2700 K, 3000 K, 4000 K
 CRI ≥ 90 / 3 SDCM (initial MacAdam)
 hasta 62 lm/W
 L80 / 50000 h, L90 / 50000 h
 DALI-2, non attenuable
 IP20

Types



Color



Set de montaje




Distribución luminosa




homogeneous floor illumination



safety glass for dust protection




UNICO wall 1 lamp recessed



WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.0 W	2700 K	492 lm	55 lm/W	0 9 0 - 6 L 1 4 ⇄ UB 0 0 1
	3000 K	524 lm	58 lm/W	0 9 0 - 6 L 1 5 ⇄ UB 0 0 1
	4000 K	562 lm	62 lm/W	0 9 0 - 6 L 1 6 ⇄ UB 0 0 1




UNICO wall 2 lamps recessed




WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.3 W	2700 K	934 lm	54 lm/W	0 9 0 - 6 L 2 4 ⇄ UB 0 0 1
	3000 K	995 lm	58 lm/W	0 9 0 - 6 L 2 5 ⇄ UB 0 0 1
	4000 K	1070 lm	62 lm/W	0 9 0 - 6 L 2 6 ⇄ UB 0 0 1




Planning Information

wide floor

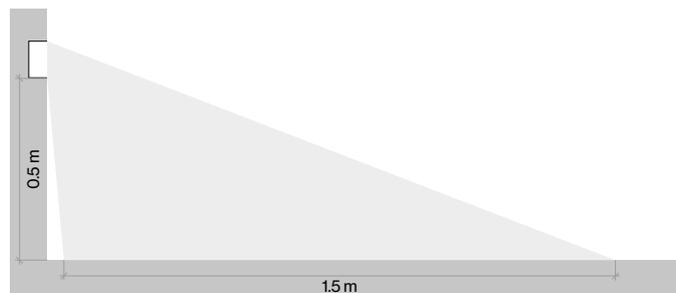

Mounting accessories (required)




MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L-W-H (mm)	ORDER CODE
12.5/15/20/25 mm	85-47-47	0 9 0 - 7 L 2 0 1 0 0

for UNICO L2 and UNICO wall recessed 1 lamp

Order options

CONTROL	⇄	COLOUR	
non DIM	1	jet black	RAL 9005
DALI-2	3	traffic white	RAL 9016



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L-W-H (mm)	ORDER CODE
12.5/15/20/25 mm	85-85-47	0 9 0 - 7 Q 4 0 1 0 0

for UNICO Q4 | UNICO wall recessed 2 lamps



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L-W-H (mm)	ORDER CODE
jet black	101-63-30	0 9 0 - 7 L 2 0 2 0 B
traffic white	101-63-30	0 9 0 - 7 L 2 0 2 0 W

for UNICO L2 and UNICO wall recessed 1 lamp




MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L-W-H (mm)	ORDER CODE
jet black	101-101-30	0 9 0 - 7 Q 4 0 2 0 B
traffic white	101-101-30	0 9 0 - 7 Q 4 0 2 0 W

for UNICO Q4 | UNICO wall recessed 2 lamps

Mounting accessories (optional)



PRIMED CONCRETE MOUNTING HOUSING

L-W-H (mm)	ORDER CODE
240-400-130	0 5 2 - 1 9 1 4 3 2 0

order mounting set separately

Order options

CONTROL		COLOUR	
non DIM	1	jet black	RAL 9005
DALI-2	3	traffic white	RAL 9016