
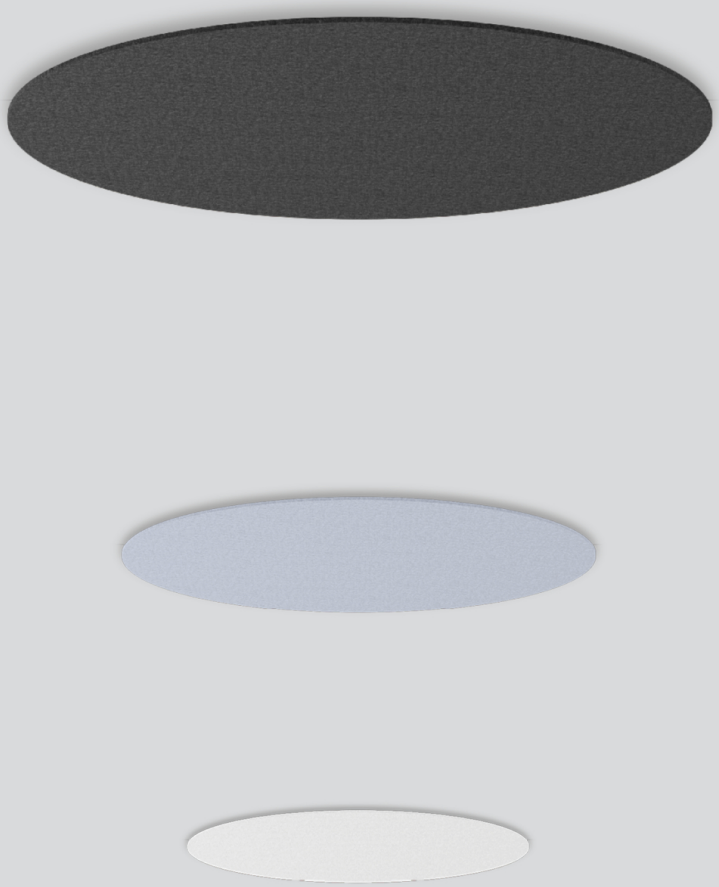


Quickinfo

fieltro PET compuesto de al menos un 50% de material reciclado post-consumer
hasta clase de absorbente A
versión ignífuga disponible

Types



Colours



MINO CIRCLE acoustic


ceiling / suspended


EN Acoustic element made of high quality, self-supporting, at least 75 % recycled PET felt with sound absorbing properties; round design; high quality visual and tactile surface; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; choice of surface mounted and pendant versions with cable suspension; toolless suspension height adjustment of the acoustic element


ES Elemento acústico de fieltro PET al menos un 75 % reciclado y autoportante de calidad superior con propiedades de absorción del sonido; forma redonda; superficie de gran calidad óptica y táctil; absorción del sonido directo y del reflejado por el techo; con ello gran rendimiento acústico; opcionalmente como variante superpuesta o colgada con cable; ajuste de altura sin herramientas en elemento acústico




made of at least 75% post-consumer recycled PET felt









MINO CIRCLE acoustic

A	B	C	D	E
α_w = 0.65				

PET felt

0.7 NRC

0.74 SAA

CEILING

COLOUR	ORDER CODE
anthracite	0 3 4 - 2 7 1 D 1 1 B
black	0 3 4 - 2 7 1 D 1 1 L
felt grey	0 3 4 - 2 7 1 D 1 1 G
limestone	0 3 4 - 2 7 1 D 1 1 S
marble grey	0 3 4 - 2 7 1 D 1 1 D
white	0 3 4 - 2 7 1 D 1 1 W

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)

Ø(mm)	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
937	0.1	0.27	0.7	1.17	1.07	1
1434	0.3	0.6	1.43	2.3	2.17	2.1


SUSPENDED

COLOUR	ORDER CODE
anthracite	0 3 4 - 2 7 2 D 1 1 B
black	0 3 4 - 2 7 2 D 1 1 L
felt grey	0 3 4 - 2 7 2 D 1 1 G
limestone	0 3 4 - 2 7 2 D 1 1 S
marble grey	0 3 4 - 2 7 2 D 1 1 D
white	0 3 4 - 2 7 2 D 1 1 W

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)

Ø(mm)	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
937	0.5	0.5	0.87	1.3	1.43	1.57
1434	0.97	1.2	1.83	2.67	3.07	3.3

SOUND ABSORPTION COEFFICIENTS

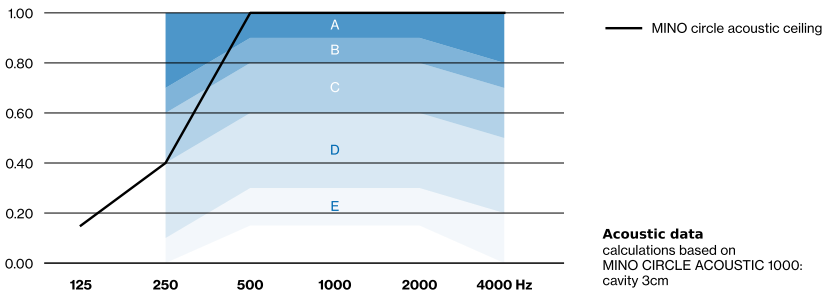


Acoustic data
calculations based on
MINO CIRCLE ACOUSTIC 1000:
cavity 3cm

Order options

DIAMETER	D
937 mm	1
1434 mm	2

COLOUR	
anthracite	RAL 7021
marble grey	RAL 7047
felt grey	RAL 7037
limestone	RAL 070 70 20

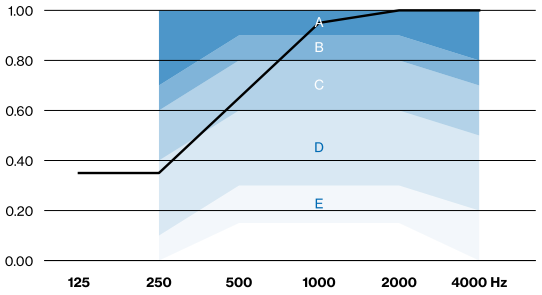

Acoustic data
calculations based on
MINO CIRCLE ACOUSTIC 1000:
cavity 100cm

Office e-sy AG

Suiza

Lighting Design
Studio Z20 AG


Fotografía
Philip Böni




Productos utilizados



MINO 60 CURVE ceiling / suspended system





MINO CIRCLE acoustic ceiling / suspended



SASSO 60 round downlight recessed 1 lamp

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

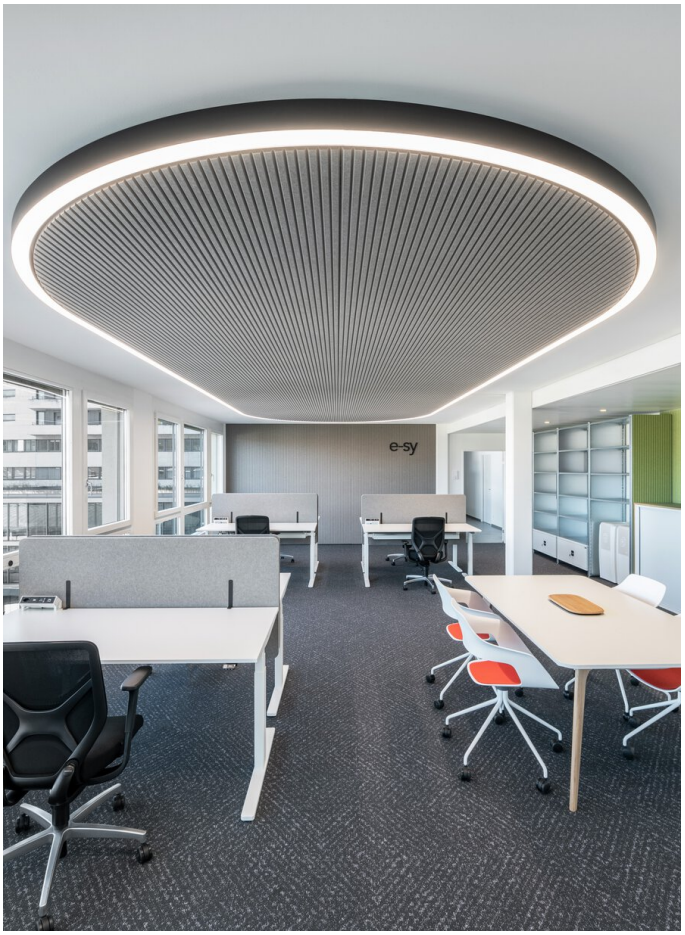
e-sy

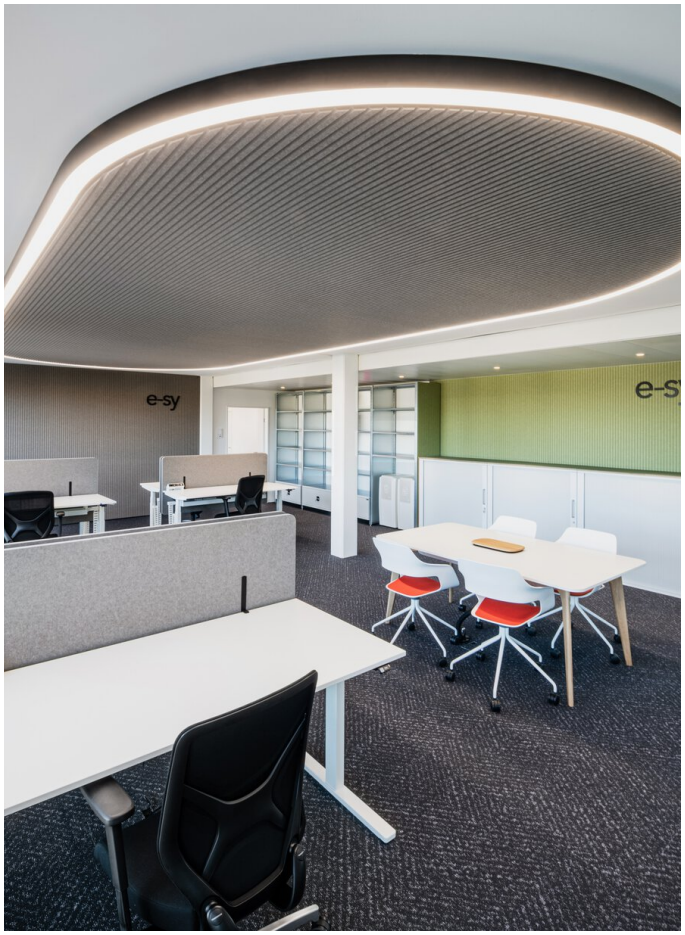
e-sy

