



## MICRO 10

recessed


**EN** Round recessed spotlight in aluminium; surface lacquered; high quality lens system; precise radiation characteristic; energy-efficient LEDs with very good colour rendering; plug and play electrical connector system for toolless mounting; converter plug and play; converter separately available

**ES** Proyector empotrable redondo de aluminio; superficie lacada; óptica de alta calidad; característica proyección precisa; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; sistema de conexión eléctrico metalizado para un montaje sin herramientas; convertidor prefabricado listo para enchufar; el convertidor debe encargarse por separado

### Quickinfo

3000 K, 4000 K  
 CRI  $\geq$  95 / 3 SDCM (initial MacAdam)  
 hasta 99 lm/W  
 L80 / 50000 h, L85 / 50000 h  
 driver no incluido  
 IP20

### Types

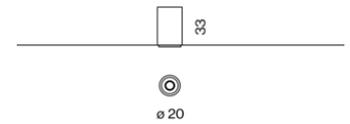


### Color



### Distribución luminosa



CRI  $\geq$  95, R9  $\geq$  90

**MICRO 10** recessed**SPOT** 18°, CRI ≥ 95, excl. driver

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
1.0 W, 350 mA	3000 K	61 lm	60 lm/W	0 1 1 - 8 1 0 0 0 1 <input checked="" type="checkbox"/> S
1.1 W, 350 mA	4000 K	62 lm	58 lm/W	0 1 1 - 8 1 0 0 1 1 <input checked="" type="checkbox"/> S

light inset incl. connection cable with socket 0.5 m

**MEDIUM** 30°, CRI ≥ 95, excl. driver

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
0.9 W, 350 mA	3000 K	92 lm	97 lm/W	0 1 1 - 8 1 0 0 0 1 <input checked="" type="checkbox"/> M
1.0 W, 350 mA	4000 K	100 lm	99 lm/W	0 1 1 - 8 1 0 0 1 1 <input checked="" type="checkbox"/> M

light inset incl. connection cable with socket 0.5 m

**FLOOD** 39°, CRI ≥ 95, excl. driver

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
0.9 W, 350 mA	3000 K	93 lm	98 lm/W	0 1 1 - 8 1 0 0 0 1 <input checked="" type="checkbox"/> F
1.0 W, 350 mA	4000 K	101 lm	99 lm/W	0 1 1 - 8 1 0 0 1 1 <input checked="" type="checkbox"/> F

light inset incl. connection cable with socket 0.5 m

**Electrical mounting accessories (optional)****EXTENSION CABLE** 1 × socket / 1 × plug, 350 mA

feeder length	ORDER CODE
1000 mm	0 1 1 - 9 2 2 1 1 2 0
2000 mm	0 1 1 - 9 2 2 1 1 4 0
4000 mm	0 1 1 - 9 2 2 1 1 8 0

**Electrical accessories (optional)****POWER SUPPLY EU** 350 mA

TYPE	L-W-H (mm)	ORDER CODE
non DIM	115-19-34	0 1 1 - 9 2 1 3 1 1 0
DALI-2	145-33-21	0 1 1 - 9 2 1 3 1 3 0

incl. power cable 2 m + connection cable with plug 1 m

**POWER SUPPLY UL** 350 mA

TYPE	L-W-H (mm)	ORDER CODE
non DIM	115-19-34	0 1 1 - 9 2 8 3 1 1 0
DALI-2/0-10V	111-22-52	0 1 1 - 9 2 8 3 2 3 0

incl. connection cable with plug 1 m

**SPLITTER SERIAL**

TYPE	L-W-H (mm)	ORDER CODE
3 × socket / 1 × plug	38-30-10	0 1 1 - 9 2 2 8 3 0 0
6 × socket / 1 × plug	55-32-10	0 1 1 - 9 2 2 8 6 0 0

**Order options**

COLOUR	<input checked="" type="checkbox"/>
white aluminium RAL 9006	6
tar black RAL 9021	8