



## FINA SUPPORT opal

standing system


**EN** Miniature rectangular lamp made of aluminium; angular design; surface lacquered; plug and play electrical connector system for toolless mounting; different mechanical and electrical poles available; for flexible system design; completely homogeneously illuminated, satinised PMMA cover; light inset rotatable; energy-efficient LEDs with very good colour rendering; converter plug and play; converter separately available

**ES** Miniluminaria rectangular de aluminio; forma angular; superficie lacada; sistema de conexión eléctrico metalizado para un montaje sin herramientas; diferentes postes mecánicos y eléctricos disponibles; para el montaje flexible del sistema; tapa PMMA iluminada homogéneamente con acabado satinado; elemento de luz giratorio; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; convertidor prefabricado listo para enchufar; el convertidor debe encargarse por separado

### Quickinfo

3000 K, 3500 K, 4000 K  
CRI  $\geq 97$  / 3 SDCM (initial MacAdam)  
hasta 1.290 lm/m  
hasta 81 lm/W  
L85 / 50000 h  
driver no incluido  
Opal  
IP20

### Types

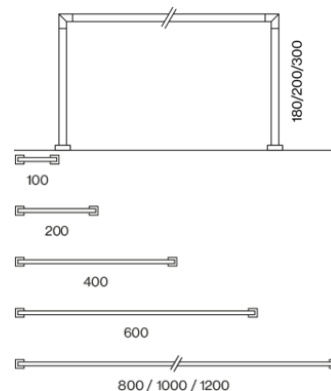

### Colours



### Distribución luminosa




CRI  $\geq 95$ , R9  $\geq 90$




seamless design



360° tiltable



## FINA SUPPORT opal standing system



OPAL CRI ≥ 97, excl. driver

| FIXTURE | LENGTH  | LUM. FLUX | ORDER CODE                                                  |
|---------|---------|-----------|-------------------------------------------------------------|
| 1.5 W   | 100 mm  | 84 lm     | 0 1 1 - 1 2 0 1 : 1 <input checked="" type="checkbox"/> O   |
| 2.0 W   | 135 mm  | 124 lm    | 0 1 1 - 1 2 9 A C : 1 <input checked="" type="checkbox"/> O |
| 2.7 W   | 170 mm  | 165 lm    | 0 1 1 - 1 2 9 A D : 1 <input checked="" type="checkbox"/> O |
| 3.3 W   | 205 mm  | 206 lm    | 0 1 1 - 1 2 9 A E : 1 <input checked="" type="checkbox"/> O |
| 3.6 W   | 200 mm  | 223 lm    | 0 1 1 - 1 2 0 2 : 1 <input checked="" type="checkbox"/> O   |
| 4.0 W   | 240 mm  | 247 lm    | 0 1 1 - 1 2 9 A F : 1 <input checked="" type="checkbox"/> O |
| 4.7 W   | 275 mm  | 288 lm    | 0 1 1 - 1 2 9 A G : 1 <input checked="" type="checkbox"/> O |
| 5.3 W   | 310 mm  | 330 lm    | 0 1 1 - 1 2 9 A H : 1 <input checked="" type="checkbox"/> O |
| 6.0 W   | 345 mm  | 371 lm    | 0 1 1 - 1 2 9 A I : 1 <input checked="" type="checkbox"/> O |
| 6.7 W   | 380 mm  | 412 lm    | 0 1 1 - 1 2 9 A J : 1 <input checked="" type="checkbox"/> O |
| 7.3 W   | 400 mm  | 446 lm    | 0 1 1 - 1 2 0 3 : 1 <input checked="" type="checkbox"/> O   |
| 7.4 W   | 415 mm  | 453 lm    | 0 1 1 - 1 2 9 A K : 1 <input checked="" type="checkbox"/> O |
| 8.0 W   | 450 mm  | 494 lm    | 0 1 1 - 1 2 9 A L : 1 <input checked="" type="checkbox"/> O |
| 8.7 W   | 485 mm  | 536 lm    | 0 1 1 - 1 2 9 A M : 1 <input checked="" type="checkbox"/> O |
| 9.4 W   | 520 mm  | 577 lm    | 0 1 1 - 1 2 9 A N : 1 <input checked="" type="checkbox"/> O |
| 10.0 W  | 555 mm  | 618 lm    | 0 1 1 - 1 2 9 A O : 1 <input checked="" type="checkbox"/> O |
| 10.6 W  | 590 mm  | 659 lm    | 0 1 1 - 1 2 9 A P : 1 <input checked="" type="checkbox"/> O |
| 11.4 W  | 625 mm  | 700 lm    | 0 1 1 - 1 2 9 A Q : 1 <input checked="" type="checkbox"/> O |
| 11.6 W  | 600 mm  | 714 lm    | 0 1 1 - 1 2 0 4 : 1 <input checked="" type="checkbox"/> O   |
| 12.0 W  | 660 mm  | 742 lm    | 0 1 1 - 1 2 9 A R : 1 <input checked="" type="checkbox"/> O |
| 12.7 W  | 695 mm  | 783 lm    | 0 1 1 - 1 2 9 A S : 1 <input checked="" type="checkbox"/> O |
| 13.4 W  | 730 mm  | 824 lm    | 0 1 1 - 1 2 9 A T : 1 <input checked="" type="checkbox"/> O |
| 14.0 W  | 765 mm  | 865 lm    | 0 1 1 - 1 2 9 A U : 1 <input checked="" type="checkbox"/> O |
| 14.6 W  | 800 mm  | 892 lm    | 0 1 1 - 1 2 0 5 : 1 <input checked="" type="checkbox"/> O   |
| 15.3 W  | 835 mm  | 947 lm    | 0 1 1 - 1 2 9 A W : 1 <input checked="" type="checkbox"/> O |
| 16.1 W  | 870 mm  | 989 lm    | 0 1 1 - 1 2 9 A X : 1 <input checked="" type="checkbox"/> O |
| 16.7 W  | 905 mm  | 1030 lm   | 0 1 1 - 1 2 9 A Y : 1 <input checked="" type="checkbox"/> O |
| 17.3 W  | 940 mm  | 1070 lm   | 0 1 1 - 1 2 9 A Z : 1 <input checked="" type="checkbox"/> O |
| 18.1 W  | 975 mm  | 1110 lm   | 0 1 1 - 1 2 9 B A : 1 <input checked="" type="checkbox"/> O |
| 18.2 W  | 1000 mm | 1110 lm   | 0 1 1 - 1 2 0 6 : 1 <input checked="" type="checkbox"/> O   |
| 18.7 W  | 1010 mm | 1150 lm   | 0 1 1 - 1 2 9 B B : 1 <input checked="" type="checkbox"/> O |
| 19.4 W  | 1045 mm | 1190 lm   | 0 1 1 - 1 2 9 B C : 1 <input checked="" type="checkbox"/> O |
| 20.1 W  | 1080 mm | 1240 lm   | 0 1 1 - 1 2 9 B D : 1 <input checked="" type="checkbox"/> O |
| 20.7 W  | 1115 mm | 1280 lm   | 0 1 1 - 1 2 9 B E : 1 <input checked="" type="checkbox"/> O |
| 21.4 W  | 1150 mm | 1320 lm   | 0 1 1 - 1 2 9 B F : 1 <input checked="" type="checkbox"/> O |
| 21.8 W  | 1200 mm | 1340 lm   | 0 1 1 - 1 2 0 7 : 1 <input checked="" type="checkbox"/> O   |


The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to colour temperature 3500 K, 4000 K. Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions

### Order options

| WIDTH | W | WIDTH  | W | COLOUR TEMPERATURE | :: | COLOUR                   | <input checked="" type="checkbox"/> |
|-------|---|--------|---|--------------------|----|--------------------------|-------------------------------------|
| 20 mm | 1 | 95 mm  | 7 | 3000 K             | 0  | white aluminium RAL 9006 | 6                                   |
| 35 mm | 4 | 100 mm | 8 | 4000 K             | 1  | tar black RAL 9021       | 8                                   |
| 50 mm | 5 |        |   | 3500 K             | 2  |                          |                                     |
| 85 mm | 6 |        |   |                    |    |                          |                                     |



## FINA SUPPORT opal 30° standing system



OPAL CRI ≥ 97, excl. driver


| FIXTURE | LENGTH  | LUM. FLUX | ORDER CODE                                                  |
|---------|---------|-----------|-------------------------------------------------------------|
| 1.5 W   | 100 mm  | 84 lm     | 0 1 1 - 1 3 0 1 : 1 <input checked="" type="checkbox"/> O   |
| 2.0 W   | 135 mm  | 124 lm    | 0 1 1 - 1 3 9 A C : 1 <input checked="" type="checkbox"/> O |
| 2.7 W   | 170 mm  | 165 lm    | 0 1 1 - 1 3 9 A D : 1 <input checked="" type="checkbox"/> O |
| 3.3 W   | 205 mm  | 206 lm    | 0 1 1 - 1 3 9 A E : 1 <input checked="" type="checkbox"/> O |
| 3.6 W   | 200 mm  | 223 lm    | 0 1 1 - 1 3 0 2 : 1 <input checked="" type="checkbox"/> O   |
| 4.0 W   | 240 mm  | 247 lm    | 0 1 1 - 1 3 9 A F : 1 <input checked="" type="checkbox"/> O |
| 4.7 W   | 275 mm  | 288 lm    | 0 1 1 - 1 3 9 A G : 1 <input checked="" type="checkbox"/> O |
| 5.3 W   | 310 mm  | 330 lm    | 0 1 1 - 1 3 9 A H : 1 <input checked="" type="checkbox"/> O |
| 6.0 W   | 345 mm  | 371 lm    | 0 1 1 - 1 3 9 A I : 1 <input checked="" type="checkbox"/> O |
| 6.7 W   | 380 mm  | 412 lm    | 0 1 1 - 1 3 9 A J : 1 <input checked="" type="checkbox"/> O |
| 7.3 W   | 400 mm  | 446 lm    | 0 1 1 - 1 3 0 3 : 1 <input checked="" type="checkbox"/> O   |
| 7.4 W   | 415 mm  | 453 lm    | 0 1 1 - 1 3 9 A K : 1 <input checked="" type="checkbox"/> O |
| 8.0 W   | 450 mm  | 494 lm    | 0 1 1 - 1 3 9 A L : 1 <input checked="" type="checkbox"/> O |
| 8.7 W   | 485 mm  | 536 lm    | 0 1 1 - 1 3 9 A M : 1 <input checked="" type="checkbox"/> O |
| 9.4 W   | 520 mm  | 577 lm    | 0 1 1 - 1 3 9 A N : 1 <input checked="" type="checkbox"/> O |
| 10.0 W  | 555 mm  | 618 lm    | 0 1 1 - 1 3 9 A O : 1 <input checked="" type="checkbox"/> O |
| 10.6 W  | 590 mm  | 659 lm    | 0 1 1 - 1 3 9 A P : 1 <input checked="" type="checkbox"/> O |
| 11.4 W  | 625 mm  | 700 lm    | 0 1 1 - 1 3 9 A Q : 1 <input checked="" type="checkbox"/> O |
| 11.6 W  | 600 mm  | 714 lm    | 0 1 1 - 1 3 0 4 : 1 <input checked="" type="checkbox"/> O   |
| 12.0 W  | 660 mm  | 742 lm    | 0 1 1 - 1 3 9 A R : 1 <input checked="" type="checkbox"/> O |
| 12.7 W  | 695 mm  | 783 lm    | 0 1 1 - 1 3 9 A S : 1 <input checked="" type="checkbox"/> O |
| 13.4 W  | 730 mm  | 824 lm    | 0 1 1 - 1 3 9 A T : 1 <input checked="" type="checkbox"/> O |
| 14.0 W  | 765 mm  | 865 lm    | 0 1 1 - 1 3 9 A U : 1 <input checked="" type="checkbox"/> O |
| 14.6 W  | 800 mm  | 892 lm    | 0 1 1 - 1 3 0 5 : 1 <input checked="" type="checkbox"/> O   |
| 15.3 W  | 835 mm  | 947 lm    | 0 1 1 - 1 3 9 A W : 1 <input checked="" type="checkbox"/> O |
| 16.1 W  | 870 mm  | 989 lm    | 0 1 1 - 1 3 9 A X : 1 <input checked="" type="checkbox"/> O |
| 16.7 W  | 905 mm  | 1030 lm   | 0 1 1 - 1 3 9 A Y : 1 <input checked="" type="checkbox"/> O |
| 17.3 W  | 940 mm  | 1070 lm   | 0 1 1 - 1 3 9 A Z : 1 <input checked="" type="checkbox"/> O |
| 18.1 W  | 975 mm  | 1110 lm   | 0 1 1 - 1 3 9 B A : 1 <input checked="" type="checkbox"/> O |
| 18.2 W  | 1000 mm | 1110 lm   | 0 1 1 - 1 3 0 6 : 1 <input checked="" type="checkbox"/> O   |
| 18.7 W  | 1010 mm | 1150 lm   | 0 1 1 - 1 3 9 B B : 1 <input checked="" type="checkbox"/> O |
| 19.4 W  | 1045 mm | 1190 lm   | 0 1 1 - 1 3 9 B C : 1 <input checked="" type="checkbox"/> O |
| 20.1 W  | 1080 mm | 1240 lm   | 0 1 1 - 1 3 9 B D : 1 <input checked="" type="checkbox"/> O |
| 20.7 W  | 1115 mm | 1280 lm   | 0 1 1 - 1 3 9 B E : 1 <input checked="" type="checkbox"/> O |
| 21.4 W  | 1150 mm | 1320 lm   | 0 1 1 - 1 3 9 B F : 1 <input checked="" type="checkbox"/> O |
| 21.8 W  | 1200 mm | 1340 lm   | 0 1 1 - 1 3 0 7 : 1 <input checked="" type="checkbox"/> O   |

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to colour temperature 3500 K, 4000 K. Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions


### Order options

| WIDTH | W | WIDTH  | W | COLOUR TEMPERATURE | W | COLOUR                   | W |
|-------|---|--------|---|--------------------|---|--------------------------|---|
| 20 mm | 1 | 95 mm  | 7 | 3000 K             | 0 | white aluminium RAL 9006 | 6 |
| 35 mm | 4 | 100 mm | 8 | 4000 K             | 1 | tar black RAL 9021       | 8 |
| 50 mm | 5 |        |   | 3500 K             | 2 |                          |   |
| 85 mm | 6 |        |   |                    |   |                          |   |

Planning Information

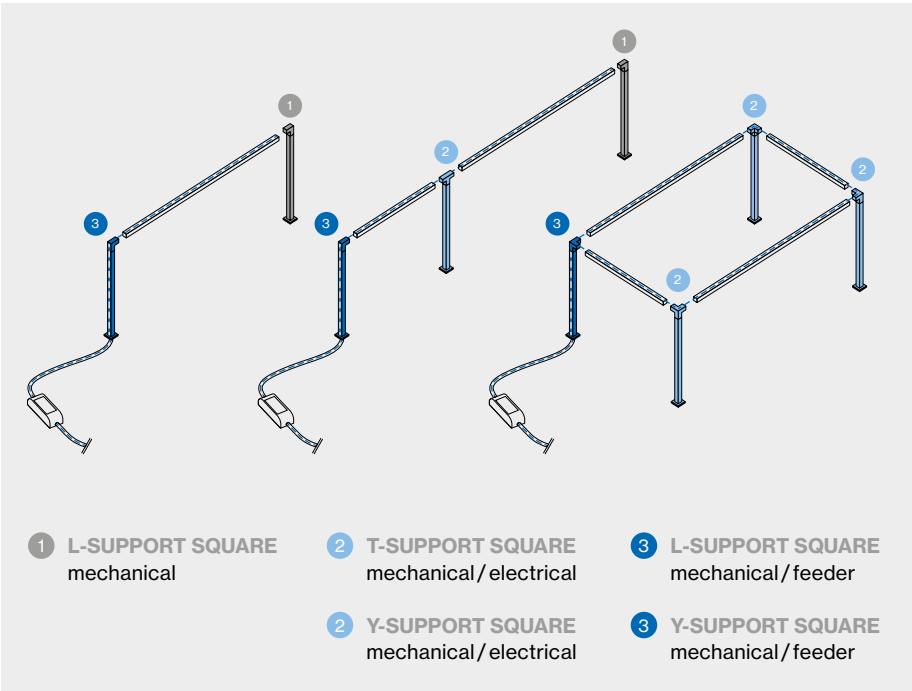


Electrical mounting accessories (optional)



CONNECTION CABLE

| TYPE                   | ORDER CODE            |
|------------------------|-----------------------|
| 1 × open / 1 × DC plug | 0 1 1 - 9 2 2 2 6 2 0 |




EXTENSION CABLE 1 × socket / 1 × plug, 350 mA

| feeder length | ORDER CODE            |
|---------------|-----------------------|
| 1000 mm       | 0 1 1 - 9 2 2 2 1 2 0 |
| 2000 mm       | 0 1 1 - 9 2 2 2 1 4 0 |
| 4000 mm       | 0 1 1 - 9 2 2 2 1 8 0 |

FLEX CONNECTOR 0-83° electrical

| L-W (mm) | ORDER CODE            |
|----------|-----------------------|
| 33-6     | 0 1 1 - 9 2 2 5 4 0 0 |




MOUNTING POLE L mechanical / feeder

| COLOUR          | L-W (mm) | ORDER CODE            |
|-----------------|----------|-----------------------|
| white aluminium | 180-20   | 0 1 1 - 9 1 2 1 1 3 6 |
| tar black       | 180-20   | 0 1 1 - 9 1 2 1 1 3 8 |
| white aluminium | 200-20   | 0 1 1 - 9 1 2 1 2 3 6 |
| tar black       | 200-20   | 0 1 1 - 9 1 2 1 2 3 8 |
| white aluminium | 300-20   | 0 1 1 - 9 1 2 1 3 3 6 |
| tar black       | 300-20   | 0 1 1 - 9 1 2 1 3 3 8 |
| white aluminium | 180-35   | 0 1 1 - 9 1 2 4 1 3 6 |
| tar black       | 180-35   | 0 1 1 - 9 1 2 4 1 3 8 |
| white aluminium | 200-35   | 0 1 1 - 9 1 2 4 2 3 6 |

Order options

| WIDTH | W | WIDTH  | W | COLOUR TEMPERATURE | COLOUR | COLOUR                   |
|-------|---|--------|---|--------------------|--------|--------------------------|
| 20 mm | 1 | 95 mm  | 7 | 3000 K             | 0      | white aluminium RAL 9006 |
| 35 mm | 4 | 100 mm | 8 | 4000 K             | 1      | tar black RAL 9021       |
| 50 mm | 5 |        |   | 3500 K             | 2      |                          |
| 85 mm | 6 |        |   |                    |        |                          |


| COLOUR          | L-W (mm) | ORDER CODE            |
|-----------------|----------|-----------------------|
| tar black       | 200-35   | 0 1 1 - 9 1 2 4 2 3 8 |
| white aluminium | 300-35   | 0 1 1 - 9 1 2 4 3 3 6 |
| tar black       | 300-35   | 0 1 1 - 9 1 2 4 3 3 8 |
| white aluminium | 180-50   | 0 1 1 - 9 1 2 5 1 3 6 |
| tar black       | 180-50   | 0 1 1 - 9 1 2 5 1 3 8 |
| white aluminium | 200-50   | 0 1 1 - 9 1 2 5 2 3 6 |
| tar black       | 200-50   | 0 1 1 - 9 1 2 5 2 3 8 |
| white aluminium | 300-50   | 0 1 1 - 9 1 2 5 3 3 6 |
| tar black       | 300-50   | 0 1 1 - 9 1 2 5 3 3 8 |
| white aluminium | 180-85   | 0 1 1 - 9 1 2 6 1 3 6 |
| tar black       | 180-85   | 0 1 1 - 9 1 2 6 1 3 8 |
| white aluminium | 200-85   | 0 1 1 - 9 1 2 6 2 3 6 |
| tar black       | 200-85   | 0 1 1 - 9 1 2 6 2 3 8 |
| white aluminium | 300-85   | 0 1 1 - 9 1 2 6 3 3 6 |
| tar black       | 300-85   | 0 1 1 - 9 1 2 6 3 3 8 |
| white aluminium | 180-95   | 0 1 1 - 9 1 2 7 1 3 6 |
| tar black       | 180-95   | 0 1 1 - 9 1 2 7 1 3 8 |
| white aluminium | 200-95   | 0 1 1 - 9 1 2 7 2 3 6 |
| tar black       | 200-95   | 0 1 1 - 9 1 2 7 2 3 8 |
| white aluminium | 300-95   | 0 1 1 - 9 1 2 7 3 3 6 |
| tar black       | 300-95   | 0 1 1 - 9 1 2 7 3 3 8 |
| white aluminium | 180-100  | 0 1 1 - 9 1 2 8 1 3 6 |
| tar black       | 180-100  | 0 1 1 - 9 1 2 8 1 3 8 |
| white aluminium | 200-100  | 0 1 1 - 9 1 2 8 2 3 6 |
| tar black       | 200-100  | 0 1 1 - 9 1 2 8 2 3 8 |
| white aluminium | 300-100  | 0 1 1 - 9 1 2 8 3 3 6 |
| tar black       | 300-100  | 0 1 1 - 9 1 2 8 3 3 8 |

**MOUNTING POLE T mechanical / electrical**

| L-W (mm) | ORDER CODE                                              |
|----------|---------------------------------------------------------|
| 180-31   | 0 1 1 - 9 1 2 2 1 2 <input checked="" type="checkbox"/> |
| 200-31   | 0 1 1 - 9 1 2 2 2 2 <input checked="" type="checkbox"/> |
| 300-31   | 0 1 1 - 9 1 2 2 3 2 <input checked="" type="checkbox"/> |

**MOUNTING POLE Y mechanical / electrical**

| L-W (mm) | ORDER CODE                                              |
|----------|---------------------------------------------------------|
| 180-24   | 0 1 1 - 9 1 2 3 1 2 <input checked="" type="checkbox"/> |
| 200-24   | 0 1 1 - 9 1 2 3 2 2 <input checked="" type="checkbox"/> |
| 300-24   | 0 1 1 - 9 1 2 3 3 2 <input checked="" type="checkbox"/> |


**MOUNTING POLE Y mechanical / feeder**

| L-W (mm) | ORDER CODE                                              |
|----------|---------------------------------------------------------|
| 180-24   | 0 1 1 - 9 1 2 3 1 3 <input checked="" type="checkbox"/> |
| 200-24   | 0 1 1 - 9 1 2 3 2 3 <input checked="" type="checkbox"/> |
| 300-24   | 0 1 1 - 9 1 2 3 3 3 <input checked="" type="checkbox"/> |

**Order options**

| WIDTH | W | WIDTH  | W | COLOUR TEMPERATURE | W | COLOUR                   | W |
|-------|---|--------|---|--------------------|---|--------------------------|---|
| 20 mm | 1 | 95 mm  | 7 | 3000 K             | 0 | white aluminium RAL 9006 | 6 |
| 35 mm | 4 | 100 mm | 8 | 4000 K             | 1 | tar black RAL 9021       | 8 |
| 50 mm | 5 |        |   | 3500 K             | 2 |                          |   |
| 85 mm | 6 |        |   |                    |   |                          |   |

## Mounting accessories (optional)



### MOUNTING POLE L mechanical

| L (mm) | ORDER CODE                                                     |
|--------|----------------------------------------------------------------|
| 180    | 0 1 1 - 9 1 2 <b>W</b> 1 1 <input checked="" type="checkbox"/> |
| 200    | 0 1 1 - 9 1 2 <b>W</b> 2 1 <input checked="" type="checkbox"/> |
| 300    | 0 1 1 - 9 1 2 <b>W</b> 3 1 <input checked="" type="checkbox"/> |

## Electrical accessories (optional)

### POWER SUPPLY 24V EU PC2

| TYPE            | INPUT VOLTAGE | EFFICIENCY | L-W-H (mm) | ORDER CODE            |
|-----------------|---------------|------------|------------|-----------------------|
| 18 W   non DIM  | 198-264 V AC  | η 86 %     | 130-43-30  | 0 1 1 - 9 2 1 2 1 1 0 |
| 35 W   non DIM  | 198-264 V AC  | η 86 %     | 195-43-30  | 0 1 1 - 9 2 1 2 2 1 0 |
| 100 W   non DIM | 198-264 V AC  | η 92 %     | 220-43-30  | 0 1 1 - 9 2 1 2 3 1 0 |
| 18 W   DALI-2   | 198-264 V AC  | η 84 %     | 130-43-30  | 0 1 1 - 9 2 1 2 1 3 0 |
| 35 W   DALI-2   | 198-264 V AC  | η 89 %     | 195-43-30  | 0 1 1 - 9 2 1 2 2 3 0 |
| 60 W   DALI-2   | 198-240 V AC  | η 93 %     | 220-43-30  | 0 1 1 - 9 2 1 2 3 3 0 |

incl. power cable 2m + connection cable with plug 1m

### POWER SUPPLY 24V UL non DIM, 100-305 V AC, PC2

| TYPE | EFFICIENCY | L-W-H (mm) | ORDER CODE            |
|------|------------|------------|-----------------------|
| 25 W | η 88 %     | 147-40-32  | 0 1 1 - 9 2 7 2 1 1 0 |
| 40 W | η 88 %     | 147-40-32  | 0 1 1 - 9 2 7 2 2 1 0 |
| 60 W | η 87 %     | 176-45-32  | 0 1 1 - 9 2 7 2 3 1 0 |

### POWER SUPPLY 24V UL incl. metalbox non DIM, 100-305 V AC, PC2

| TYPE | EFFICIENCY | L-W-H (mm) | ORDER CODE            |
|------|------------|------------|-----------------------|
| 25 W | η 88 %     | 196-68-45  | 0 1 1 - 9 2 9 2 1 1 0 |
| 40 W | η 88 %     | 196-68-45  | 0 1 1 - 9 2 9 2 2 1 0 |
| 60 W | η 87 %     | 223-66-55  | 0 1 1 - 9 2 9 2 3 1 0 |

### SYSTEM SPLITTER

| TYPE  | ORDER CODE            |
|-------|-----------------------|
| 3 way | 0 1 1 - 9 2 3 8 3 0 0 |
| 6 way | 0 1 1 - 9 2 3 8 6 0 0 |

### Order options

| WIDTH | <b>W</b> | WIDTH  | <b>W</b> | COLOUR TEMPERATURE | <b>∴</b> | COLOUR                   | <input checked="" type="checkbox"/> |
|-------|----------|--------|----------|--------------------|----------|--------------------------|-------------------------------------|
| 20 mm | 1        | 95 mm  | 7        | 3000 K             | 0        | white aluminium RAL 9006 | 6                                   |
| 35 mm | 4        | 100 mm | 8        | 4000 K             | 1        | tar black RAL 9021       | 8                                   |
| 50 mm | 5        |        |          | 3500 K             | 2        |                          |                                     |
| 85 mm | 6        |        |          |                    |          |                          |                                     |

## Pole overview



### L-SUPPORT standing

**EN** Arranged linearly along the showcase table, FINA support System, electrically and mechanically connected via the L-Support Poles, ensures excellent illumination of the products or exhibits without restricting the view.

**DE** Lineare angeordnet entlang des Vitrinen Tisches sorgt FINA support System, elektrisch und mechanisch über die L-Support Pole verbunden, für eine hervorragende Ausleuchtung der Ware oder Exponate, ohne den Blick darauf einzuschränken.



### T-SUPPORT standing

**EN** The T-Support Pole of the FINA support system is primarily used for large display case when several light insets are combined and arranged in a row. The T-Support poles are used to connect them together electrically and mechanically.

**DE** Die T-Support Pole des FINA support Systems findet vor allem bei großen Vitrinenflächen ihren Einsatz, wenn mehrere Lichteinsätze kombiniert und aneinandergereiht werden. Mittels der T-Support Pole werden diese elektrisch und mechanisch miteinander verbunden.



### Y-SUPPORT standing

**EN** The Y-connectors of the FINA support system enable ideal illumination of the entire display case by allowing different insets to be mechanically and electrically connected to each other, even via corners.

**DE** Die Y-Connectors des FINA support Systems ermöglichen eine ideale Ausleuchtung der gesamten Vitrine, indem unterschiedliche Insets auch über Ecken miteinander mechanisch und elektrisch verbunden werden können.