



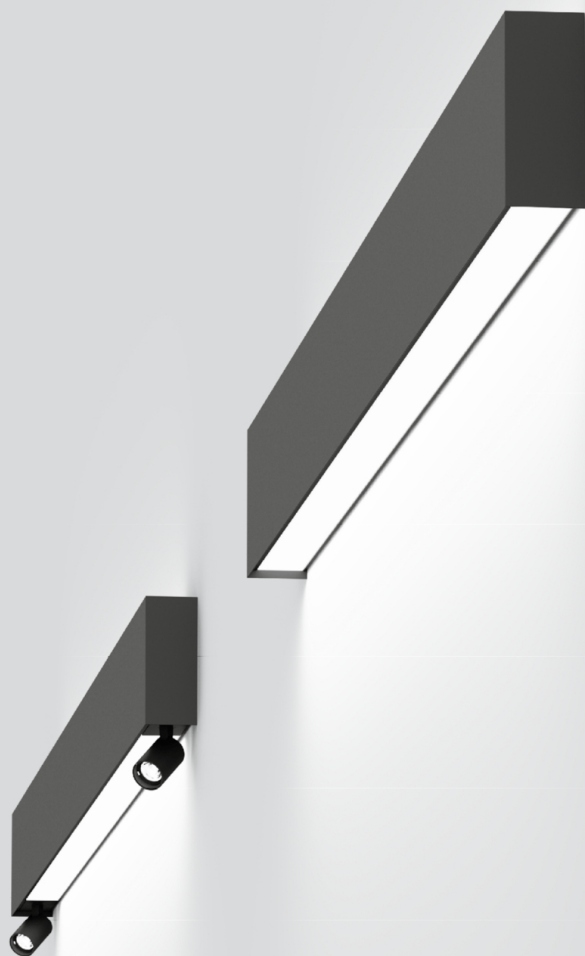

Quickinfo

3000 K, 4000 K, tunable white
 2700 K - 5000 K
 $\text{CRI} \geq 90$, $\text{CRI} \geq 97 / 3 \text{ SDCM}$
 jusqu'à $\downarrow 4,030 \text{ lm}$ / $\uparrow 4,790 \text{ lm}$
 jusqu'à $3,670 \text{ lm/m}$
 jusqu'à 121 lm/W
 L80 / 50000 h, L85 / 50000 h,
 L95 / 50000 h
 DALI-2, DALI-2 / DIM interrupteur
 (uniquement spots), non DIM, non
 DIM / ON/OFF interrupteur
 (seulement spots)
 High Performance Opal, High
 Performance Opal / Asymmetric
 IP20

Types



Couleur



Répartition de la lumière




LINEA

^{EN} Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; HPO (High Performance Opal) cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed; optionally with switch for the JUST 26 spotlight modules


^{FR} Corps de luminaire et cache avant en profil extrudé en aluminium, version à bords en arête; aucune vis visible; surface thermolaquée; convient à un montage mural; éclairage homogène du mur ou du plafond par une distribution de lumière uniforme directe / indirecte; cache HPO (High Performance Opal) pour éclairage homogène; ou avec lentille spécialement calculée et asym. pour des intensités lum. homogènes (montage au choix pour éclairage du sol ou du plafond); LED économes en énergie à restitution de couleur élevée; insert de spot JUST 26 montable au choix; en option avec interrupteur pour les modules de spots JUST 26



system solution



$\text{CRI} \geq 98$
 XPECTRUM
 (optional)



LINEA wall



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
9.7 W	310 mm	3000 K	↓428/↑509 lm	97 lm/W	0 5 8 - 6 1 7 1 5 A A
		4000 K	↓472/↑562 lm	107 lm/W	0 5 8 - 6 1 7 1 6 A A
17.6 W	610 mm	3000 K	↓881/↑1050 lm	110 lm/W	0 5 8 - 6 1 7 2 5 A A
		4000 K	↓972/↑1160 lm	121 lm/W	0 5 8 - 6 1 7 2 6 A A
20.9 W	610 mm	tunable w.	↓1010/↑1200 lm	106 lm/W	0 5 8 - 6 1 7 2 D 3 A A
35.0 W	1210 mm	3000 K	↓1760/↑2090 lm	110 lm/W	0 5 8 - 6 1 7 4 5 A A
		4000 K	↓1940/↑2310 lm	121 lm/W	0 5 8 - 6 1 7 4 6 A A
42.0 W	1210 mm	tunable w.	↓2020/↑2400 lm	105 lm/W	0 5 8 - 6 1 7 4 D 3 A A
71.0 W	2410 mm	3000 K	↓3520/↑4190 lm	109 lm/W	0 5 8 - 6 1 7 8 5 A A
		4000 K	↓3890/↑4620 lm	120 lm/W	0 5 8 - 6 1 7 8 6 A A
83.0 W	2410 mm	tunable w.	↓4030/↑4790 lm	106 lm/W	0 5 8 - 6 1 7 8 D 3 A A

OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
9.7 W	310 mm	3000 K	↓428/↑428 lm	88 lm/W	0 5 8 - 6 1 7 1 5 A H
		4000 K	↓472/↑472 lm	97 lm/W	0 5 8 - 6 1 7 1 6 A H
17.6 W	610 mm	3000 K	↓881/↑881 lm	100 lm/W	0 5 8 - 6 1 7 2 5 A H
		4000 K	↓972/↑972 lm	110 lm/W	0 5 8 - 6 1 7 2 6 A H
20.9 W	610 mm	tunable w.	↓1010/↑1010 lm	97 lm/W	0 5 8 - 6 1 7 2 D 3 A H
35.0 W	1210 mm	3000 K	↓1760/↑1760 lm	101 lm/W	0 5 8 - 6 1 7 4 5 A H
		4000 K	↓1940/↑1940 lm	111 lm/W	0 5 8 - 6 1 7 4 6 A H
42.0 W	1210 mm	tunable w.	↓2020/↑2020 lm	96 lm/W	0 5 8 - 6 1 7 4 D 3 A H
71.0 W	2410 mm	3000 K	↓3520/↑3520 lm	99 lm/W	0 5 8 - 6 1 7 8 5 A H
		4000 K	↓3890/↑3890 lm	110 lm/W	0 5 8 - 6 1 7 8 6 A H
83.0 W	2410 mm	tunable w.	↓4030/↑4030 lm	97 lm/W	0 5 8 - 6 1 7 8 D 3 A H



LINEA 1 spotlight wall



OPAL / OPAL | 1 SPOTLIGHT CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
17.6 W	710 mm	3000 K	↓873/↑873 lm	99 lm/W	0 5 8 - 6 1 7 2 5 H
		4000 K	↓963/↑963 lm	109 lm/W	0 5 8 - 6 1 7 2 6 H
20.9 W	710 mm	tunable w.	↓1010/↑1010 lm	97 lm/W	0 5 8 - 6 1 7 2 D H
35.0 W	1310 mm	3000 K	↓1760/↑1720 lm	99 lm/W	0 5 8 - 6 1 7 4 5 H
		4000 K	↓1940/↑1900 lm	110 lm/W	0 5 8 - 6 1 7 4 6 H
42.0 W	1310 mm	tunable w.	↓2020/↑2020 lm	96 lm/W	0 5 8 - 6 1 7 4 D H
70.0 W	2510 mm	3000 K	↓3490/↑3490 lm	100 lm/W	0 5 8 - 6 1 7 8 5 H
		4000 K	↓3850/↑3850 lm	110 lm/W	0 5 8 - 6 1 7 8 6 H
83.0 W	2510 mm	tunable w.	↓4030/↑4030 lm	97 lm/W	0 5 8 - 6 1 7 8 D H

spotlight 1 x 2,6 W / 159 lm only with 3000 K

Order options

CONTROL		CONTROL		CONTROL		COLOUR	
non DIM	1	non DIM / ON/OFF switch (only spotlights)	2	DALI-2	3	pure white RAL 9010	7
DALI-2	3	DALI-2	3	DALI-2 / DIM switch (only spotlights)	4	jet black RAL 9005	8
		DALI-2 / DIM switch (only spotlights)	4				

MOUNTING	
spotlight left	B
spotlight right	C



LINEA 2 spotlights wall

TUNABLE
WHITECRI
≥ 90


220-240 V

DALI
1ADDR.

X-PERT

X-PERT

OPAL / OPAL | 2 SPOTLIGHTS CRI ≥ 90



SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
35.0 W	1410 mm	3000 K	↓1760/↑1720 lm	99 lm/W	0 5 8 - 6 1 7 4 5 D H
		4000 K	↓1940/↑1900 lm	110 lm/W	0 5 8 - 6 1 7 4 6 D H
42.0 W	1410 mm	tunable w.	↓2020/↑2020 lm	96 lm/W	0 5 8 - 6 1 7 4 D D H
70.0 W	2610 mm	3000 K	↓3490/↑3490 lm	100 lm/W	0 5 8 - 6 1 7 8 5 D H
		4000 K	↓3850/↑3850 lm	110 lm/W	0 5 8 - 6 1 7 8 6 D H
83.0 W	2610 mm	tunable w.	↓4030/↑4030 lm	97 lm/W	0 5 8 - 6 1 7 8 D D H

spotlights 2 x 2,6 W / 159 lm only with 3000K

Order options

CONTROL

non DIM / ON OFF switch (only spotlights)	1 2
DALI-2	3
DALI-2 / DIM switch (only spotlights)	4

CONTROL

DALI-2	2 3
DALI-2 / DIM switch (only spotlights)	4

COLOUR

pure white RAL 9010	7
jet black RAL 9005	8

SNS Headquarters, Moscow

Russie

Architecte

Fedor Raschevsky, Peter
Kholkovsky

Lighting Design

Sergey Ananiev

Photographe

Light&Design



Produits utilisés



LINEA



MINIMAL 100
trimless system



LINEA system

