



## PABLO colour tune/tunable white

track

**EN** Track light made of die-cast aluminium; powder coated; converter in spotlight housing; COB (Chip on Board) technology or CSP (Chip-Scale-Packaging) technology for maximum efficiency; no multiple shadows; energy-eff. LEDs – very good colour rendering; high quality aluminium refl., spherical facet finish; high-gloss anodised; precise radiation charact. – different beam angles; installed/exchanged without tools; optical attachments as accessories; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, as an accessory


**FR** Spot sur rail en fonte d'aluminium injectée ; thermolaquée ; convertisseur dans boîtier de spot ; technologie COB (Chip on Board) ou CSP (Chip-Scale-Packaging) pour un rendement maximum ; pas d'ombres multiples ; LED à haut rend. énerg. – excellent rendu coul. ; réflecteur en alu., optique à facettes sphérique ; anodisé haute brillance ; caract. de rayonn. précises – différents angles de rayonn. ; montage/échange sans outil ; éléments optiques comme accessoires ; adaptateur pour installation ou déplacement sans outil dans différents rails triP hasés ; fixation de l'adaptateur au choix sans outils par vis moletée ou vis de serrage (tournevis nécessaire) ; point de sortie, au choix dans un boîtier en saillie ou comme variante pour encastrement, comme accessoire

### Quickinfo

PABLO colour tune  
3500K red/blue  
CRI ≥ 90, 3 SDCM  
up to 54lm/W  
L95 @ 50000h  
DALI-2

PABLO tunable white  
TW 2700–5000K  
CRI ≥ 95, 3 SDCM  
up to 48lm/W  
L80 @ 50000h  
DALI-2 DT8

### Type



### Colours



### Light distributions



DiiA® standards  
251, 252, 253




360° rotatable  
245°/65° tiltable



rotation  
lock



colour tune  
(3500K red/blue)



tunable white  
2700–5000K

## Order options

### ADAPTER FIXATION


tool-free fixation	2
set screw (tool required)	1

### MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

### BEAM ANGLE

medium 20/24°	M
flood 38°	F



## PABLO colour tune




### TRACK LIGHT

SYS. POWER	COLOUR TEMPERATURE	LUMINOUS FLUX	ORDER CODE
18.8 W	3500K red/blue	1020lm	1 8 0 - 5 6 0 0 G 3

## Fresh colour for historical works of art



PABLO colour tune was developed to revitalise historical art, which is particularly worthy of protection, true to the original. An increased, individually adjustable red-blue saturation compensates for time-related colour damage – purely through the lighting. This reawakens the original colours of a work of art. The correct setting of PABLO colour tune can be easily controlled and adjusted via DALI-2.



## PABLO tunable white



### TRACK LIGHT

SYS. POWER	COLOUR TEMPERATURE	LUMINOUS FLUX	ORDER CODE
20.7 W	2700 – 5000K	954lm	1 8 0 - 5 6 0 0 D 3

## Optical accessories

### SNOOT | HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
snoot	62-33	0 8 0 - 5 9 0 0 0 0 8
honeycomb louver	61-3	0 8 0 - 5 9 0 0 0 1 8

## Mounting accessories


### SURFACE HOUSING/POINT OUTLET

TYPE	ORDER CODE
surface housing/point outlet	1 8 6 - 0 7 2 2 8

### RECESSED HOUSING/POINT OUTLET

ceiling thickness: 1-30 mm

TYPE	ORDER CODE
recessed housing/point outlet	1 8 6 - 0 7 2 2 7





**Types**



**Colours**



**TRACK 3-phase**  
recessed/surface/suspended



curve connector



optimised adapter integration

# TRACK recessed

## Order options

### CONTROL


non DIM

DALI-2

### MATERIAL COLOUR

- pure white RAL 9010 7
- jet black RAL 9005 8

## Pole options

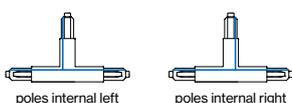

## TRACK 3-phase/3-phase + DALI-2-bus



### TRACK 240V-16A

L (mm)	ORDER CODE
2000	186-012213
3000	186-012313
4000	186-012413

end cap 186-022011

end feed left 186-022313  
 end feed right 186-022413  
 middle feed 186-021323

### CONNECTORS 240V-16A

**TYPE** **ORDER CODE**  
 linear connector 186-021113

I-connector 186-022123


L-connector right 186-022133  
 L-connector left 186-022233

T-connector right (poles internal) 186-022143  
 T-connector left (poles internal) 186-022243  
 T-connector right (poles external) 186-022173  
 T-connector left (poles external) 186-022273

X-connector 186-022153

### MOUNTING ACCESSORIES

**TYPE** **ORDER CODE**  
 clip 186-0225110  
 cutting tool 186-0219110

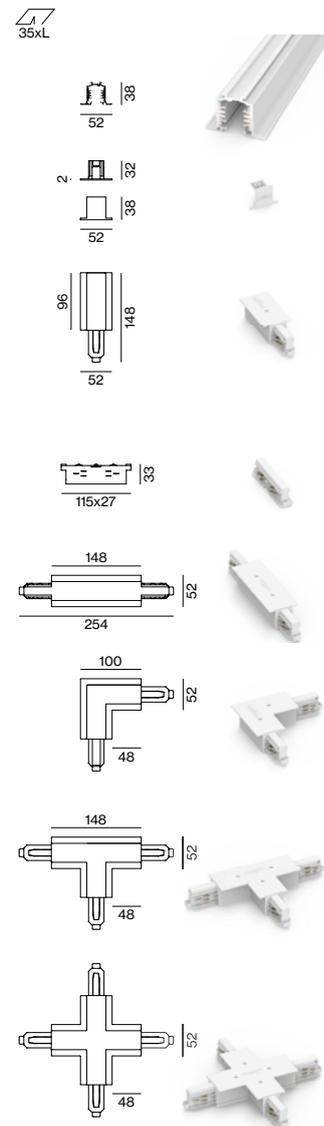

# TRACK

## surface/suspended

### Order options

#### CONTROL


non DIM

DALI-2

#### MATERIAL COLOUR

○ pure white RAL 9010	7
● white aluminium RAL 9006	6
● jet black RAL 9005	8

### Pole options



### TRACK 3-phase/3-phase + DALI-2-bus



#### TRACK 240V-16A

L (mm)	ORDER CODE
1000	186-011123
2000	186-011223
3000	186-011323
4000	186-011423

end cap      186-021011

end feed left      186-021313

end feed right      186-021413

middle feed\*      186-021323

\*only available in white and black

#### CONNECTORS 240V-16A

TYPE      ORDER CODE  
linear connector      186-021113

I-connector      186-021123

L-connector right      186-021133

L-connector left      186-021233

T-connector right (poles internal)      186-021143

T-connector left (poles internal)      186-021243

T-connector right (poles external)      186-021173

T-connector left (poles external)      186-021273

X-connector      186-021153

adjustable corner connector      186-021163

#### MOUNTING ACCESSORIES

TYPE      ORDER CODE  
ceiling clip      186-021511

pendant clip cable      186-021521

pendant clip rod      186-021541

joiner piece cable      186-021531

joiner piece rod      186-021551

cutting tool      186-0219110

#### SUSPENSION KIT

TYPE      ORDER CODE  
pendant 1000      186-021611

cable 1500      186-0217110

cable 3000      186-0217210

cable 6200      186-0217310



# TRACK high

## surface/suspended

### Order options

#### CONTROL

non DIM

DALI-2

#### MATERIAL COLOUR

○ pure white RAL 9010 7



● jet black RAL 9005 8

### Options on request

#### LIGHT OPTIC COVER

inset indirect

### Pole options

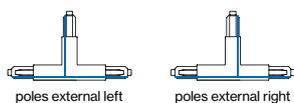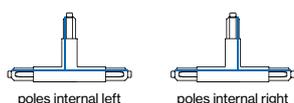

### TRACK high 3-phase/3-phase + DALI-2-bus



#### TRACK 240V-16A

L (mm)	ORDER CODE
1000	186-016113
2000	186-016213
3000	186-016313
4000	186-016413

end cap 186-026011

end feed left 186-026313

end feed right 186-026413

middle feed 186-021323

#### CONNECTORS 240V-16A

**TYPE**  
linear connector 186-026113

L-connector 186-026123

L-connector right 186-026133

L-connector left 186-026233

T-connector right (poles internal) 186-026143

T-connector left (poles internal) 186-026243

T-connector right (poles external) 186-026173

T-connector left (poles external) 186-026273

X-connector 186-026153

#### MOUNTING ACCESSORIES

**TYPE**  
pendant clip cable 186-0265210  
pendant sheet metal clip 186-0215220  
pendant clip rod 186-0265410

joiner piece cable 186-0265310

joiner piece rod 186-0265510

cutting tool 186-0219110


#### SUSPENSION KIT

**TYPE**  
pendant 1000 186-0216110

cable 1500 186-0217110

cable 3000 186-0217210

cable 6200 186-0217310

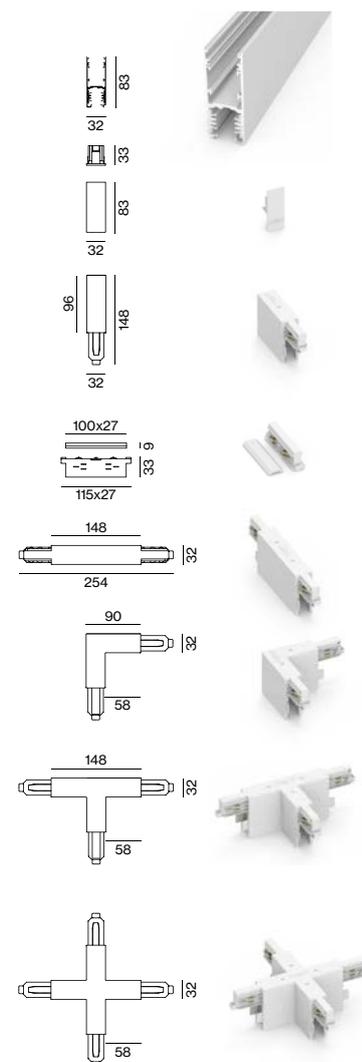

# TRACK round surface/suspended

## Order options

### CONTROL

non DIM \_\_\_\_\_  
DALI-2 \_\_\_\_\_

### MATERIAL COLOUR

○ pure white RAL 9010  7  
● jet black RAL 9005  8

## Options on request

### CONNECTOR

T-connector \_\_\_\_\_  
X-connector \_\_\_\_\_

## TRACK round 3-phase/3-phase + DALI-2-bus




### TRACK 240V-16A

L (mm)	ORDER CODE
1000	186-015113 <input checked="" type="checkbox"/>
2000	186-015213 <input checked="" type="checkbox"/>
3000	186-015313 <input checked="" type="checkbox"/>
4000	186-015413 <input checked="" type="checkbox"/>




### TRACK CURVE 240V-16A

TYPE	ORDER CODE
R 500 90° left	186-015853 <input checked="" type="checkbox"/>
R 500 90° right	186-015863 <input checked="" type="checkbox"/>

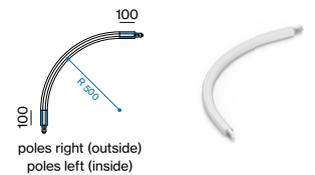

end cap \_\_\_\_\_ 186-025011




end feed left \_\_\_\_\_ 186-025313   
end feed right \_\_\_\_\_ 186-025413   
middle feed \_\_\_\_\_ 186-021323



### CONNECTORS 240V-16A

TYPE	ORDER CODE
linear connector	186-021113 <input checked="" type="checkbox"/>
L-connector right	186-025133 <input checked="" type="checkbox"/>
L-connector left	186-025233 <input checked="" type="checkbox"/>



### MOUNTING ACCESSORIES

TYPE	ORDER CODE
pendant clip cable	186-025521 <input checked="" type="checkbox"/>
pendant clip rod	186-025541 <input checked="" type="checkbox"/>
joiner piece cable	186-025531 <input checked="" type="checkbox"/>
joiner piece rod	186-025551 <input checked="" type="checkbox"/>
cutting tool	186-0219110

### SUSPENSION KIT

TYPE	ORDER CODE
pendant 1000	186-021611 <input checked="" type="checkbox"/>
cable 1500	186-0217110
cable 3000	186-0217210
cable 6200	186-0217310