



MOVE IT 45 system

trimless / surface / suspended


EN Extruded aluminium profile with 45mm width groove; for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional with indirect light component for additional accentuation of the ceiling; for lighting systems, 90° angle connectors for flexible system design; node connectors, up to 4 profile connection options; with power track profile for take off of supply voltage and DALI signal; surf. anod. or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking; sound absorbing accessories available

FR Profil extrudé en alu avec 45mm de largeur de joint ; montage sans bord dans des plafonds en placoplâtre (murales ou au plafond) de 12,5mm ; ou montage en surface au mur ou au plafond ou pour montage suspendu (susp. par câble, réglage hauteur sans outil, câble d'alim. noir inclus) ; en option avec composants lum. indirects pour une accentuation suppl. du plafond ; pour systèmes d'éclairage, équerres de raccordement 90° pour structure de système flexible ; jonctions avec jusqu'à 4 options de raccordement ; avec profil de rail pour la captation de la tension d'alim. et signal DALI; surf. anod. ou thermolaquée ; montage flex. et sans outil des éléments avec support magnétique + verrouillage ; accessoires avec propriétés d'absorption acoustique


Quickinfo

3000K
CRI ≥ 90, 2 SDCM
up to 118lm/W
L80 @ 50 000h
non DIM, DALI-2


Types




connector



Colours



custom cut on
building site



acoustic
elements

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005






Options on request

CONNECTOR

T-connector
X-connector

INSTALLATION TRACK

acoustic soft ceilings



MOVE IT 45 trimless



INSTALLATION TRACK

L (mm)

617	channel
1217	channel
2417	channel
3622	channel
cust. cut	channel (non DIM)
cust. cut	channel (DALI-2)
692x648	channel corner* 90°
661x661	channel corner* ceiling to wall 90°

*incl. electrical connector set

ORDER CODE

050-72320	8
050-72340	8
050-72380	8
050-72390	8
E83551	8
E83521	8
050-72310	8
050-72311	8

Accessories

END CAPS

TYPE

end caps (pair)

ORDER CODE

050-7230008

BLIND COVER

L (mm)

1217
2417
3622
custom cut

blind cover can be shortened as desired

ORDER CODE

050-7034008
050-7038008
050-7039008
E83500

CONNECTOR SET

TYPE

linear connector (non DIM, DALI-2)
linear connector flexible
mechanical linear connector (pair)

ORDER CODE

050-2031130
050-203210
050-2011110

POWER FEEDER UNIT

TYPE

non DIM 2×2,5mm ²
DALI-2 2×2,5 + 2×0,5mm ²

cable length 500 mm

ORDER CODE

050-2020110
050-2020130

Electrical accessories

see following pages

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	G
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX / END CAP

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	P
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

NODE CONNECTOR

MOUNTING TYPE


surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X

MATERIAL COLOUR

CABLE SUSPENSION

chrome	0
black	8



MOVE IT 45 surface / suspended



INSTALLATION TRACK

L (mm)

620	channel
1220	channel
2420	channel
3625	channel
cust. cut	channel (non DIM)
cust. cut	channel (DALI-2)
653x609	channel corner* 90°
666x666	channel corner* ceiling to wall 90°

*incl. electrical connector set

ORDER CODE

050-73320	050-73320
050-73340	050-73340
050-73380	050-73380
050-73390	050-73390
E83561	E83561
E83531	E83531
050-73310	050-73310
050-73311	050-73311

Accessories

END CAPS

TYPE

end caps (pair)

ORDER CODE

050-733000

BLIND COVER

L (mm)

1217
2417
3622
custom cut

blind cover can be shortened as desired

ORDER CODE

050-7034008
050-7038008
050-7039008
E83500

FLEX NODE CONNECTOR

TYPE

FLEX NODE surface mounted
FLEX NODE surface mounted incl. feeder
FLEX NODE cable suspension 1500 mm
FLEX NODE cable susp. 1500 mm incl. feeder
NODE end cap* incl. electrical connector

ORDER CODE

050-203333
050-202243
050-20331
050-20222
050-733010

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE

mechanical linear conn. incl. 1500 mm cable susp.
mechanical linear connector surface
mechanical & electrical linear connector

ORDER CODE

050-201131
050-2011410
050-2031230

POWER FEEDER UNIT

TYPE

non DIM 2x2,5 mm ²	2000
DALI-2 2x2,5 + 2x0,5 mm ²	2000
non DIM 2x2,5 mm ²	4000
DALI-2 2x2,5 + 2x0,5 mm ²	4000

L (mm)

ORDER CODE

050-2022110
050-2022130
050-2024110
050-2024130

CEILING FASTENER / CABLE SUSPENSION / CANOPY

TYPE

ceiling fastener	67
cable suspension*	1500
canopy	

L (mm)

ORDER CODE

050-204121
005-215211
005-231171

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages

Order options

COLOUR TEMPERATURE

3000K

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX/END CAP

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

NODE CONNECTOR

MOUNTING TYPE

surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X

MATERIAL COLOUR

CABLE SUSPENSION

chrome	0
black	8

Options on request


COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

2700 K
4000 K
tunable white 2700–6500 K*

*DALI-2 DT8



MOVE IT 45 suspended indirect



INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	0 5 0 - 7 4 3 2 5 ▢
1220	15.3 W	1810 lm	0 5 0 - 7 4 3 4 5 ▢
2420	33 W	3890 lm	0 5 0 - 7 4 3 8 5 ▢
3625	51 W	6000 lm	0 5 0 - 7 4 3 9 5 ▢
653x609 corner*	13.1 W	1550 lm	0 5 0 - 7 4 3 1 0 ▢

incl. chrome cable suspension for L=1220/2420/3625 mm

no custom cut on building side; *incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	0 5 0 - 7 3 3 0 0 ▢

BLIND COVER

L (mm)	ORDER CODE
1217	0 5 0 - 7 0 3 4 0 0 8
2417	0 5 0 - 7 0 3 8 0 0 8
3622	0 5 0 - 7 0 3 9 0 0 8
custom cut	E 8 3 5 0 0 · · · · 8 B

blind cover can be shortened as desired

FLEX NODE CONNECTOR

TYPE	ORDER CODE
FLEX NODE cable suspension 1500 mm	0 5 0 - 2 0 3 3 1 ▢
FLEX NODE cable susp. 1500 mm incl. feeder	0 5 0 - 2 0 2 2 2 ▢
NODE end cap* incl. electrical connector	0 5 0 - 7 3 3 0 1 0 ▢

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	0 5 0 - 2 0 1 1 3 1 ▢
mechanical & electrical linear connector	0 5 0 - 2 0 3 1 2 3 0


POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2×2,5 mm ²	2000	0 5 0 - 2 0 2 2 1 1 0
DALI-2 2×2,5 + 2×0,5 mm ²	2000	0 5 0 - 2 0 2 2 1 3 0
non DIM 2×2,5 mm ²	4000	0 5 0 - 2 0 2 4 1 1 0
DALI-2 2×2,5 + 2×0,5 mm ²	4000	0 5 0 - 2 0 2 4 1 3 0

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	0 0 5 - 2 1 5 2 1 1 ▢
canopy		0 0 5 - 2 3 1 1 7 1 ▢

*use every 1200 mm



Electrical accessories

see following pages

Acoustic elements

see following pages

LUMINOUS FLUX value calculated for
3000 K, CRI ≥ 90, colour white/black






Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



Electrical accessories

POWER SUPPLY INTRACK supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
150 W □ PC II η 92 %		intrack	453-43-48	050-2071238
250 W □ PC II η 93 %		intrack	453-43-48	050-2071338

ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY SURFACE supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		surface	305-144-54	050-20551
100 W □ PC II η 92 %		surface	455-104-40	050-20554
150 W □ PC II η 92 %		surface	455-104-40	050-20552
250 W □ PC II η 93 %		surface	455-104-40	050-20555
320 W ⊕ PC I η 94 %		surface	305-144-54	050-20553

ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		external	163-43-32	002-62133
100 W □ PC II η 92 %		external	350-30-18	002-62134
150 W □ PC II η 92 %		external	350-30-18	002-62135
250 W □ PC II η 93 %		external	400-40-22	002-62139
320 W ⊕ PC I η 94 %		external	252-90-44	002-60320

ENEC approved

DIN RAIL POWER SUPPLY PRO 48 V

220-240 V | 50-60 Hz | ⊕ PC I | MTBF @ 55° ambient temperature
cascadable max. 5 devices (240 W) or 3 devices (480 W)

TYPE	EFFICIENCY / MTBF	W-H-D (mm)	ORDER CODE
240 W η 92 % / > 400.000 h		60-125-100	005-6220110
480 W η 93 % / > 350.000 h		120-125-100	005-6220210

DALI-2 SELV DEVICE

TYPE	L-W-H (mm)	ORDER CODE
control unit	213-37-25	050-2061130

necessary to create DALI-2 SELV signal; DALI power supply integrated

DALI-2 SENSOR

TYPE	L-W-H (mm)	ORDER CODE
ESSENTIAL sensor (brightness & presence)	43-43-48	050-2063378
SENSE sensor (brightness, presence, temperature, sound pressure, humidity, CO ₂)	43-43-48	050-2063278

WIRELESS TO DALI-2 CONTROL DEVICE

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2065230

WIRELESS TO DALI-2 REPEATER

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2066230

DALI-2 SELV device required

MIDDLE FEED

TYPE	ORDER CODE
DALI-2 2×2,5 + 2×0,5 mm ² cable length 2000 mm	050-2038130



LIGHT INSET 45

linear inset 45

Quickinfo

3000K, 4000K, TW
CRI ≥ 90, 3 SDCM
DALI-2

L85 @ 50 000 h
opal/opal jut-out up to 99lm/W
microprism. (≤19) up to 77lm/W
microprism. (≤22) up to 78lm/W

L80 @ 50 000 h
UGR ≤ 19 / 65° ≤ 1500 cd/m²
L1 up to 106lm/W
L2 up to 97lm/W
L4 up to 104lm/W
L6 up to 90lm/W

L90 @ 50 000 h
UGR ≤ 19 / 65° ≤ 1500 cd/m²
L10 office up to 102lm/W
L24 office up to 120lm/W

Types

L1	L2	L4	L6	
				42
48	81	156	231	



L10 office	opal	
		42
381	605 1205	

L24 office	
	42
906	


Colour



Light distributions



tunable white
2700–5000K



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE	5
3000K	6
4000K	D
tunable white 2700–5000 K*	
*DALI-2 DT8	


CONTROL
DALI-2

MATERIAL COLOUR
● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX
CRI ≥ 98 XPECTRUM

CONTROL
Zigbee 3.0





LIGHT INSET 45




OPAL HIGH PERFORMANCE

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
14.8W	3000K	1100lm	605	0 5 0 - 3 2 1 2 :: 38H
	4000K	1210lm		
29.6W	3000K	2190lm	1205	0 5 0 - 3 2 1 4 :: 38H
	4000K	2420lm		




OPAL JUT-OUT

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
14.8W	3000K	1160lm	605	0 5 0 - 3 2 1 2 :: 38J
	4000K	1270lm		
29.6W	3000K	2310lm	1205	0 5 0 - 3 2 1 4 :: 38J
	4000K	2550lm		



MICROPRISMATIC UGR ≤ 19

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.2W	3000K	636lm	605	0 5 0 - 3 2 1 2 :: 38P
	4000K	701lm		
18.3W	3000K	1270lm	1205	0 5 0 - 3 2 1 4 :: 38P
	4000K	400lm		



MICROPRISMATIC UGR ≤ 22

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
23W	3000K	1640lm	605	0 5 0 - 3 2 4 2 :: 38P
	4000K	1750lm		
45W	3000K	3280lm	1205	0 5 0 - 3 2 4 4 :: 38P
	4000K	3500lm		

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

Order options

COLOUR TEMPERATURE

3000 K	5
4000 K	6
tunable white 2700–5000 K*	D

*DALI-2 DT8

CONTROL

DALI-2

LIGHT OPTIC

medium square (UGR ≤ 10)	E
flood square (UGR ≤ 19)	F

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

MATERIAL COLOUR

● jet black RAL 9005

Options on request


LIGHT OPTIC

spot round
narrow medium round
medium round (UGR ≤ 19)
medium square (UGR ≤ 10)
flood round (UGR ≤ 19)
flood square (UGR ≤ 19)
wide flood round
wide flood square
rectangular
wallwasher
wallwasher floor

LIGHT OPTIC COLOUR

gold reflector

Planning information




The icons of the light optics are shown in the reflected ceiling plan (RCP) view.


INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black, reflector chrome

L1 LIGHT INSET



FLOOR



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.4 W	3000 K	up to 338 lm	090-9L1::3▲B■01
	4000 K	up to 361 lm	


choose one light optic ▲ from the options on the left depending on your room needs

L2 LIGHT INSET



WALL

2 × wallwasher



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.9 W	3000 K	590 lm	090-9L2::3AB001
	4000 K	633 lm	

WALL FLOOR

2 × wallwasher floor



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.9 W	3000 K	620 lm	090-9L2::3WB■01
	4000 K	662 lm	


CORRIDOR

2 × rectangular




INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.9 W	3000 K	624 lm	090-9L2::3RB■01
	4000 K	667 lm	

L4 LIGHT INSET



FLOOR/CORRIDOR



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	3000 K	up to 1350 lm	090-9L4::3▲B■01
	4000 K	up to 1450 lm	

choose one light optic ▲ from the options on the left depending on your room needs

WALL

4 × wallwasher



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	3000 K	1180 lm	090-9L4::3AB001
	4000 K	1270 lm	

WALL

2 × wallwasher 180° + 2 × wallwasher



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	3000 K	1180 lm	090-9L4::3AB002
	4000 K	1270 lm	

WALL FLOOR

4 × wallwasher floor



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	3000 K	1240 lm	090-9L4::3WB■01
	4000 K	1320 lm	

WALL FLOOR

2 × wallwasher floor 180° + 2 × wallwasher floor



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	3000 K	1240 lm	090-9L4::3WB■02
	4000 K	1320 lm	

Order options

COLOUR TEMPERATURE

3000 K	5
4000 K	6
tunable white 2700–6500 K*	

*DALI-2 DT8; L6 light inset 2700–5000 K

CONTROL

DALI-2	
--------	--

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

MATERIAL COLOUR

● jet black RAL 9005	
----------------------	--

Options on request

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM*


*only for L24 light inset

LIGHT OPTIC

spot round	
narrow medium round	
medium round (UGR ≤ 19)	
medium square (UGR ≤ 10)	
flood round (UGR ≤ 19)	
flood square (UGR ≤ 19)	
wide flood round	
wide flood square	
rectangular	
wallwasher	
wallwasher floor	

LIGHT OPTIC COLOUR

gold reflector	
not available for L24 light inset	



L6 LIGHT INSET



WALL

6 × wallwasher

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
21 W	3000 K	1780 lm	090-9 L 6 :: 3 A B 0 0 1
15.1 W	4000 K	1900 lm	
	TW 2700–5000 K	1120 lm	090-9 L 6 D 3 A B 0 0 1



L10 LIGHT INSET



OFFICE UGR ≤ 19

10 × medium square

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
30 W	3000 K	2840 lm	050-3 2 1 1 :: 3 8 R
22.2 W	4000 K	3060 lm	
	TW 2700–6500 K	2790 lm	050-3 2 1 1 D 3 8 R



L24 LIGHT INSET



OFFICE UGR ≤ 19

24 × medium square

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
21 W	3000 K	2350 lm	050-3 2 1 3 :: 3 8 R
	4000 K	2510 lm	

OFFICE UGR ≤ 19

24 × medium square

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
21 W	3000 K	2350 lm	050-3 2 1 3 :: 3 8 R
	4000 K	2510 lm	
20.2 W	TW 2700–6500 K	2800 lm	050-3 2 1 3 D 3 8 R

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black, reflector chrome



JUST 45/55

spotlight inset 45

Quickinfo


2700 K, 3000 K, 4000 K, CWD, TW
CRI ≥ 90, 2 SDCM

non DIM, DALI-2

L80 @ 50 000 h
JUST 45 up to 72lm/W

L90 @ 50 000 h
JUST 55 up to 88lm/W

Types



Colours



Light distributions


JUST 45



JUST 55



ARY rod




ARY shade



TULA



PAL



TW 1800–3000 K
or 2700–6500 K



CWD
2000–3000 K

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
colour warm dim. 2000–3000 K*	
tunable white 1800–3000 K**	
tunable white 2700–6500 K**	

*DALI-2 **DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR



○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

BEAM ANGLE JUST 45

medium 23°	M
flood 44°	F

BEAM ANGLE JUST 55

spot 16°	S
medium 28°	M
flood 37°	F



JUST 45



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
6.1 W super spot 8°	297 lm	050-0131333V
11 W	788 lm	050-0131333V
12 W CWD 2000–3000 K	430 lm	050-0131E33
11 W TW 1800–3000 K	555 lm	050-0131L33
11 W TW 2700–6500 K	683 lm	050-0131D33

JUST 55



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
16.4 W	1430 lm	050-0143333
25.4 W	2010 lm	050-0142333

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42.3	007-1965188
JUST 55	50.3	007-1965598

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, lens flood 2700 K -5%, 4000 K +5%

MOVE IT 45 system

acoustic elements

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; different versions: choice of square or rectangular design; high quality visual and tactile surface with embossed pattern; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools

FR Élément acoustique en feutre PET recyclé, autoportant, haute qualité, doué de propriétés insonorisantes ; diverses variantes : forme au choix carrée ou rectangulaire ; surface de haute qualité optique et tactile avec motif gaufré ; inclusions de fibres étrangères possibles ; absorption du bruit direct et du bruit réfléchi par le plafond ; pour de meilleures performances acoustiques ; à insérer dans le système suspendu MOVE IT 45 composé de jonctions et profils disponibles ; possibilité d'insertion ultérieure dans un MOVE IT suspended system déjà en place ; montage sans outil


Quickinfo

PET felt

♻️ from recycled material

🔥 available as B-s1, d0


Types



Colours



easy
mounting




sound absorption
by recycled PET

Order options

MATERIAL COLOUR		
☐ white		W
☐ marble grey		D
☐ black		L

Options on request

MATERIAL COLOUR	
painting in custom colour	
DIMENSIONS	
cut in custom dimensions	

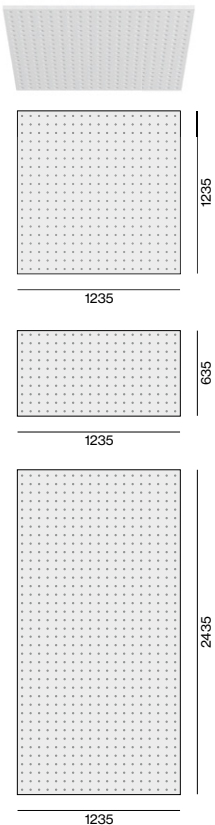

MOVE IT 45 acoustic suspended



ACOUSTIC ELEMENT

TYPE	L-W-H (mm)	ORDER CODE
square grid inlay	1235·1235·25	0 5 0 - 2 3 1 1 2 1 ☒
half grid inlay	635·1235·25	0 5 0 - 2 3 1 2 2 1 ☒
double grid inlay	2435·1235·25	0 5 0 - 2 3 1 3 2 1 ☒

mounting only in MOVE IT 45 system with NODE connector + track 1220 mm, 620 mm or 2420 mm

ACOUSTIC EXAMPLES

