

ARY adjustable rod suspended

MOVE IT 25 / 25 S / 45


050-0531D37M



Projet / Type

Notes

Quantité / Date

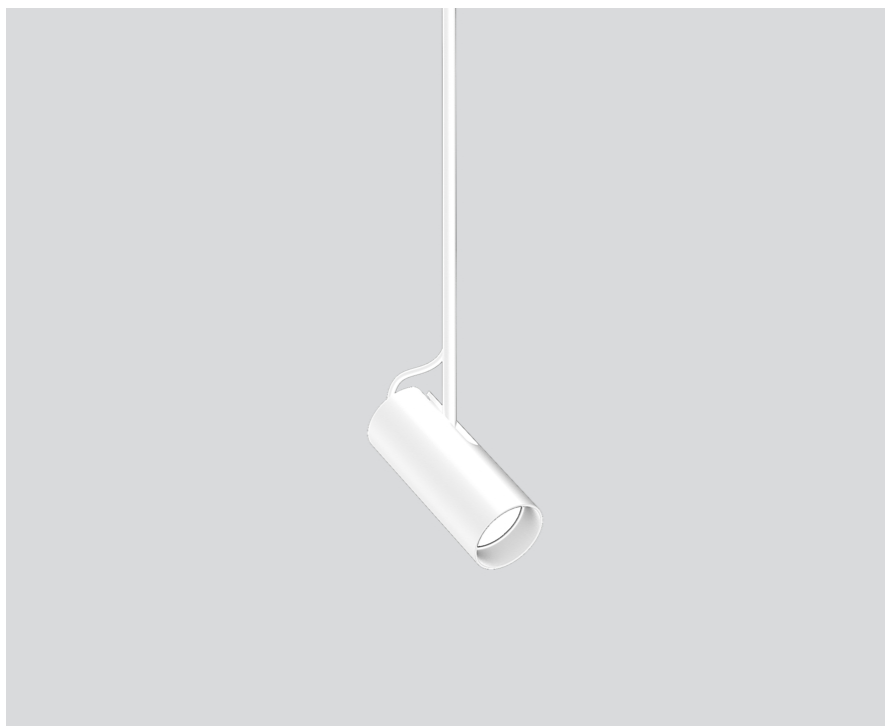

Général

Plafond | Rail Suspendu

inclinaison max 90°

rotation 265°

blanc | RAL 9016 ¹

IP20

269 lm

insert optique 67 lm/W ²

LED

tunable white | 2200 K - 4000 K

CRI ≥ 90

L95 / 50000 h

MacAdam initial ≤ 3 SDCM

MR 0.4 | MDER 0.37

Optique

medium | angle de faisceau 21°

PstLM ≤ 1.0 ³ | SVM ≤ 0.4 ³

Electrique

DALI-2 DT8 | 1 DALI Addr.

CP3 | 48 V

luminaire 5.4 W

insert optique 4.0 W

Physique

barre 1500 mm


diamètre 47 mm | hauteur 110 mm

0.45 kg

¹ Code RAL ² y compris la prise en compte des pertes optiques.

³ Valeur du produit contenant à pleine charge (non atténué)


Répartition de la lumière



medium 21°

h (m)	EO° (lx)	ø (m)
1	1370	0.38
2	340	0.76
3	150	1.14
4	90	1.52
5	50	1.90

Dessin de fabrication



Notice de montage



Calculateur d'éclairage

