




Quickinfo

2700 K, 3000 K
 CRI $\geq$ 90 / 2 SDCM, 3 SDCM
 jusqu'à 95 lm/W
 L90 / 50000 h
 Casambi, DALI-2, non DIM
 IP20

Types



Couleur



cache-piton




Répartition de la lumière




TULA suspended

EN Decorative suspended luminaire in aluminium; surface polished chrome or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy, either recessed or surface mounted version; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory


FR Luminaire décoratif à suspension en aluminium ; surface chrome poli ou surface thermolaquée ; suspension par câble, câble d'alimentation inclus (noir ou blanche) ; recoupable à volonté ; bon anti-éblouissement grâce aux points lumineux en retrait ; incl. optique lentille de grande qualité ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; convertisseur inclus dans le cache-piton, au choix en variante encastrée ou en saillie ; anneaux de montage au plafond pour un positionnement multiple des luminaires dans la pièce disponibles comme accessoires



free positioning
by ring and
hook



track version
available



TULA nano suspended




MEDIUM CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.9 W, 500 mA	2700 K	790 lm	89 lm/W	0 4 9 - 5 H 1 0 4 1 M
	3000 K	816 lm	92 lm/W	0 4 9 - 5 H 1 0 5 1 M

FLOOD CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.9 W, 500 mA	2700 K	762 lm	86 lm/W	0 4 9 - 5 H 1 0 4 1 F
	3000 K	787 lm	89 lm/W	0 4 9 - 5 H 1 0 5 1 F



TULA micro suspended



MEDIUM CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.4 W, 500 mA	2700 K	648 lm	77 lm/W	0 4 9 - 5 H 1 5 4 1 M
	3000 K	746 lm	88 lm/W	0 4 9 - 5 H 1 5 5 1 M

FLOOD CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
8.4 W, 500 mA	2700 K	694 lm	82 lm/W	0 4 9 - 5 H 1 5 4 1 F
	3000 K	798 lm	95 lm/W	0 4 9 - 5 H 1 5 5 1 F

Electrical mounting accessories (required)



CANOPY for cable suspension 500 mA, PC2, 198-264 V AC

TYPE	COLOUR	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W non DIM	traffic white	η 84 %	115:29	0 0 5 - 2 6 0 2 1 1 7
13 W non DIM	jet black	η 84 %	115:29	0 0 5 - 2 6 0 2 1 1 8
10 W DALI-2	jet black	η 85 %	115:29	0 0 5 - 2 6 0 2 1 3 8
10 W Casambi	jet black	η 83 %	115:29	0 0 5 - 2 6 0 2 1 9 8

incl. power supply

CANOPY for cable suspension 500 mA, 10 W, PC2, 198-264 V AC, traffic white

TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
DALI-2	η 85 %	115:29	0 0 5 - 2 6 0 2 1 3 7
Casambi	η 83 %	115:29	0 0 5 - 2 6 0 2 1 9 7

incl. power supply

Mounting accessories (required)




MOUNTING SET trimless

TYPE	COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
for installation in plasterboard ceilings	traffic white	9-25 mm	75:48	0 0 5 - 3 5 1 1 0 1 7

excl. power supply

Order options

HEIGHT	H	COLOUR	
300 mm	5	chrome	4
500 mm	7	traffic white RAL 9016	7
		jet black RAL 9005	8
		special colours	X

**MOUNTING SET with trim** for installation in ceilings, 2-25 mm

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 1 0 1 7
jet black	77-49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply

Mounting accessories (optional)**HOOK ceiling mounted**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	18-58	0 5 0 - 0 5 1 0 3 1 7
jet black	18-58	0 5 0 - 0 5 1 0 3 1 8

**RING ceiling mounted**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	50-88	0 5 0 - 0 5 1 0 2 1 7
jet black	50-88	0 5 0 - 0 5 1 0 2 1 8

**SPECIAL MOUNTING TOOL**

TYPE	Ø-H (mm)	ORDER CODE
for ARY MOVE IN 45 NOBA TULA	100-107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless


Electrical accessories (required)**POWER SUPPLY** 500 mA, 10 W, PC2, 198-264 V AC

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
non DIM	η 80 %	65-39-20	0 0 2 - 9 0 7 3 2
DALI-2	η 82 %	147-33-23	0 0 2 - 9 0 7 3 3

Electrical accessories (optional)**DIN RAIL LED DRIVER**

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 - 1050 mA settable const. current | 2 × 42W | 48V DC | U OUT 10-40V

**DIN RAIL POWER SUPPLY**

L-W-H (mm)	ORDER CODE
72-90-63	0 0 5 - 6 5 2 0 2 1 0

220-240 V AC | 160 W | 48V DC constant voltage

Optical accessories (optional)**HONEYCOMB LOUVER**

TYPE	COLOUR	Ø-H (mm)	ORDER CODE
for BO 45 JUST 45 MOVE IN 45 TARO 45 TULA micro	jet black	42-3	0 0 7 - 1 9 6 5 1 8 8

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
for BO 45 MOVE IN 45 TULA micro	42-3	0 0 7 - 1 9 6 5 8 8 0

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
for ARY BO 45 MOVE IN 45 TULA micro	42:3	0 0 7 - 1 9 6 5 9 8 0

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
for ARY BO 45 MOVE IN 45 TULA micro	42:3	0 0 7 - 1 9 6 5 7 8 0

Private Residence, Denmark

Danemark

Architecte

LINK Architecture

Lighting Design

anker & co

Photographe


Kris Dekeijser



Produits utilisés




TULA suspended



MOVE IT 25 trimless system



SPOT LINE MOVE IT 25

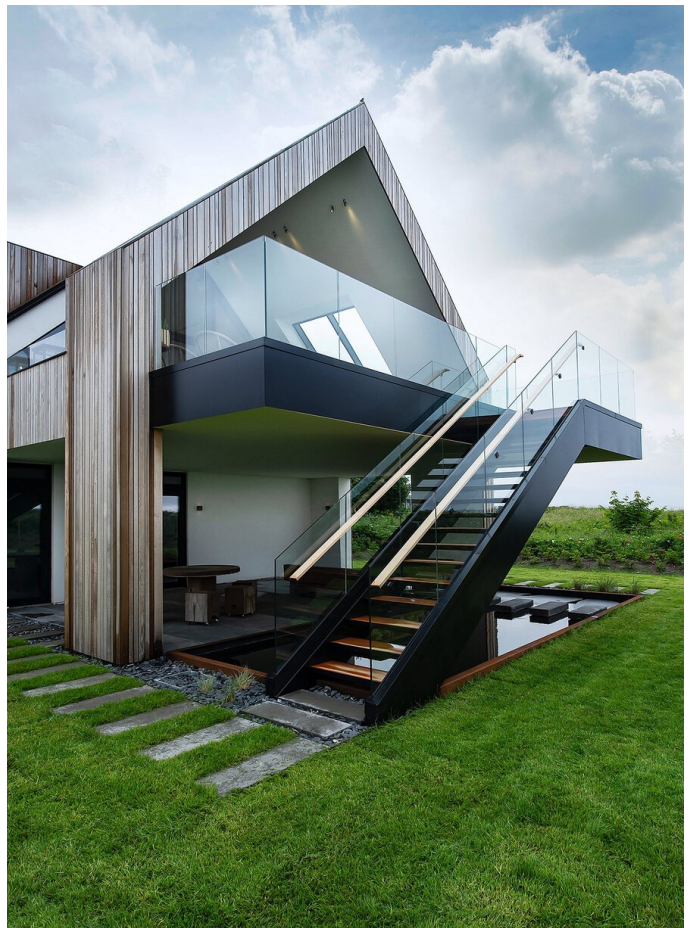



Trippenhuis

Pays-Bas

Architecte
Arpalight


Photographe
Rene de Wit Max Hart
Nibbrig



Produits utilisés




SASSO 60 round
semi-recessed



BO 32 / 45 / 55
intrack



TULA suspended



MOVE IT 25 trimless
system



BO 32 / 45 / 55
intrack 1 | 2 | 3 lamps



SASSO 60 round
ceiling



