


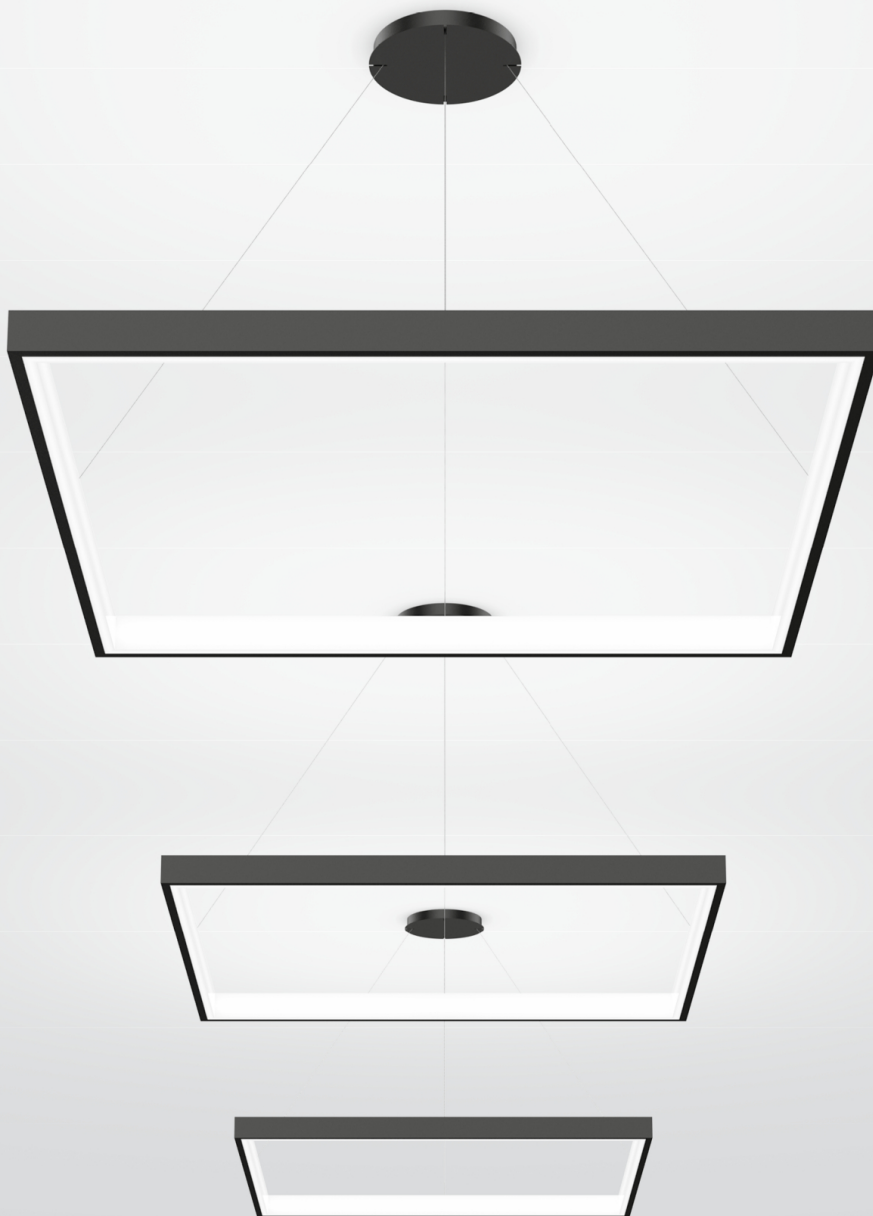

INO square

suspended


EN Square aluminium luminaire housing; surface powder coated; pendant fitting with cable suspension; height adjustment without tools; incl. transparent feed; electronic operating unit installed in the canopy; completely homogeneously illuminated, satinised PMMA cover; inwards facing emission characteristics; direct/indirect illumination characteristic for additional emphasis of the ceiling and more visual comfort; energy-efficient LEDs with very good colour rendering; canopy with 2 cable openings and plug-in terminal for through wiring

FR Corps de luminaire carré en aluminium ; surface thermolaquée ; suspension par câble ; réglage en hauteur sans outil ; incl. conduit d'alimentation transparent ; disp. électronique d'alimentation intégré au cache-piton ; cache PMMA, à éclairage parfaitement homogène, satiné ; caractéristique de rayonnement orientée vers l'intérieur ; caractéristique de rayonnement directe/indirecte pour mettre le plafond en valeur et un meilleur confort de vue ; LED économes en énergie à restitution de couleur élevée ; cache-piton avec 2 orifices de câblage et cliP de fixation pour câblage continu

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM
jusqu'à ↓ 4,770 lm / ↑ 4,760 lm
jusqu'à 122 lm/W
L90 / 50000 h
DALI-2
High Performance Opal
IP20

Types



Couleur



Répartition de la lumière




DiiA® standards
251, 252, 253





direct / indirect
illumination



tunable white
2700 – 6500 K
(optional)



CRI ≥ 98
XPECTRUM
(optional)





INO 750 square suspended



OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
39.0 W	2700 K	↓2170/↑2160 lm	111 lm/W	0 3 4 - 4 4 4 2 4 3 ☒ H
	3000 K	↓2280/↑2270 lm	117 lm/W	0 3 4 - 4 4 4 2 5 3 ☒ H
	4000 K	↓2390/↑2380 lm	122 lm/W	0 3 4 - 4 4 4 2 6 3 ☒ H




INO 1000 square suspended



OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
52.0 W	2700 K	↓2890/↑2890 lm	111 lm/W	0 3 4 - 4 4 4 3 4 3 ☒ H
	3000 K	↓3040/↑3030 lm	117 lm/W	0 3 4 - 4 4 4 3 5 3 ☒ H
	4000 K	↓3180/↑3170 lm	122 lm/W	0 3 4 - 4 4 4 3 6 3 ☒ H



INO 1250 square suspended





OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
65.0 W	2700 K	↓3610/↑3610 lm	111 lm/W	0 3 4 - 4 4 4 4 4 3 ☒ H
	3000 K	↓3790/↑3790 lm	117 lm/W	0 3 4 - 4 4 4 4 5 3 ☒ H
	4000 K	↓3970/↑3970 lm	122 lm/W	0 3 4 - 4 4 4 4 6 3 ☒ H

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
white aluminium RAL 9006	G
special colours	X



INO 1500 square suspended



OPAL CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
79.0 W	2700 K	↓4330/↑4330 lm	110 lm/W	0 3 4 - 4 4 4 5 4 3  H
	3000 K	↓4550/↑4550 lm	115 lm/W	0 3 4 - 4 4 4 5 5 3  H
	4000 K	↓4770/↑4760 lm	121 lm/W	0 3 4 - 4 4 4 5 6 3  H

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
white aluminium RAL 9006	G
special colours	X

Granitlab Coworking

Autriche

Architecte

GHT-Plan GmbH

Lighting Design

GHT-Plan GmbH, AREA

C.I. Design GmbH

Photographe

Kurt Kuball




Produits utilisés



UNICO Q1 / Q4 basic ceiling



BETO suspended



INO square suspended

