



reddot winner 2024



Quickinfo

DALI-2

Types

recessed
trimless



Colours



MOVE IT PRO system

trimless

EN Extruded aluminium profile with 45 mm width and 55 mm height; for trimless installation in 12.5 mm plasterboard ceilings; designed for continuous lighting systems; with integrated 3-phase copper conductors + 4 emergency lighting copper conductors (2 emergency lighting circuits) + 2 DALI copper conductors for take off of supply voltage, emergency lighting power supply and DALI signal; customcut possible; surface powder coated; insets, incl. high power adapter + converter can be installed flexibly and without tools; light inserts with different patterns of light distribution, emergency light inserts (escape sign and emergency luminaires) for operation on a central battery system and sensor inserts can be integrated

FR Profilé d'aluminium extrudé, 45 mm de large et 55 mm de haut ; montage sans bord dans plaf. en placopl. de 12,5 mm ; conçu pour les systèmes d'éclairage continu ; avec conducteurs en cuivre triphasés intégrés + 4 conducteurs en cuivre pour l'éclairage de secours (2 circuits d'éclairage de secours) + 2 conducteurs en cuivre DALI pour prise en charge de la tension d'alimentation, de l'alimentation électrique d'éclairage de secours et du signal DALI ; possibilité de raccourcir à la longueur souhaitée par le client ; surface thermolaquée ; montage flexible et sans outil des inserts, y compris adaptateur high power + convertisseur ; inserts d'éclairage avec différents rayonnements, modules d'éclairage de secours (luminaires pour issue de secours et urgence) à intégrer pour fonctionnement sur batteries centralisées et inserts à capteurs



up to 192lm/W
(high efficiency)

Order options


CONTROL

DALI-2

MATERIAL COLOUR

- jet black RAL 9005 8
- traffic white RAL 9016 7


Pole positions



— Position of the neutral conductor



MOVE IT PRO emergency trimless



INSTALLATION TRACK 220 V – 250 V / 440 V | EM 220 V – 250 V

L (mm)	TYPE	ORDER CODE
1000	channel	086-512113 <input checked="" type="checkbox"/>
2000	channel	086-512213 <input checked="" type="checkbox"/>
3000	channel	086-512313 <input checked="" type="checkbox"/>
4000	channel	086-512413 <input checked="" type="checkbox"/>
custom cut	channel	E83810 ···· <input checked="" type="checkbox"/>

Accessories

END CAPS



TYPE	ORDER CODE
end cap	086-522011 <input checked="" type="checkbox"/>

BLIND COVER




L (mm)	TYPE	ORDER CODE
1000	blind cover (aluminium)	086-601000 <input checked="" type="checkbox"/> B
2000	blind cover (aluminium)	086-603000 <input checked="" type="checkbox"/> B
3000	blind cover (aluminium)	086-605000 <input checked="" type="checkbox"/> B



25000	blind cover	086-608250 <input checked="" type="checkbox"/> B
-------	-------------	--

POWER FEEDER WITH EMERGENCY CONDUCTORS

supply 220-250V / 440 V | EM 220-250 V



TYPE	ORDER CODE
end feed poles right	086-522313 <input checked="" type="checkbox"/>
end feed poles left	086-522413 <input checked="" type="checkbox"/>
middle feed	086-522323 <input checked="" type="checkbox"/>

POWER FEEDER WITHOUT EMERGENCY CONDUCTORS

supply 220-250V / 440 V



TYPE	ORDER CODE
intrack feed (incl. cable 3000mm)	086-5213338

CONNECTOR




TYPE	ORDER CODE
linear connector electrical	086-5211138

MOUNTING ACCESSORIES



TYPE	ORDER CODE
mechanical linear connector (pair)	050-2011110




conductors cutting tool	086-5219110
-------------------------	-------------

Quickinfo

DALI-2

Types

surface suspended



connectors



L-connector

T-connector

X-connector

Colours



reddot winner 2024



MOVE IT PRO system

surface/suspended

EN Extruded aluminium profile with 45 mm width and 59 mm height; for ceiling surface mounting or suspended mounting (cable suspension); height adjustment without tools; designed for continuous lighting systems, L / T / X connectors for flexible system design; with integrated 3-phase copper conductors + 4 emergency lighting copper conductors (2 emergency lighting circuits) + 2 DALI copper conductors for take off of supply voltage, emergency lighting power supply and DALI signal; customcut possible; surface powder coated; insets, incl. high power adapter + converter can be installed flexibly and without tools; light inserts with different patterns of light distribution, emergency light inserts (escape sign and emergency luminaires) for operation on a central battery system and sensor inserts can be integrated

FR Profilé d'aluminium extrudé, 45 mm de large et 59 mm de haut ; pour montage au plafond en saillie ou pour montage suspendu (suspension par câble) ; réglage en hauteur sans outil ; conçu pour les systèmes d'éclairage continu, connecteurs L / T / X pour une grande flexibilité de conception de système ; avec conducteurs en cuivre triphasés intégrés + 4 conducteurs en cuivre pour l'éclairage de secours (2 circuits d'éclairage de secours) + 2 conducteurs en cuivre DALI pour prise en charge de la tension d'alimentation, de l'alimentation électrique d'éclairage de secours et du signal DALI ; possibilité de raccourcir à la longueur souhaitée par le client ; surface thermolaquée ; montage flexible et sans outil des inserts, y compris adaptateur high power + convertisseur ; inserts d'éclairage avec différents rayonnements, modules d'éclairage de secours (luminaires pour issue de secours et urgence) à intégrer pour fonctionnement sur batteries centralisées et inserts à capteurs



up to 192 lm/W
(high efficiency)

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- jet black RAL 9005 8
- traffic white RAL 9016 7

MATERIAL COLOUR

CABLE SUSPENSION

- black 8
- chrome 0



MOVE IT PRO emergency surface/suspended



INSTALLATION TRACK 220 V – 250 V / 440 V | EM 220 V – 250 V

L (mm)	TYPE	ORDER CODE
1000	channel	086-511113
2000	channel	086-511213
3000	channel	086-511313
4000	channel	086-511413
custom cut	channel	E83820

Accessories

END CAPS

TYPE	ORDER CODE
end cap	086-521011

BLIND COVER

L (mm)	TYPE	ORDER CODE
1000	blind cover (aluminium)	086-601000
2000	blind cover (aluminium)	086-603000
3000	blind cover (aluminium)	086-605000
25000	blind cover	086-608250

POWER FEEDER WITH EMERGENCY CONDUCTORS

supply 220-250V / 440 V | EM 220-250 V


TYPE	ORDER CODE
end feed poles right	086-521413
end feed poles left	086-521313
middle feed	086-521323

POWER FEEDER WITHOUT EMERGENCY CONDUCTORS



supply 220-250V / 440 V

TYPE	ORDER CODE
intrack feed (incl. cable 3000mm)	086-521333

Pole positions

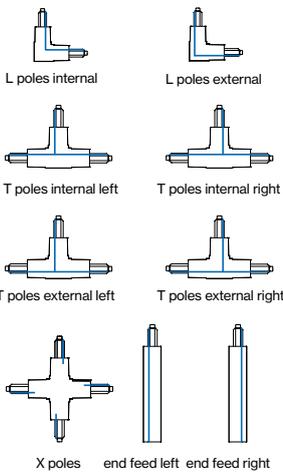

— Position of the neutral conductor

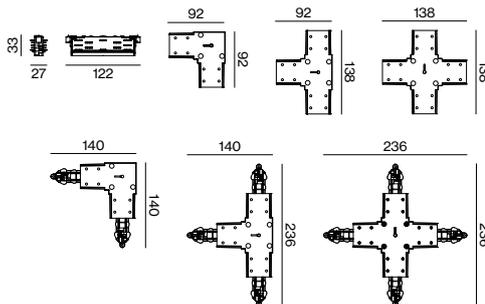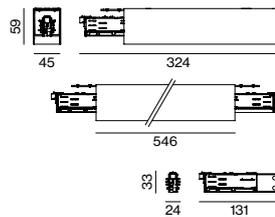

CONNECTORS

TYPE	ORDER CODE
linear connector electrical	086-521113
L-connector poles external	086-521133
L-connector poles internal	086-521233
L-connector mechanical	086-521230
T-connector poles internal right	086-521143
T-connector poles internal left	086-521243
T-connector poles external right	086-521173
T-connector poles external left	086-521273
T-connector (mechanical)	086-521240
X-connector	086-521153
X-connector (mechanical)	086-521150

MOUNTING ACCESSORIES

TYPE	ORDER CODE
ceiling fastener	086-521511
suspension bracket	086-521521
linear suspension connector (mechanical)	086-521531
linear connector (mechanical)	086-521110
conductors cutting tool	086-521911
drilling template for indirect inset	086-521951

CABLE SUSPENSION


TYPE	L (mm)	ORDER CODE
cable suspension	1500	086-521711
cable suspension	3000	086-521721
cable suspension	6000	086-521731
connector cable suspension	1500	058-301811
connector cable suspension	3000	058-301821
connector cable suspension	6000	058-301831
tool for connector cable suspension		050-204921

Quickinfo

DALI-2

Types

surface suspended

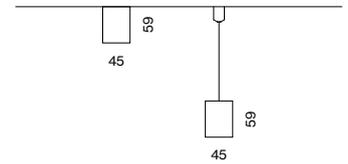

connector



L-connector

Colours



reddot winner 2024



MOVE IT PRO emergency SELV system

surface/suspended

EN Extruded aluminium profile with 45 mm width and 59 mm height; for ceiling surface mounting or suspended mounting (cable suspension); height adjustment without tools; designed for continuous lighting systems, L connectors for flexible system design; with integrated 3-phase copper conductors + 4 emergency lighting copper conductors (2 emergency lighting circuits SELV) + 2 DALI copper conductors for take off of supply voltage, emergency lighting power supply and DALI signal; customcut possible; surface powder coated; insets, incl. high power adapter + converter can be installed flexibly and without tools; light inserts with different patterns of light distribution, emergency light inserts (escape sign and emergency luminaires) for operation on a central battery system and sensor inserts can be integrated

FR Profilé d'aluminium extrudé, 45 mm de large et 59 mm de haut ; pour montage au plafond en saillie ou pour montage suspendu (suspension par câble) ; réglage en hauteur sans outil ; conçu pour les systèmes d'éclairage continu, connecteurs L pour une grande flexibilité de conception de système ; avec conducteurs en cuivre triphasés intégrés + 4 conducteurs en cuivre pour l'éclairage de secours (2 circuits d'éclairage de secours) + 2 conducteurs en cuivre DALI pour prise en charge de la tension d'alimentation, de l'alimentation électrique d'éclairage de secours et du signal DALI ; possibilité de raccourcir à la longueur souhaitée par le client ; surface thermolaquée ; montage flexible et sans outil des inserts, y compris adaptateur high power + convertisseur ; inserts d'éclairage avec différents rayonnements, modules d'éclairage de secours (luminaires pour issue de secours et urgence) à intégrer pour fonctionnement sur batteries centralisées et inserts à capteurs



up to 192 lm/W
(high efficiency)

Order options

CONTROL

DALI-2

MATERIAL COLOUR	
● jet black RAL 9005	8
○ traffic white RAL 9016	7

MATERIAL COLOUR	
black	8
chrome	0



MOVE IT PRO emergency SELV surface/suspended



INSTALLATION TRACK 220 V – 250 V / 440 V | EM 0 – 60 V

L (mm)		ORDER CODE
1000	channel	086-531113
2000	channel	086-531213
3000	channel	086-531313
4000	channel	086-531413
custom cut	channel	E83840



Pole options



— Position of the neutral conductor



Accessories

END CAPS

TYPE	ORDER CODE
end cap	086-521011

BLIND COVER


L (mm)		ORDER CODE
1000	blind cover (aluminium)	086-601000
2000	blind cover (aluminium)	086-603000
3000	blind cover (aluminium)	086-605000
25000	blind cover	086-608250



POWER FEEDER WITH EMERGENCY CONDUCTORS

supply 220-250V / 440 V | EM 0-48 V


TYPE	ORDER CODE
end feed poles right	086-541413
end feed poles left	086-541313
middle feed	086-541323

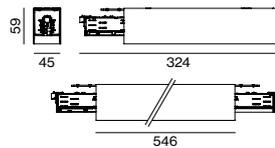

POWER FEEDER WITHOUT EMERGENCY CONDUCTORS


supply 220-250V / 440 V

TYPE	ORDER CODE
intrack feed (incl. cable 3000mm)	086-5213338




CONNECTORS

TYPE	ORDER CODE
linear connector electrical	086-5411138
L-connector poles external	086-541133
L-connector poles internal	086-541233
L-connector mechanical	086-521230

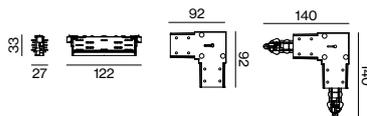


MOUNTING ACCESSORIES

TYPE	ORDER CODE
ceiling fastener	086-521511
suspension bracket	086-521521
linear suspension connector (mechanical)	086-521531
linear connector (mechanical)	086-521110



conductors cutting tool	086-5219110
drilling template for indirect inset	086-5219510

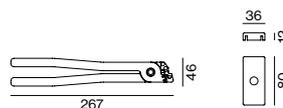

CABLE SUSPENSION

TYPE	L (mm)	ORDER CODE
cable suspension	1500	086-521711
cable suspension	3000	086-521721
cable suspension	6000	086-521731
connector cable suspension	1500	058-301811
connector cable suspension	3000	058-301821
connector cable suspension	6000	058-301831
tool for connector cable suspension		050-2049210

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 80, CRI \geq 90, 3 SDCM
 UGR \leq 19 / 65° \leq 1500 cd/m²
 up to 187 lm/W
 up to 2940 lm/m
 L90 @ 50 000 h
 DALI-2

Types

louver



Colours



Light distribution



super
wide
flood



reddot winner 2024




LOUVER

linear inset

EN Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; for use in schools and offices; energy-efficient LEDs with very good colour rendering

FR Insert lumineux linéaire en plastique ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; affleurant dans le système de profilés ; réflecteur de grande qualité avec surface à microfacettes, métallisée à l'aluminium ; caractéristique d'émission précise avec répartition symétrique de la lumière ; pour utilisation dans les écoles et bureaux ; LED économes en énergie à restitution de couleur élevée



DIN EN 12464-1
UGR \leq 19



up to 187 lm/W
(high efficiency)

Order options

COLOUR TEMPERATURE

2700K CRI ≥ 90	9
3000K CRI ≥ 90	0
3500K CRI ≥ 90	2
4000K CRI ≥ 90	1
2700K CRI ≥ 80	4
3000K CRI ≥ 80	5
3500K CRI ≥ 80	7
4000K CRI ≥ 80	6

CONTROL

DALI-2

LIGHT OPTIC

super wide flood 74°

MATERIAL COLOUR

chrome reflector	4
black reflector	8



LOUVER inset



REFLECTOR WIDE

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.4W	2700K	2580lm	1000	0 8 6 - 6 4 1 0 :: 3 X
	3000K	2580lm		
	3500K	2760lm		
	4000K	2940lm		
26.7W	2700K	3870lm	1500	0 8 6 - 6 4 2 0 :: 3 X
	3000K	3870lm		
	3500K	4140lm		
	4000K	4400lm		
34W	2700K	5160lm	2000	0 8 6 - 6 4 3 0 :: 3 X
	3000K	5160lm		
	3500K	5520lm		
	4000K	5870lm		
41W	2700K	6450lm	2500	0 8 6 - 6 4 4 0 :: 3 X
	3000K	6450lm		
	3500K	6890lm		
	4000K	7340lm		
47W	2700K	7740lm	3000	0 8 6 - 6 4 5 0 :: 3 X
	3000K	7740lm		
	3500K	8270lm		
	4000K	8810lm		



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 UGR ≤ 19
 up to 189 lm/W
 up to 2900 lm/m
 L90 @ 50 000 h
 DALI-2

Types



Colour



Light distribution



wide
flood



reddot winner 2024



LENS

linear inset

^{EN} Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; equipped with specially computed wide beam lenses; precise radiation characteristic with symmetrical light distribution; for use in schools and offices; energy-efficient LEDs with very good colour rendering

^{FR} Insert lumineux linéaire en plastique ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; affleurant dans le système de profilés ; réflecteur de grande qualité avec surface à microfacettes, métallisée à l'aluminium ; caractéristique d'émission précise avec répartition symétrique de la lumière ; pour utilisation dans les écoles et bureaux ; LED économes en énergie à restitution de couleur élevée



DIN EN 12464-1
UGR ≤ 19



up to 189 lm/W
(high efficiency)

Order options

COLOUR TEMPERATURE ⚡


2700K CRI ≥ 90	9
3000K CRI ≥ 90	0
3500K CRI ≥ 90	2
4000K CRI ≥ 90	1
2700K CRI ≥ 80	4
3000K CRI ≥ 80	5
3500K CRI ≥ 80	7
4000K CRI ≥ 80	6

CONTROL

DALI-2

LIGHT OPTIC

wide flood 68°



LENS inset



LENS WIDE

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.2W	3000K	2590lm	1000	0 8 6 - 6 7 1 0 ⚡ 30 W
	3500K	2770lm		
	4000K	2940lm		
26.4W	3000K	3880lm	1500	0 8 6 - 6 7 2 0 ⚡ 30 W
	3500K	4150lm		
	4000K	4420lm		
33W	3000K	5170lm	2000	0 8 6 - 6 7 3 0 ⚡ 30 W
	3500K	5530lm		
	4000K	5890lm		
41W	3000K	6470lm	2500	0 8 6 - 6 7 4 0 ⚡ 30 W
	3500K	6910lm		
	4000K	7360lm		
46W	3000K	7760lm	3000	0 8 6 - 6 7 5 0 ⚡ 30 W
	3500K	8300lm		
	4000K	8830lm		


LUMINOUS FLUX value calculated for CRI ≥ 80, CRI ≥ 90 -17%

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 up to 163 lm/W
 up to 2590 lm/m
 L90 @ 50 000h
 DALI-2

Types

lens wallwasher



Colour



Light distribution



wall wash.



reddot winner 2024



LENS

linear inset

EN Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; equipped with specially computed wallwasher lenses; precise radiation characteristic with asymmetrical light distribution; energy-efficient LEDs with very good colour rendering

FR Insert lumineux linéaire en plastique ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; affleurant dans le système de profilés ; équipé de lentilles lèche-mur spécialement calculées ; caractéristique d'émission précise avec répartition asymétrique de la lumière ; LED économes en énergie à restitution de couleur élevée



up to 190 lm/W
 (high efficiency)

Order options

COLOUR TEMPERATURE

2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

CONTROL

DALI-2

LIGHT OPTIC

wallwasher




LENS inset



LENS WALLWASHER

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.4W	3000K	2270lm	1000	0 8 6 - 6 7 1 0  30 A
26.7W	4000K	2590lm	1500	0 8 6 - 6 7 2 0  30 A
	3000K	3330lm		
34W	4000K	3790lm	2000	0 8 6 - 6 7 3 0  30 A
	3000K	4440lm		
41W	4000K	5050lm	2500	0 8 6 - 6 7 4 0  30 A
	3000K	5550lm		
46W	4000K	6310lm	3000	0 8 6 - 6 7 5 0  30 A
	3000K	6650lm		
	4000K	7580lm		

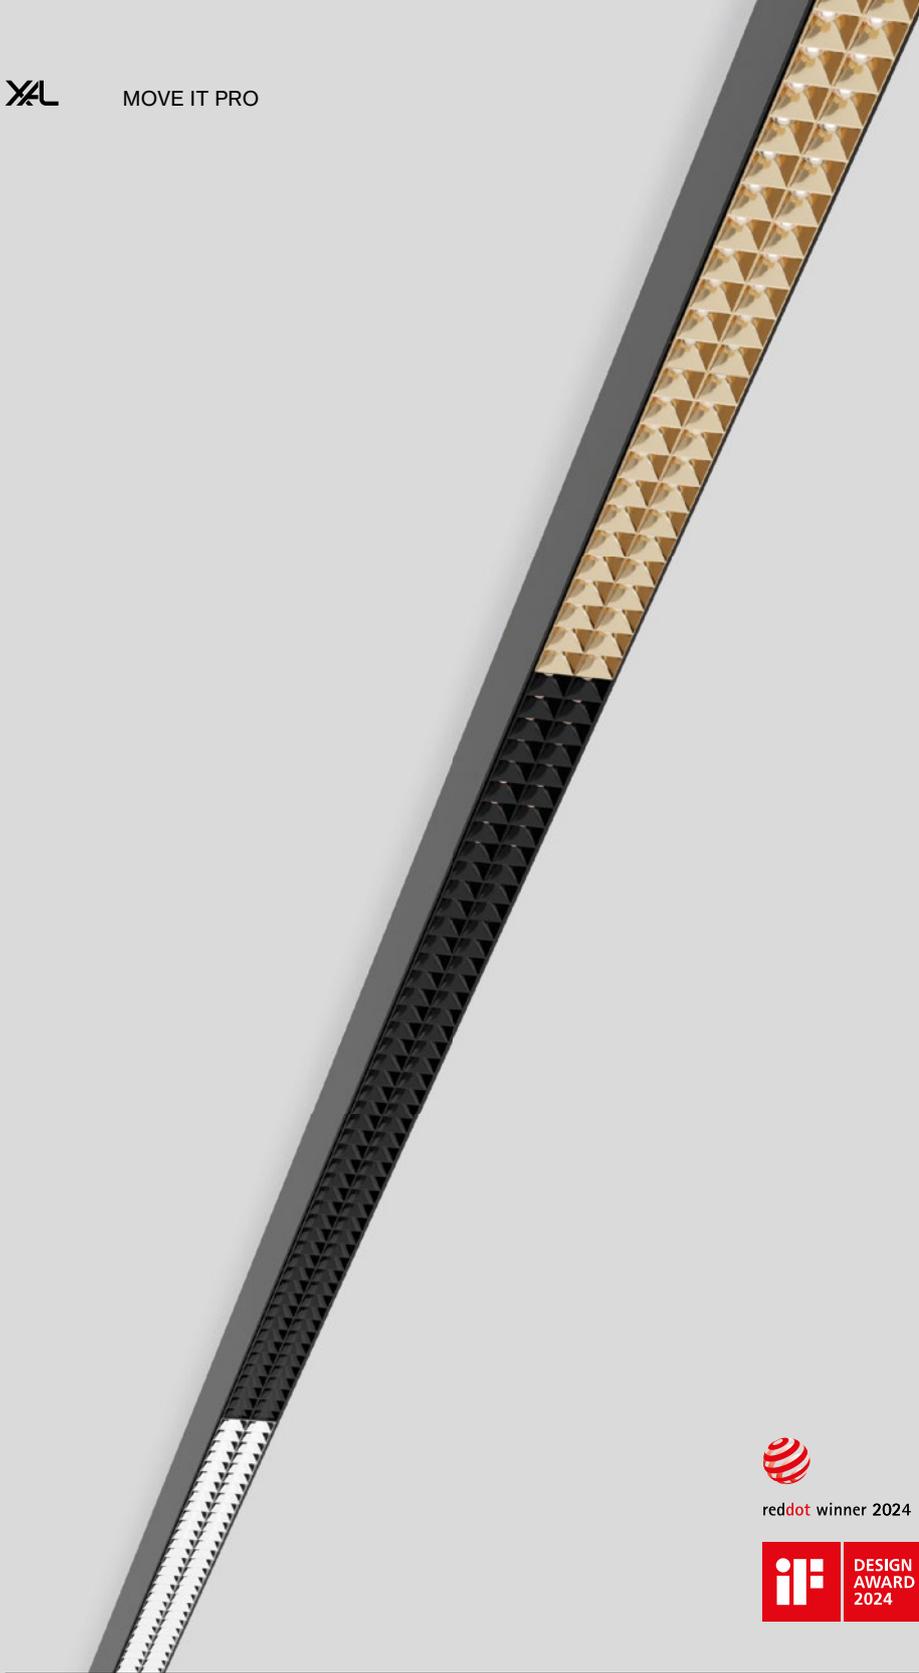

reddot winner 2024




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 UGR ≤ 16, 19 / 65° ≤ 1500 cd/m²
 up to 183 lm/W
 up to 2870 lm/m
 L90 @ 50 000 h
 DALI-2

Types

spot line



Colours



Light distributions




SPOT LINE

linear inset

EN Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with medium or wide flood radiation characteristic; for use in schools, retail and offices; energy-efficient LEDs with very good colour rendering

FR Insert lumineux linéaire en plastique ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; affleurant dans le système de profilés ; équipé de points lumineux à LED simples ; bon anti-éblouissement grâce aux points lumineux en retrait ; malgré tout efficacité accrue grâce à une tech. de lentilles spéciale ; lentilles utilisées avec caractéristique de rayonnement moyenne ou wide flood ; pour utilisation dans les écoles, le commerce et les bureaux ; LED économes en énergie à restitution de couleur élevée



DIN EN 12464-1
 UGR ≤ 16



up to 183 lm/W
 (high efficiency)

Order options

COLOUR TEMPERATURE ⬆

2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

CONTROL

DALI-2

LIGHT OPTIC ▲

medium 28°	M
wide flood 67°	W

MATERIAL COLOUR ▣

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● gold	9



SPOT LINE inset

UGR
≤ 16cd/m²
≤ 1500CRI
≥ 90DALI
1 ADDR.

220-240V

X-PERT

X-PERT

SPOT LINE

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.4W	2700K	2460lm	1000	0 8 6 - 6 3 1 0 ⬆ ▣ ▲
	3000K	2460lm		
	3500K	2630lm		
	4000K	2800lm		
26.7W	2700K	3700lm	1500	0 8 6 - 6 3 2 0 ⬆ ▣ ▲
	3000K	3700lm		
	3500K	3950lm		
	4000K	4210lm		
34W	2700K	4930lm	2000	0 8 6 - 6 3 3 0 ⬆ ▣ ▲
	3000K	4930lm		
	3500K	5270lm		
	4000K	5610lm		
41W	2700K	6160lm	2500	0 8 6 - 6 3 4 0 ⬆ ▣ ▲
	3000K	6160lm		
	3500K	6580lm		
	4000K	7010lm		
47W	2700K	7390lm	3000	0 8 6 - 6 3 5 0 ⬆ ▣ ▲
	3000K	7390lm		
	3500K	7900lm		
	4000K	8410lm		

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 up to 152 lm/W
 up to 2330 lm/m
 L90 @ 50 000 h
 DALI-2

Types

opal



opal jut-out



Colours



Light distribution



opal



reddot winner 2024



OPAL

linear inset

EN Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush or 12 mm protruding in the profile system; equipped with specially computed lenses; homogeneously illuminated, satinised PMMA cover; energy-efficient LEDs with very good colour rendering

FR Insert lumineux linéaire en plastique ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; affleurant dans le système de profilés ; équipé de lentilles spécialement calculées ; cache PMMA, à éclairage homogène, satiné ; LED économes en énergie à restitution de couleur élevée



opal



opal jut-out



continuous cover



up to 152 lm/W
(high efficiency)

Order options

COLOUR TEMPERATURE

2700K CRI ≥ 90	9
3000K CRI ≥ 90	0
3500K CRI ≥ 90	2
4000K CRI ≥ 90	1
2700K CRI ≥ 80	4
3000K CRI ≥ 80	5
3500K CRI ≥ 80	7
4000K CRI ≥ 80	6

CONTROL

DALI-2

LIGHT OPTIC

opal

MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8



OPAL inset



LIGHT INSET

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX (flush)	LUM. FLUX (jut-out)	L (mm)	ORDER CODE
18.2W	2700K	2050lm	2210lm	1000	0 8 6 - 6 1 1 0 :: 30
	3000K	2050lm	2210lm		
	3500K	2190lm	2360lm		
	4000K	2330lm	2510lm		
26.4W	2700K	3070lm	3310lm	1500	0 8 6 - 6 1 2 0 :: 30
	3000K	3070lm	3310lm		
	3500K	3280lm	3540lm		
	4000K	3490lm	3770lm		
33W	2700K	4090lm	4420lm	2000	0 8 6 - 6 1 3 0 :: 30
	3000K	4090lm	4420lm		
	3500K	4370lm	4720lm		
	4000K	4660lm	5030lm		
41W	2700K	5110lm	5520lm	2500	0 8 6 - 6 1 4 0 :: 30
	3000K	5110lm	5520lm		
	3500K	5470lm	5900lm		
	4000K	5820lm	6280lm		
46W	2700K	6140lm	6630lm	3000	0 8 6 - 6 1 5 0 :: 30
	3000K	6140lm	6630lm		
	3500K	6560lm	7080lm		
	4000K	6980lm	7540lm		

Accessories

END CAPS

TYPE	ORDER CODE
opal	0 8 6 - 6 0 9 1 1 1
opal jut-out	0 8 6 - 6 0 9 1 3 1

COVER


TYPE	L (mm)	ORDER CODE
continuous opal cover	6000	0 8 6 - 6 0 8 0 6 0 0 0
continuous opal cover	25000	0 8 6 - 6 0 8 2 5 0 0 0
opal cover	999	0 8 6 - 6 0 1 0 0 0 0 0
opal cover	1499	0 8 6 - 6 0 2 0 0 0 0 0
opal cover	1999	0 8 6 - 6 0 3 0 0 0 0 0
opal cover	2498	0 8 6 - 6 0 4 0 0 0 0 0
opal cover	2998	0 8 6 - 6 0 5 0 0 0 0 0
opal jut-out cover	999	0 8 6 - 6 0 5 0 0 0 0 J
opal jut-out cover	1499	0 8 6 - 6 0 2 0 0 0 0 J
opal jut-out cover	1999	0 8 6 - 6 0 3 0 0 0 0 J
opal jut-out cover	2498	0 8 6 - 6 0 4 0 0 0 0 J
opal jut-out cover	2998	0 8 6 - 6 0 5 0 0 0 0 J

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 UGR ≤ 19 / 65° ≤ 3000 cd/m²
 up to 129 lm/W
 up to 1940 lm/m
 L90 @ 50 000 h
 DALI-2

Types

microprismatic



Colours



Light distribution



reddot winner 2024



MICROPRISMATIC

linear inset

EN Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; completely homogeneously illuminated, microprismatic PMMA cover; for use in offices; energy-efficient LEDs with very good colour rendering

FR Insert lumineux linéaire en plastique ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; affleurant dans le système de profilés ; cache en PMMA microprismatique, éclairage parfaitement homogène ; pour utilisation dans les bureaux ; LED économes en énergie à restitution de couleur élevée



continuous cover



up to 129 lm/W (high efficiency)

Order options

COLOUR TEMPERATURE

2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

CONTROL


DALI-2

LIGHT OPTIC

microprismatic

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



MICROPRISMATIC inset



LIGHT INSET UGR ≤ 22

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.2 W	3000 K	1710 lm	1000	0 8 6 - 6 1 1 0 :: 30
	4000 K	1940 lm		
26.4 W	3000 K	2560 lm	1500	0 8 6 - 6 1 2 0 :: 30
	4000 K	2910 lm		
33 W	3000 K	3420 lm	2000	0 8 6 - 6 1 3 0 :: 30
	4000 K	3890 lm		
41 W	3000 K	4270 lm	2500	0 8 6 - 6 1 4 0 :: 30
	4000 K	4860 lm		
46 W	3000 K	5120 lm	3000	0 8 6 - 6 1 5 0 :: 30
	4000 K	5830 lm		



LIGHT INSET UGR ≤ 19

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
8 W	3000 K	768 lm	1000	0 8 6 - 6 2 1 0 :: 30
	4000 K	873 lm		
11.6 W	3000 K	1150 lm	1500	0 8 6 - 6 2 2 0 :: 30
	4000 K	1310 lm		
14.7 W	3000 K	1540 lm	2000	0 8 6 - 6 2 3 0 :: 30
	4000 K	1750 lm		
17.9 W	3000 K	1920 lm	2500	0 8 6 - 6 2 4 0 :: 30
	4000 K	2180 lm		
20.3 W	3000 K	2300 lm	3000	0 8 6 - 6 2 5 0 :: 30
	4000 K	2620 lm		

Accessories

END CAPS

TYPE	ORDER CODE
end caps pair for microprismatic	0 8 6 - 6 0 9 1 1 1

COVER

TYPE	L (mm)	ORDER CODE
continuous microprismatic cover	6000	0 8 6 - 6 0 8 0 6 0 0 P
continuous microprismatic cover	25000	0 8 6 - 6 0 8 2 5 0 0 P
microprismatic cover	999	0 8 6 - 6 0 1 0 0 0 0 P
microprismatic cover	1499	0 8 6 - 6 0 2 0 0 0 0 P
microprismatic cover	1999	0 8 6 - 6 0 3 0 0 0 0 P
microprismatic cover	2498	0 8 6 - 6 0 4 0 0 0 0 P
microprismatic cover	2998	0 8 6 - 6 0 5 0 0 0 0 P

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 up to 162lm/W
 up to 3400lm/m
 L90 @ 50 000h
 DALI-2

Types

indirect



low power: 1500 / 3000 / 4500
 high power: 1000 / 2000

Colour**Light distribution**

indirect



reddot winner 2024

**INDIRECT**

linear inset

EN Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; with indirect light component for additional accentuation of the ceiling; high quality lens system for maximum, homogeneous ceiling illumination; energy-efficient LEDs with very good colour rendering

FR Insert lumineux linéaire en plastique ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; affleurant dans le système de profilés ; avec composants lumineux indirects pour une accentuation supplémentaire du plafond ; système de lentilles haute qualité pour un éclairage du plafond maximal et homogène ; LED économes en énergie à restitution de couleur élevée




170° indirect
 illumination

Order options

COLOUR TEMPERATURE	
2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

CONTROL
DALI-2

LIGHT OPTIC
batwing



INDIRECT inset



INDIRECT BATWING LOW POWER

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
17.7W	2700K	2240lm	1472	0 8 6 - 6 8 2 0 :: 30 B
	3000K	2240lm		
	3500K	2400lm		
	4000K	2550lm		
32W	2700K	4480lm	2942	0 8 6 - 6 8 5 0 :: 30 B
	3000K	4480lm		
	3500K	4790lm		
	4000K	5100lm		
47W	2700K	6720lm	4412	0 8 6 - 6 8 8 0 :: 30 B
	3000K	6720lm		
	3500K	7190lm		
	4000K	7650lm		

INDIRECT BATWING HIGH POWER

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
24.3W	2700K	2990lm	982	0 8 6 - 6 8 1 5 :: 30 B
	3000K	2990lm		
	3500K	3190lm		
	4000K	3400lm		
43W	2700K	5980lm	1962	0 8 6 - 6 8 3 5 :: 30 B
	3000K	5980lm		
	3500K	6390lm		
	4000K	6800lm		

Accessories

MOUNTING ACCESSORIES



TYPE	ORDER CODE
drilling template for indirect inset	0 8 6 - 5 2 1 9 5 1 0

INDIRECT EXTENSION

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
2.6W low power	2700K	374lm	245	0 8 6 - 6 8 0 0 :: 30 B
	3000K	374lm		
	3500K	399lm		
5.4W high power	4000K	425lm	245	0 8 6 - 6 8 0 5 :: 30 B
	2700K	747lm		
	3000K	747lm		
	3500K	799lm		
	4000K	850lm		

max. inset length per driver: low power 4500mm, high power 2000mm without power supply

Example for extension



LUMINOUS FLUX value calculated for CRI ≥ 80, CRI ≥ 90 -16%



reddot winner 2024



NOBA

decorative inset

EN Decorative pendant light inset made of aluminium; choice of single lamp, double lamps or triple lamp; light inset, incl. high power adapter + converter can be installed flexibly and without tools; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black); can be individually shortened; high quality plano-convex glass lens; no multiple shadows; energy-efficient LEDs with very good colour rendering; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

FR Élément lumineux décoratif en aluminium pour luminaire suspendu ; au choix à une, deux ou trois lampes ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; surface en chrome poli, aluminium brossé ou thermolaquée ; suspension par câble, câble d'alimentation inclus (noir) ; recoupable à volonté ; lentille verre plan-convexe grde qualité ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; anneaux de montage au plafond pour un positionnement multiple des luminaires dans la pièce disponibles comme accessoires

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90, 2 SDCM
up to 111lm/W
L80 @ 50 000 h
DALI-2

Types



Colours



Light distribution



direct



free positioning
by cable and hook



high quality
glass lens

Order options

MOUNTING

suspension 2000 mm

COLOUR TEMPERATURE

2700K	9
3000K	0
3500K	2
4000K	1

CONTROL

DALI-2

MATERIAL COLOUR

<input type="checkbox"/> traffic white RAL 9016	7
<input checked="" type="checkbox"/> jet black RAL 9005	8
<input type="checkbox"/> brushed aluminium	6
<input type="checkbox"/> chrome	4
<input type="checkbox"/> gun metal	5
<input type="checkbox"/> brushed brass	3
<input type="checkbox"/> rose gold	9

MATERIAL COLOUR


ACCESSORIES / DRIVER

<input type="checkbox"/> traffic white RAL 9016	7
<input checked="" type="checkbox"/> jet black RAL 9005	8

BEAM ANGLE


wide flood 67°

NOBA 60




DOWNLIGHT 1 LAMP

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.1W	2700K	1040lm	086-7110033W
	3000K	1090lm	
	3500K	1140lm	
	4000K	1170lm	



DOWNLIGHT 2 LAMPS

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
28.2W	2700K	2080lm	086-7111033W
	3000K	2180lm	
	3500K	2280lm	
	4000K	2340lm	



DOWNLIGHT 3 LAMPS

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
41W	2700K	3120lm	086-7112033W
	3000K	3270lm	
	3500K	3410lm	
	4000K	3510lm	

Mounting accessories



HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001



reddot winner 2024



ARY

decorative inset

EN Decorative pendant light inset made of aluminium; choice of single lamp, double lamps or triple lamp; light inset, incl. high power adapter + converter can be installed flexibly and without tools; surface powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; precise radiation characteristics with different beam angles; shades available as accessory in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

FR Élément lumineux décoratif en aluminium pour luminaire suspendu ; au choix à une, deux ou trois lampes ; insert d'éclairage, y compris adaptateur high power + convertisseur, insertion et déplacement sans outil ; surface thermolaquée ; suspension par câble, câble d'alimentation inclus (noir ou blanche) ; recoupable à volonté ; bon anti-éblouissement grâce aux points lumineux en retrait ; incl. optique lentille de grande qualité ; précision de caractéristique de rayonnement avec divers angles de diffusion ; abat-jours disponibles comme accessoires dans les couleurs RAL velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white ou signal black ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; anneaux de montage au plafond pour un positionnement multiple des luminaires dans la pièce disponibles comme accessoires

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90, 3 SDCM
up to 86 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types



Colours



Light distributions



free positioning
by ring and hook

Order options

MOUNTING

suspension 2000 mm

COLOUR TEMPERATURE

2700K	9
3000K	0
3500K	2
4000K	1

CONTROL

DALI-2

MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input type="radio"/> jet black RAL 9005	8
<input checked="" type="radio"/> special colours*	X

*cable and driver always in black

MATERIAL COLOUR

ACCESSORIES / DRIVER

<input type="radio"/> traffic white RAL 9016	7
<input type="radio"/> jet black RAL 9005	8

BEAM ANGLE

medium 25°	M
flood 44°	F

SHADE COLOUR


<input type="checkbox"/> velvet beige RAL 085 80 10	C
<input type="checkbox"/> madeira brown RAL 050 40 40	T
<input type="checkbox"/> kingfisher grey RAL 230 60 10	L
<input type="checkbox"/> woodpecker olive RAL 10 50 20	G
<input type="checkbox"/> signal white RAL 9003	W
<input type="checkbox"/> signal black RAL 9004	B

ARY



DOWNLIGHT 1 LAMP

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.1W	2700K	1390lm	086-7300::3■▲
	3000K	1450lm	
	3500K	1520lm	
	4000K	1560lm	




DOWNLIGHT 2 LAMPS

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
28.2W	2700K	2780lm	086-7310::3■▲
	3000K	2910lm	
	3500K	3040lm	
	4000K	3130lm	



DOWNLIGHT 3 LAMPS

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
41W	2700K	4170lm	086-7320::3■▲
	3000K	4360lm	
	3500K	4560lm	
	4000K	4690lm	



Mounting accessories



TYPE	Ø-H (mm)	ORDER CODE
ring ceiling mounted	50-88	050-051021■
hook	18-58	050-051031■

Optical accessories



SHADE

TYPE	Ø-H (mm)	ORDER CODE
cone 300	300-188	049-593311□
cone 400	400-253	049-593411□
cone 500	500-318	049-593511□

only for one lamp

LUMINOUS FLUX value calculated for medium

Quickinfo

sensor
 ESSENTIAL, SENSE
 DALI-2

Type

sensor



41

Inset colours**Sensors**

essen- sense
 tial



reddot winner 2024

**SENSOR**

inset

^{EN} Sensor inset; choice of ESSENTIAL or SENSE; ESSENTIAL: brightness and presence sensor; SENSE: brightness, presence, temperature, humidity, air quality and noise level sensor; flush with profile system

^{FR} Insert à capteur ; au choix ESSENTIAL ou SENSE ; ESSENTIAL : capteur de luminosité et de présence ; SENSE : capteur de luminosité, de présence, de température, d'humidité ambiante, de qualité de l'air et de volume sonore ; affleurant dans le système de profilés


Order options

CONTROL

DALI-2

INSET COLOUR

- traffic white RAL 9016 7
- jet black RAL 9005 8



SENSOR inset



ESSENTIAL SENSOR

TYPE
brightness & presence _____ **ORDER CODE**
0 8 6 - 5 2 1 8 1 1



SENSE SENSOR

TYPE
brightness, presence, temperature,
sound pressure, humidity, CO₂ _____ **ORDER CODE**
0 8 6 - 5 2 1 8 1 2