



SASSO 60 round sensor/emergency

recessed

EN Round inset (Emergency Light or Sensor); installation without tools in mounting set (trimless or with trim); surface lacquered; installation possible in different housings; LED emergency light inset: 3 variants with different test possibilities - Basic with test button, selftest with status LED or Pro DALI with monitoring via DALI; sensor with DALI-2 control: 2 variants - Basic with brightness and presence sensor or Pro with additional temperature, humidity, air quality and noise level measurement


FR Insert rond (écl. de secours ou capteur) ; montage sans outil en kit de montage (sans bord ou avec bord continu) ; surface laquée ; encastrement possible dans différents boîtiers ; insert pour éclairage de secours LED : 3 var. avec diff. possib. d'essai – Basic avec touche d'essai, auto-test avec LED d'état ou Pro DALI avec surveill. par DALI ; capteur avec commande DALI-2 : 2 variantes – Basic avec capteur de luminosité et de présence ou Pro avec mesure suppl. de la température, de l'humidité de l'air et du bruit

Quickinfo

sensor
ESSENTIAL, SENSE
DALI-2

emergency light
6500 K
CRI ≥ 80
200 lm
L80 @ 50000 h
non maintained

Types

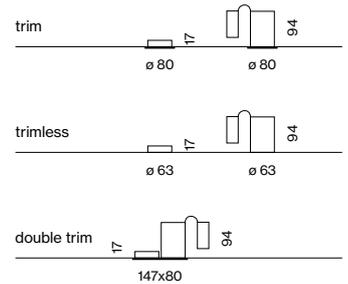

Housing colours



Inset colours



Sensors



Order options

INSET COLOUR

- traffic white RAL 9016 7
 jet black RAL 9005 1

BEAM ANGLE EMERGENCY LIGHT

- spot lens
 escape route lens
 anti panic lens



Options on request

MOUNTING SET

- acoustic soft ceilings

INSET COLOUR

- grey, gold



SASSO 60 sensor round



ESSENTIAL SENSOR


TYPE
 brightness & presence **ORDER CODE**
0 48 - 2 69 3 1 1



SENSE SENSOR

TYPE
 brightness, presence, temperature,
 sound pressure, humidity, CO₂ **ORDER CODE**
0 48 - 2 69 3 1 2

SASSO 60 emergency light round



EMERGENCY 3h

TYPE
 BASIC | 2W **ORDER CODE**
0 48 - 2 69 3 2 1
 SELF-TEST | 2W **ORDER CODE**
0 48 - 2 69 3 2 2
 PRO DALI | 2W **ORDER CODE**
0 48 - 2 69 3 2 3


incl. 3 interchangeable lenses

Electrical accessories


ACCUPACK

TYPE
 replacement accupack 3h **ORDER CODE**
0 48 - 2 69 3 9 1 0


Light distributions




emergency light
spot lens



emergency light
escape route lens



emergency light
anti panic lens

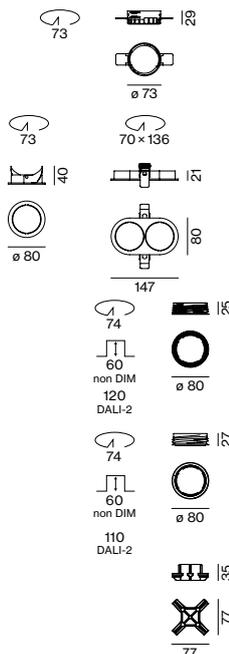

Mounting accessories

TRIMLESS MOUNTING SET for plasterboard ceilings 12.5/15/25 mm

COLOUR
 traffic white RAL9016 **ORDER CODE**
0 48 - 2 69 6 1 1 7

MOUNTING SET WITH TRIM for intermediate ceilings 2-25 mm

TYPE	COLOUR	ORDER CODE
1 lamp	<input type="radio"/> traffic white RAL9016	0 48 - 2 69 6 3 1 7
	<input checked="" type="radio"/> jet black RAL 9005	0 48 - 2 69 6 3 1 8
2 lamps	<input type="radio"/> traffic white RAL9016	0 48 - 2 69 8 3 1 7
	<input checked="" type="radio"/> jet black RAL 9005	0 48 - 2 69 8 3 1 8

TRIMLESS MOUNTING SET for soft acoustic ceilings 25-40 mm

COLOUR
 signal white RAL 9003 **ORDER CODE**
0 48 - 2 69 6 1 9 7

MOUNTING SET WITH TRIM for soft acoustic ceilings 25-40 mm

TYPE	COLOUR	ORDER CODE
1 lamp	<input type="radio"/> signal white RAL 9003	0 48 - 2 69 6 3 9 7
	<input checked="" type="radio"/> traffic black RAL 9017	0 48 - 2 69 6 3 9 8

MOUNTING TOOL for soft acoustic ceilings

TYPE
 SASSO 60 **ORDER CODE**
0 48 - 2 69 5 9 1 8

CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (mm)	ORDER CODE
exposed concrete ceilings	230-230-162	0 48 - 2 69 5 2 1 0
primed concrete ceilings*	614-307-120	0 48 - 2 69 5 1 1 0

*order mounting set separately, not applicable for 2 lamps mounting set with trim