

## UNICO Q1 / Q4 basic

recessed

**EN** Square recessed multi-downlight made of die-cast aluminium; equipped with one (Q1) / four (Q4) individually selectable or pre-specified, customised light element(s); or with a sensor; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation possible in different housings; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

**FR** Multi-Downlight carré en aluminium moulé sous pression pour encastrément ; équipé d'un (Q1) / quatre (Q4) éléments optiques à choisir de façon personnalisée ou définis de manière fixe, spécifiques à chaque application ; ou avec un capteur (Q1) ; montage sans outil en kit de montage par système à dé clic à bille ; installation électrique facile par enfichage protégé contre les inversions de polarité ; convient aux épaisseurs de plafond de 2-25 mm ; surface thermolaquée ; encastrément possible dans différents boîtiers ; réflecteur de grande qualité avec surface à microfacettes, métallisée à l'aluminium ; caractéristique de diffusion précise avec différentes possibilités de répartitions symétriques de la lumière ; ou avec distribution asymétrique de la lumière ; High-Power-LED à grande efficacité énergétique, très bon rendu des couleurs ; sans distorsions

### Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI  $\geq$  90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)  
 UGR  $\leq$  10, UGR  $\leq$  16, UGR  $\leq$  19  
 jusqu'à 133 lm/W  
 L85 / 50000 h, L90 / 50000 h  
 DALI-2, non DIM  
 front IP20

### Types

trim	trimless
□ 101	□ 85
□ 63	□ 47

### Couleur



### Set de montage



### Répartition de la lumière



DiiA® standards  
251, 252, 253



sensor version  
available



one luminaire  
multiple scenes




plug / socket  
connector



black & gold  
reflector  
(optional)



tunable white  
2700 - 5000 K  
(optional)



155



### UNICO Q1 basic high efficient



#### FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.1 W	2700 K	437 lm	107 lm/W	0 9 0 - 7 Q 1 9 ⇄ C 0 ■ 3 1
	3000 K	437 lm	107 lm/W	0 9 0 - 7 Q 1 0 ⇄ C 0 ■ 3 1
	3500 K	455 lm	111 lm/W	0 9 0 - 7 Q 1 2 ⇄ C 0 ■ 3 1
	4000 K	464 lm	113 lm/W	0 9 0 - 7 Q 1 1 ⇄ C 0 ■ 3 1

#### WIDE FLOOD ROUND 71°, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.1 W	2700 K	449 lm	110 lm/W	0 9 0 - 7 Q 1 9 ⇄ D 0 ■ 3 1
	3000 K	449 lm	110 lm/W	0 9 0 - 7 Q 1 0 ⇄ D 0 ■ 3 1
	3500 K	468 lm	114 lm/W	0 9 0 - 7 Q 1 2 ⇄ D 0 ■ 3 1
	4000 K	477 lm	116 lm/W	0 9 0 - 7 Q 1 1 ⇄ D 0 ■ 3 1

#### FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.1 W	2700 K	459 lm	112 lm/W	0 9 0 - 7 Q 1 9 ⇄ F 0 ■ 3 1
	3000 K	459 lm	112 lm/W	0 9 0 - 7 Q 1 0 ⇄ F 0 ■ 3 1
	3500 K	478 lm	117 lm/W	0 9 0 - 7 Q 1 2 ⇄ F 0 ■ 3 1
	4000 K	487 lm	119 lm/W	0 9 0 - 7 Q 1 1 ⇄ F 0 ■ 3 1

#### WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.1 W	2700 K	471 lm	115 lm/W	0 9 0 - 7 Q 1 9 ⇄ G 0 ■ 3 1
	3000 K	471 lm	115 lm/W	0 9 0 - 7 Q 1 0 ⇄ G 0 ■ 3 1
	3500 K	491 lm	120 lm/W	0 9 0 - 7 Q 1 2 ⇄ G 0 ■ 3 1
	4000 K	501 lm	122 lm/W	0 9 0 - 7 Q 1 1 ⇄ G 0 ■ 3 1



155



### UNICO Q1 basic



#### SPOT ROUND 15°, chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	265 lm	44 lm/W	0 9 0 - 7 Q 1 4 ⇄ K 0 0 2 1
	3000 K	287 lm	48 lm/W	0 9 0 - 7 Q 1 5 ⇄ K 0 0 2 1
	4000 K	299 lm	50 lm/W	0 9 0 - 7 Q 1 6 ⇄ K 0 0 2 1

#### Order options

CONTROL	⇄	COLOUR	■	COLOUR	
non DIM	1	black reflector	B	jet black	RAL 9005
DALI-2	3	chrome reflector	0	traffic white	RAL 9016

**NARROW MEDIUM ROUND 22°, chrome reflector, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	269 lm	45 lm/W	0 9 0 - 7 Q 1 4  N 0 0 2 1
	3000 K	292 lm	49 lm/W	0 9 0 - 7 Q 1 5  N 0 0 2 1
	4000 K	303 lm	51 lm/W	0 9 0 - 7 Q 1 6  N 0 0 2 1

**MEDIUM ROUND 33°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	359 lm	60 lm/W	0 9 0 - 7 Q 1 4  B 0  2 1
	3000 K	390 lm	65 lm/W	0 9 0 - 7 Q 1 5  B 0  2 1
	4000 K	406 lm	68 lm/W	0 9 0 - 7 Q 1 6  B 0  2 1

**FLOOD ROUND 49°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	413 lm	69 lm/W	0 9 0 - 7 Q 1 4  C 0  2 1
	3000 K	449 lm	75 lm/W	0 9 0 - 7 Q 1 5  C 0  2 1
	4000 K	466 lm	78 lm/W	0 9 0 - 7 Q 1 6  C 0  2 1

**WIDE FLOOD ROUND 72°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	409 lm	68 lm/W	0 9 0 - 7 Q 1 4  D 0  2 1
	3000 K	444 lm	74 lm/W	0 9 0 - 7 Q 1 5  D 0  2 1
	4000 K	462 lm	77 lm/W	0 9 0 - 7 Q 1 6  D 0  2 1

**MEDIUM SQUARE 32°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	353 lm	59 lm/W	0 9 0 - 7 Q 1 4  E 0  2 1
	3000 K	384 lm	64 lm/W	0 9 0 - 7 Q 1 5  E 0  2 1
	4000 K	399 lm	67 lm/W	0 9 0 - 7 Q 1 6  E 0  2 1

**FLOOD SQUARE 56°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	420 lm	70 lm/W	0 9 0 - 7 Q 1 4  F 0  2 1
	3000 K	456 lm	76 lm/W	0 9 0 - 7 Q 1 5  F 0  2 1
	4000 K	474 lm	79 lm/W	0 9 0 - 7 Q 1 6  F 0  2 1

**RECTANGULAR MEDIUM 34°x69°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	365 lm	61 lm/W	0 9 0 - 7 Q 1 4  R 0  2 1
	3000 K	396 lm	66 lm/W	0 9 0 - 7 Q 1 5  R 0  2 1
	4000 K	411 lm	69 lm/W	0 9 0 - 7 Q 1 6  R 0  2 1

**Order options**

CONTROL		COLOUR		COLOUR	
non DIM	1	black reflector	B	jet black	RAL 9005
DALI-2	3	chrome reflector	0	traffic white	RAL 9016

**WIDE FLOOD SQUARE 71°, CRI ≥ 90**


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	432 lm	72 lm/W	0 9 0 - 7 Q 1 4 $\blacklozenge$ G 0 $\blacksquare$ 2 1
	3000 K	469 lm	78 lm/W	0 9 0 - 7 Q 1 5 $\blacklozenge$ G 0 $\blacksquare$ 2 1
	4000 K	487 lm	81 lm/W	0 9 0 - 7 Q 1 6 $\blacklozenge$ G 0 $\blacksquare$ 2 1

**WALLWASHER chrome reflector, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	365 lm	61 lm/W	0 9 0 - 7 Q 1 4 $\blacklozenge$ A 0 0 2 1
	3000 K	397 lm	66 lm/W	0 9 0 - 7 Q 1 5 $\blacklozenge$ A 0 0 2 1
	4000 K	412 lm	69 lm/W	0 9 0 - 7 Q 1 6 $\blacklozenge$ A 0 0 2 1

**WALLWASHER FLOOR CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.0 W	2700 K	381 lm	64 lm/W	0 9 0 - 7 Q 1 4 $\blacklozenge$ W 0 $\blacksquare$ 2 1
	3000 K	414 lm	69 lm/W	0 9 0 - 7 Q 1 5 $\blacklozenge$ W 0 $\blacksquare$ 2 1
	4000 K	430 lm	72 lm/W	0 9 0 - 7 Q 1 6 $\blacklozenge$ W 0 $\blacksquare$ 2 1

**UNICO Q4 basic high efficient****FLOOD ROUND 46°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
11.6 W	2700 K	1340 lm	116 lm/W	0 9 0 - 7 Q 4 9 $\blacklozenge$ C 0 $\blacksquare$ 3 1
	3000 K	1340 lm	116 lm/W	0 9 0 - 7 Q 4 0 $\blacklozenge$ C 0 $\blacksquare$ 3 1
	3500 K	1400 lm	121 lm/W	0 9 0 - 7 Q 4 2 $\blacklozenge$ C 0 $\blacksquare$ 3 1
	4000 K	1420 lm	122 lm/W	0 9 0 - 7 Q 4 1 $\blacklozenge$ C 0 $\blacksquare$ 3 1

**WIDE FLOOD ROUND 71°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
11.6 W	2700 K	1380 lm	119 lm/W	0 9 0 - 7 Q 4 9 $\blacklozenge$ D 0 $\blacksquare$ 3 1
	3000 K	1380 lm	119 lm/W	0 9 0 - 7 Q 4 0 $\blacklozenge$ D 0 $\blacksquare$ 3 1
	3500 K	1440 lm	124 lm/W	0 9 0 - 7 Q 4 2 $\blacklozenge$ D 0 $\blacksquare$ 3 1
	4000 K	1460 lm	126 lm/W	0 9 0 - 7 Q 4 1 $\blacklozenge$ D 0 $\blacksquare$ 3 1

**FLOOD SQUARE 54°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
11.6 W	2700 K	1410 lm	122 lm/W	0 9 0 - 7 Q 4 9 $\blacklozenge$ F 0 $\blacksquare$ 3 1
	3000 K	1410 lm	122 lm/W	0 9 0 - 7 Q 4 0 $\blacklozenge$ F 0 $\blacksquare$ 3 1
	3500 K	1470 lm	127 lm/W	0 9 0 - 7 Q 4 2 $\blacklozenge$ F 0 $\blacksquare$ 3 1
	4000 K	1500 lm	129 lm/W	0 9 0 - 7 Q 4 1 $\blacklozenge$ F 0 $\blacksquare$ 3 1

**Order options**

CONTROL		COLOUR		COLOUR	
non DIM	$\blacklozenge$ 1	black reflector	$\blacksquare$ B	jet black	RAL 9005
DALI-2	$\blacklozenge$ 3	chrome reflector	$\blacksquare$ O	traffic white	RAL 9016

**WIDE FLOOD SQUARE 71°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
11.6 W	2700 K	1450 lm	125 lm/W	0 9 0 - 7 Q 4 9 ◆ G 0 ■ 3 1
	3000 K	1450 lm	125 lm/W	0 9 0 - 7 Q 4 0 ◆ G 0 ■ 3 1
	3500 K	1510 lm	130 lm/W	0 9 0 - 7 Q 4 2 ◆ G 0 ■ 3 1
	4000 K	1540 lm	133 lm/W	0 9 0 - 7 Q 4 1 ◆ G 0 ■ 3 1


**UNICO Q4 basic**

**SPOT ROUND 15°, chrome reflector, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	816 lm	62 lm/W	0 9 0 - 7 Q 4 4 ◆ K 0 0 2 1
	3000 K	870 lm	66 lm/W	0 9 0 - 7 Q 4 5 ◆ K 0 0 2 1
	4000 K	934 lm	71 lm/W	0 9 0 - 7 Q 4 6 ◆ K 0 0 2 1


**NARROW MEDIUM ROUND 22°, chrome reflector, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	830 lm	63 lm/W	0 9 0 - 7 Q 4 4 ◆ N 0 0 2 1
	3000 K	884 lm	67 lm/W	0 9 0 - 7 Q 4 5 ◆ N 0 0 2 1
	4000 K	949 lm	72 lm/W	0 9 0 - 7 Q 4 6 ◆ N 0 0 2 1

**MEDIUM ROUND 33°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1110 lm	85 lm/W	0 9 0 - 7 Q 4 4 ◆ B 0 ■ 2 1
	3000 K	1180 lm	90 lm/W	0 9 0 - 7 Q 4 5 ◆ B 0 ■ 2 1
	4000 K	1270 lm	97 lm/W	0 9 0 - 7 Q 4 6 ◆ B 0 ■ 2 1

**FLOOD ROUND 49°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1280 lm	98 lm/W	0 9 0 - 7 Q 4 4 ◆ C 0 ■ 2 1
	3000 K	1360 lm	104 lm/W	0 9 0 - 7 Q 4 5 ◆ C 0 ■ 2 1
	4000 K	1460 lm	111 lm/W	0 9 0 - 7 Q 4 6 ◆ C 0 ■ 2 1

**WIDE FLOOD ROUND 72°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1260 lm	96 lm/W	0 9 0 - 7 Q 4 4 ◆ D 0 ■ 2 1
	3000 K	1350 lm	103 lm/W	0 9 0 - 7 Q 4 5 ◆ D 0 ■ 2 1
	4000 K	1440 lm	110 lm/W	0 9 0 - 7 Q 4 6 ◆ D 0 ■ 2 1

**Order options**

CONTROL	◆	COLOUR	■	COLOUR	
non DIM	1	black reflector	B	jet black	RAL 9005
DALI-2	3	chrome reflector	0	traffic white	RAL 9016

**MEDIUM SQUARE 32°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1090 lm	83 lm/W	0 9 0 - 7 Q 4 4 $\blacklozenge$ E 0 $\blacksquare$ 2 1
	3000 K	1160 lm	89 lm/W	0 9 0 - 7 Q 4 5 $\blacklozenge$ E 0 $\blacksquare$ 2 1
	4000 K	1250 lm	95 lm/W	0 9 0 - 7 Q 4 6 $\blacklozenge$ E 0 $\blacksquare$ 2 1

**FLOOD SQUARE 56°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1300 lm	99 lm/W	0 9 0 - 7 Q 4 4 $\blacklozenge$ F 0 $\blacksquare$ 2 1
	3000 K	1380 lm	105 lm/W	0 9 0 - 7 Q 4 5 $\blacklozenge$ F 0 $\blacksquare$ 2 1
	4000 K	1480 lm	113 lm/W	0 9 0 - 7 Q 4 6 $\blacklozenge$ F 0 $\blacksquare$ 2 1

**WIDE FLOOD SQUARE 71°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1330 lm	102 lm/W	0 9 0 - 7 Q 4 4 $\blacklozenge$ G 0 $\blacksquare$ 2 1
	3000 K	1420 lm	108 lm/W	0 9 0 - 7 Q 4 5 $\blacklozenge$ G 0 $\blacksquare$ 2 1
	4000 K	1520 lm	116 lm/W	0 9 0 - 7 Q 4 6 $\blacklozenge$ G 0 $\blacksquare$ 2 1

**WALLWASHER chrome reflector, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1130 lm	86 lm/W	0 9 0 - 7 Q 4 4 $\blacklozenge$ A 0 0 2 1
	3000 K	1200 lm	92 lm/W	0 9 0 - 7 Q 4 5 $\blacklozenge$ A 0 0 2 1
	4000 K	1290 lm	98 lm/W	0 9 0 - 7 Q 4 6 $\blacklozenge$ A 0 0 2 1

**CORRIDOR chrome reflector, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1130 lm	86 lm/W	0 9 0 - 7 Q 4 4 $\blacklozenge$ A 0 0 2 2
	3000 K	1200 lm	92 lm/W	0 9 0 - 7 Q 4 5 $\blacklozenge$ A 0 0 2 2
	4000 K	1290 lm	98 lm/W	0 9 0 - 7 Q 4 6 $\blacklozenge$ A 0 0 2 2

**WALLWASHER FLOOR CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1180 lm	90 lm/W	0 9 0 - 7 Q 4 4 $\blacklozenge$ W 0 $\blacksquare$ 2 1
	3000 K	1250 lm	95 lm/W	0 9 0 - 7 Q 4 5 $\blacklozenge$ W 0 $\blacksquare$ 2 1
	4000 K	1340 lm	102 lm/W	0 9 0 - 7 Q 4 6 $\blacklozenge$ W 0 $\blacksquare$ 2 1

**WALL + FLOOR chrome reflector, CRI ≥ 90**

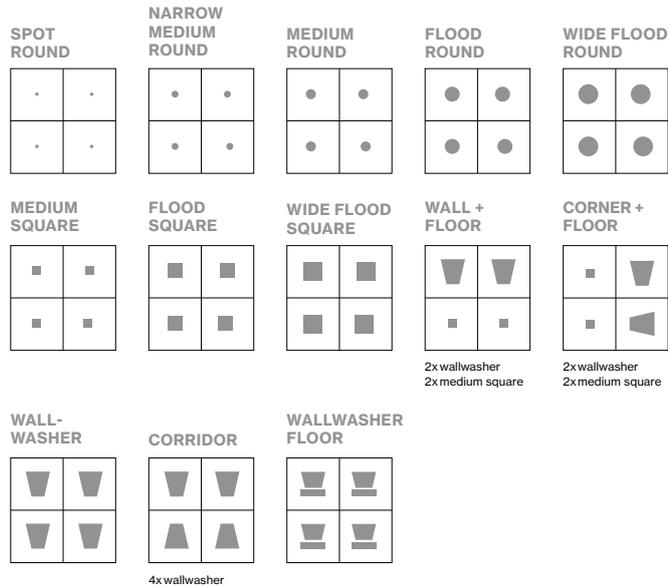

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1110 lm	85 lm/W	0 9 0 - 7 Q 4 4 $\blacklozenge$ 9 0 0 2 1
	3000 K	1180 lm	90 lm/W	0 9 0 - 7 Q 4 5 $\blacklozenge$ 9 0 0 2 1
	4000 K	1270 lm	97 lm/W	0 9 0 - 7 Q 4 6 $\blacklozenge$ 9 0 0 2 1

**Order options**

CONTROL	$\blacklozenge$	COLOUR	$\blacksquare$	COLOUR	
non DIM	1	black reflector	B	jet black	RAL 9005
DALI-2	3	chrome reflector	O	traffic white	RAL 9016


**CORNER + FLOOR** chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.1 W	2700 K	1110 lm	85 lm/W	0 9 0 - 7 Q 4 4  9 0 0 2 2
	3000 K	1180 lm	90 lm/W	0 9 0 - 7 Q 4 5  9 0 0 2 2
	4000 K	1270 lm	97 lm/W	0 9 0 - 7 Q 4 6  9 0 0 2 2

**Planning Information**

**Electrical mounting accessories (optional)**

**THROUGH WIRING CONNECTION BOX**


TYPE	L-W-H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105-58-30	0 0 5 - 2 5 3 1 1 1 0
DALI cable ø 4 – 12 mm	105-58-30	0 0 5 - 2 5 5 1 1 1 0

Linect®-Ready

**Mounting accessories (required)**

**MOUNTING SET trimless** for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L-W-H (mm)	ORDER CODE
12.5/15/20/25 mm	47-47-47	0 9 0 - 7 Q 1 0 1 0 0

for UNICO Q1


**MOUNTING SET trimless** for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L-W-H (mm)	ORDER CODE
12.5/15/20/25 mm	85-85-47	0 9 0 - 7 Q 4 0 1 0 0

for UNICO Q4 | UNICO wall recessed 2 lamps

**Order options**

CONTROL	COLOUR	<input checked="" type="checkbox"/> COLOUR	ORDER CODE
non DIM	1 black reflector	B jet black	RAL 9005
DALI-2	3 chrome reflector	0 traffic white	RAL 9016

**MOUNTING SET with trim** for intermediate ceilings, 2-25 mm

COLOUR	L-W-H (mm)	ORDER CODE
jet black	63-63-30	0 9 0 - 7 Q 1 0 2 0 B
traffic white	63-63-30	0 9 0 - 7 Q 1 0 2 0 W

for UNICO Q1

**MOUNTING SET with trim** for intermediate ceilings, 2-25 mm

COLOUR	L-W-H (mm)	ORDER CODE
jet black	101-101-30	0 9 0 - 7 Q 4 0 2 0 B
traffic white	101-101-30	0 9 0 - 7 Q 4 0 2 0 W

for UNICO Q4 | UNICO wall recessed 2 lamps

**Order options**

CONTROL		COLOUR		COLOUR	
non DIM	1	black reflector	<input checked="" type="checkbox"/>	jet black	RAL 9005
DALI-2	3	chrome reflector	<input type="checkbox"/>	traffic white	RAL 9016

# De House, Saint Niklaas

Belgique

## Architecte

Jacobsen Architectura

## Lighting Design

Rodrigo Jardim  
(Illumination Strategic  
Design Group)

## Photographe

Didier Engels Fernando  
Guerra FG+SG



## Produits utilisés



**UNICO Q1 / Q4  
recessed**



**UNICO Q1 / Q4 basic  
recessed**

