

UNICO Q9 basic

recessed

EN Square recessed multi-downlight made of die-cast aluminium; equipped with nine individually selectable or pre-specified, customised light elements; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25mm; surface powder coated; installation possible in different housings; high-quality reflector with micro-faceted, aluminium-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

FR Multi-Downlight carré en aluminium moulé sous pression pour encastrément ; équipé de neuf éléments optiques à choisir de façon personnalisée ou définis de manière fixe, spécifiques à chaque application ; montage sans outil en kit de montage par système à dé clic à bille ; installation électrique facile par enfichage protégé contre les inversions de polarité ; convient aux épaisseurs de plafond de 2-25 mm ; surface thermolaquée ; encastrément possible dans différents boîtiers ; réflecteur de grande qualité avec surface à microfacettes, métallisée à l'aluminium ; caractéristique de diffusion précise avec différentes possibilités de répartitions symétriques de la lumière ; ou avec distribution asymétrique de la lumière ; High-Power-LED à grande efficacité énergétique, très bon rendu des couleurs ; sans distorsions

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
 UGR \leq 10, UGR \leq 16, UGR \leq 19
 jusqu'à 143 lm/W
 L85 / 50000 h, L90 / 50000 h
 DALI-2, non DIM
 front IP20

Types

trim



□ 138

trimless



□ 122

Couleur




Set de montage



Répartition de la lumière



Diia® standards
 251, 252, 253




one luminaire
 multiple scenes





plug / socket
 connector



black & gold
 reflector
 (optional)



tunable white
 2700 – 5000 K
 (optional)



□ 119

UNICO Q9 basic high efficient



FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
24.8 W	2700 K	3090 lm	125 lm/W	0 9 0 - 7 Q 9 9 ◆ C 0 ■ 3 1
	3000 K	3090 lm	125 lm/W	0 9 0 - 7 Q 9 0 ◆ C 0 ■ 3 1
	3500 K	3220 lm	130 lm/W	0 9 0 - 7 Q 9 2 ◆ C 0 ■ 3 1
	4000 K	3280 lm	132 lm/W	0 9 0 - 7 Q 9 1 ◆ C 0 ■ 3 1

WIDE FLOOD ROUND 71°, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
24.8 W	2700 K	3180 lm	128 lm/W	0 9 0 - 7 Q 9 9 ◆ D 0 ■ 3 1
	3000 K	3180 lm	128 lm/W	0 9 0 - 7 Q 9 0 ◆ D 0 ■ 3 1
	3500 K	3310 lm	133 lm/W	0 9 0 - 7 Q 9 2 ◆ D 0 ■ 3 1
	4000 K	3370 lm	136 lm/W	0 9 0 - 7 Q 9 1 ◆ D 0 ■ 3 1

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
24.8 W	2700 K	3240 lm	131 lm/W	0 9 0 - 7 Q 9 9 ◆ F 0 ■ 3 1
	3000 K	3240 lm	131 lm/W	0 9 0 - 7 Q 9 0 ◆ F 0 ■ 3 1
	3500 K	3380 lm	136 lm/W	0 9 0 - 7 Q 9 2 ◆ F 0 ■ 3 1
	4000 K	3450 lm	139 lm/W	0 9 0 - 7 Q 9 1 ◆ F 0 ■ 3 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
24.8 W	2700 K	3330 lm	134 lm/W	0 9 0 - 7 Q 9 9 ◆ G 0 ■ 3 1
	3000 K	3330 lm	134 lm/W	0 9 0 - 7 Q 9 0 ◆ G 0 ■ 3 1
	3500 K	3470 lm	140 lm/W	0 9 0 - 7 Q 9 2 ◆ G 0 ■ 3 1
	4000 K	3540 lm	143 lm/W	0 9 0 - 7 Q 9 1 ◆ G 0 ■ 3 1



□ 119

UNICO Q9 basic



SPOT ROUND 15°, chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	1860 lm	62 lm/W	0 9 0 - 7 Q 9 4 ◆ K 0 0 2 1
	3000 K	1990 lm	67 lm/W	0 9 0 - 7 Q 9 5 ◆ K 0 0 2 1
	4000 K	2130 lm	71 lm/W	0 9 0 - 7 Q 9 6 ◆ K 0 0 2 1

Order options

CONTROL	◆	COLOUR	■	COLOUR	
non DIM	1	black reflector	B	jet black	RAL 9005
DALI-2	3	chrome reflector	0	traffic white	RAL 9016

NARROW MEDIUM ROUND 22°, chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	1900 lm	64 lm/W	0 9 0 - 7 Q 9 4 ◆ N 0 0 2 1
	3000 K	2020 lm	68 lm/W	0 9 0 - 7 Q 9 5 ◆ N 0 0 2 1
	4000 K	2170 lm	73 lm/W	0 9 0 - 7 Q 9 6 ◆ N 0 0 2 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2530 lm	85 lm/W	0 9 0 - 7 Q 9 4 ◆ B 0 2 1
	3000 K	2700 lm	90 lm/W	0 9 0 - 7 Q 9 5 ◆ B 0 2 1
	4000 K	2900 lm	97 lm/W	0 9 0 - 7 Q 9 6 ◆ B 0 2 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2910 lm	97 lm/W	0 9 0 - 7 Q 9 4 ◆ C 0 2 1
	3000 K	3100 lm	104 lm/W	0 9 0 - 7 Q 9 5 ◆ C 0 2 1
	4000 K	3330 lm	111 lm/W	0 9 0 - 7 Q 9 6 ◆ C 0 2 1

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2890 lm	97 lm/W	0 9 0 - 7 Q 9 4 ◆ D 0 2 1
	3000 K	3080 lm	103 lm/W	0 9 0 - 7 Q 9 5 ◆ D 0 2 1
	4000 K	3300 lm	110 lm/W	0 9 0 - 7 Q 9 6 ◆ D 0 2 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2490 lm	83 lm/W	0 9 0 - 7 Q 9 4 ◆ E 0 2 1
	3000 K	2650 lm	89 lm/W	0 9 0 - 7 Q 9 5 ◆ E 0 2 1
	4000 K	2850 lm	95 lm/W	0 9 0 - 7 Q 9 6 ◆ E 0 2 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2960 lm	99 lm/W	0 9 0 - 7 Q 9 4 ◆ F 0 2 1
	3000 K	3160 lm	106 lm/W	0 9 0 - 7 Q 9 5 ◆ F 0 2 1
	4000 K	3390 lm	113 lm/W	0 9 0 - 7 Q 9 6 ◆ F 0 2 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	3040 lm	102 lm/W	0 9 0 - 7 Q 9 4 ◆ G 0 2 1
	3000 K	3240 lm	108 lm/W	0 9 0 - 7 Q 9 5 ◆ G 0 2 1
	4000 K	3480 lm	116 lm/W	0 9 0 - 7 Q 9 6 ◆ G 0 2 1

Order options

CONTROL	◆	COLOUR	■	COLOUR	
non DIM	1	black reflector	B	jet black	RAL 9005
DALI-2	3	chrome reflector	0	traffic white	RAL 9016

WALLWASHER chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2580 lm	86 lm/W	0 9 0 - 7 Q 9 4 A 0 0 2 1
	3000 K	2740 lm	92 lm/W	0 9 0 - 7 Q 9 5 A 0 0 2 1
	4000 K	2950 lm	99 lm/W	0 9 0 - 7 Q 9 6 A 0 0 2 1

WALLWASHER FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2690 lm	90 lm/W	0 9 0 - 7 Q 9 4 W 0 2 1
	3000 K	2860 lm	96 lm/W	0 9 0 - 7 Q 9 5 W 0 2 1
	4000 K	3070 lm	103 lm/W	0 9 0 - 7 Q 9 6 W 0 2 1

WALL + FLOOR chrome reflector, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2830 lm	95 lm/W	0 9 0 - 7 Q 9 4 9 0 0 2 1
	3000 K	3020 lm	101 lm/W	0 9 0 - 7 Q 9 5 9 0 0 2 1
	4000 K	3240 lm	108 lm/W	0 9 0 - 7 Q 9 6 9 0 0 2 1

3x wallwasher 6x flood square

WALL + CORRIDOR chrome reflector, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.9 W	2700 K	2570 lm	86 lm/W	0 9 0 - 7 Q 9 4 9 0 0 2 2
	3000 K	2740 lm	92 lm/W	0 9 0 - 7 Q 9 5 9 0 0 2 2
	4000 K	2940 lm	98 lm/W	0 9 0 - 7 Q 9 6 9 0 0 2 2

6x wallwasher, 3x rectangular

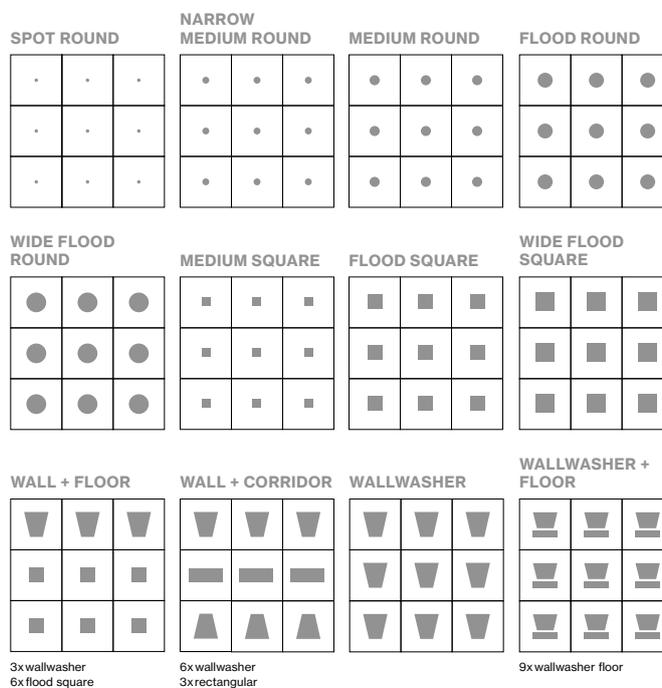Planning Information**Order options**

CONTROL		COLOUR		COLOUR
non DIM	1	black reflector	B	jet black RAL 9005
DALI-2	3	chrome reflector	0	traffic white RAL 9016

Electrical mounting accessories (optional)




THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105-58-30	0 0 5 - 2 5 3 1 1 1 0
DALI cable ø 4 – 12 mm	105-58-30	0 0 5 - 2 5 5 1 1 1 0

Linect®-Ready

Mounting accessories (required)




MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS

12.5/15/20/25 mm

for UNICO Q9

L-W-H (mm)	ORDER CODE
122-122-47	0 9 0 - 7 Q 9 0 1 0 0



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR

jet black

traffic white

for UNICO Q9

L-W-H (mm)	ORDER CODE
138-138-30	0 9 0 - 7 Q 9 0 2 0 B
138-138-30	0 9 0 - 7 Q 9 0 2 0 W

Order options

CONTROL		COLOUR		COLOUR	
non DIM	1	black reflector	B	jet black	RAL 9005
DALI-2	3	chrome reflector	0	traffic white	RAL 9016

Aertssen Group, Beveren

Belgique

Architecte
Mertens Architecten

Lighting Design
Eef Debeuf

Photographe
Kris Dekeijser



Produits utilisés



UNICO L2 / L3
recessed



UNICO Q9 recessed



SPOTLINE MOVE IT
25



MOVE IT 25 surface /
suspended system



JUST 45 MOVE IT
25 / 25 S / 45



UNICO L2 / L3 basic
recessed



UNICO Q9 basic
recessed



MINO 60 CIRCLE
suspended





