



SASSO 100 round

suspended


EN Cylindrical spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; pendant fitting with cable suspension; incl. feed (black or white); can be individually shortened; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy

FR Spot cylindrique en aluminium ; surface de l'insert d'éclairage peinte ; surface du boîtier thermolaquée ; suspension par câble ; câble d'alimentation inclus (noir ou blanche) ; recoupable à volonté ; caractéristiques de rayonn. précises grâce à l'optique à lentille ; Technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; convertisseur inclus dans le cache-piton

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90 / 2 SDCM (initial MacAdam)
 UGR \leq 13, UGR \leq 16, UGR \leq 19
 jusqu'à 99 lm/W
 L80 / 50000 h
 DALI-2, non DIM
 IP20

Types

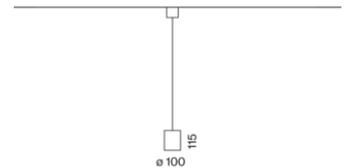

Couleur



Couleur intérieure



Répartition de la lumière



glare control
(UGR \leq 16)



easy mounting
no visible
screws



CRI \geq 95 2
SDCM
(optional)



SASSO 100 round downlight suspended



SPOT 19°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1430 lm	80 lm/W	0 4 8 - 3 4 2 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3000 K	1480 lm	83 lm/W	0 4 8 - 3 4 2 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	1510 lm	84 lm/W	0 4 8 - 3 4 2 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	1550 lm	87 lm/W	0 4 8 - 3 4 2 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S

The data values for the luminous flux may differ for specific order options by -6%. Luminous flux value refers to inner colour traffic white.



MEDIUM 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1440 lm	80 lm/W	0 4 8 - 3 4 2 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3000 K	1480 lm	83 lm/W	0 4 8 - 3 4 2 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	1520 lm	85 lm/W	0 4 8 - 3 4 2 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	1550 lm	87 lm/W	0 4 8 - 3 4 2 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M

The data values for the luminous flux may differ for specific order options by -7%. Luminous flux value refers to inner colour traffic white.

FLOOD 44°-45°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1600 lm	89 lm/W	0 4 8 - 3 4 2 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3000 K	1650 lm	92 lm/W	0 4 8 - 3 4 2 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	1690 lm	94 lm/W	0 4 8 - 3 4 2 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	1720 lm	96 lm/W	0 4 8 - 3 4 2 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F

WIDE FLOOD 65°-66°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1640 lm	92 lm/W	0 4 8 - 3 4 2 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3000 K	1700 lm	95 lm/W	0 4 8 - 3 4 2 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3500 K	1730 lm	97 lm/W	0 4 8 - 3 4 2 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	4000 K	1770 lm	99 lm/W	0 4 8 - 3 4 2 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W

Optical accessories (optional)



HONEYCOMB LOUVER for BO 55 | JUST 55 | SASSO 100

COLOUR	Ø-H (mm)	ORDER CODE
jet black	50-3	0 0 7 - 1 9 6 5 5 9 8

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9

Waterdrop Headquarters, Vienna

Autriche

Architecte
AllesWirdGut
Architekten

Photographe
tschinkersten fotografie




Produits utilisés



SASSO 100 round ceiling



SASSO 100 round suspended



JANE semi-recessed / surface / suspended



BETO suspended

