


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
jusqu'à 105 lm/W
L90 / 100000 h
DALI-2, non DIM
IP20

Types



Colours

Couleur intérieure

Répartition de la lumière

SASSO 100 round

suspended

EN Cylindrical spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; pendant fitting with cable suspension; incl. feed (black or white); can be individually shortened; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy

FR Spot cylindrique en aluminium ; surface de l'insert d'éclairage peinte ; surface du boîtier thermolaquée ; suspension par câble ; câble d'alimentation inclus (noir ou blanche) ; recoupable à volonté ; caractéristiques de rayonn. précises grâce à l'optique à lentille ; Technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; convertisseur inclus dans le cache-piton



glare control
(UGR ≤ 16)



easy mounting
no visible
screws




CRI ≥ 95 2
SDCM
(optional)



SASSO 100 round downlight suspended

CRI ≥ 90 | 2 SDCM | UGR ≤ 13 | cd/m² ≤ 1500 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



SPOT 19°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1430 lm	80 lm/W	0 4 8 - 3 4 2 0 9 S
	3000 K	1480 lm	83 lm/W	0 4 8 - 3 4 2 0 0 S
	3500 K	1510 lm	84 lm/W	0 4 8 - 3 4 2 0 2 S
	4000 K	1550 lm	87 lm/W	0 4 8 - 3 4 2 0 1 S

The data values for the luminous flux of fraction may differ for specific order options by -6%. Luminous flux value refers to inner colour traffic white.

MEDIUM 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1440 lm	80 lm/W	0 4 8 - 3 4 2 0 9 M
	3000 K	1480 lm	83 lm/W	0 4 8 - 3 4 2 0 0 M
	3500 K	1520 lm	85 lm/W	0 4 8 - 3 4 2 0 2 M
	4000 K	1550 lm	87 lm/W	0 4 8 - 3 4 2 0 1 M

The data values for the luminous flux of fraction may differ for specific order options by -7%. Luminous flux value refers to inner colour traffic white.

FLOOD 44°-45°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1600 lm	89 lm/W	0 4 8 - 3 4 2 0 9 F
	3000 K	1650 lm	92 lm/W	0 4 8 - 3 4 2 0 0 F
	3500 K	1690 lm	94 lm/W	0 4 8 - 3 4 2 0 2 F
	4000 K	1720 lm	96 lm/W	0 4 8 - 3 4 2 0 1 F

WIDE FLOOD 54°-56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1740 lm	97 lm/W	0 4 8 - 3 4 2 0 9 W
	3000 K	1790 lm	100 lm/W	0 4 8 - 3 4 2 0 0 W
	3500 K	1830 lm	102 lm/W	0 4 8 - 3 4 2 0 2 W
	4000 K	1880 lm	105 lm/W	0 4 8 - 3 4 2 0 1 W

Optical accessories



HONEYCOMB LOUVER for BO 55 | JUST 55 | SASSO 100

COLOUR	Ø·H (mm)	ORDER CODE
jet black	50·3	0 0 7 - 1 9 6 5 5 9 8

Order options

CONTROL	
non DIM	1
DALI-2	3

COLOUR	
jet black RAL 9005	1
traffic white RAL 9016	7

INNER COLOUR	
jet black RAL 9005	1
matt silver	4
traffic white RAL 9016	7
gold dust RAL 260-M	9

Waterdrop Headquarters, Vienna


Autriche

Architecte
AllesWirdGut
Architekten

Photographe
tschinkersten fotografie



Produits utilisés



JANE semi-recessed / surface / suspended



BETO suspended




SASSO 100 round ceiling




SASSO 100 round suspended

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


waterdrop

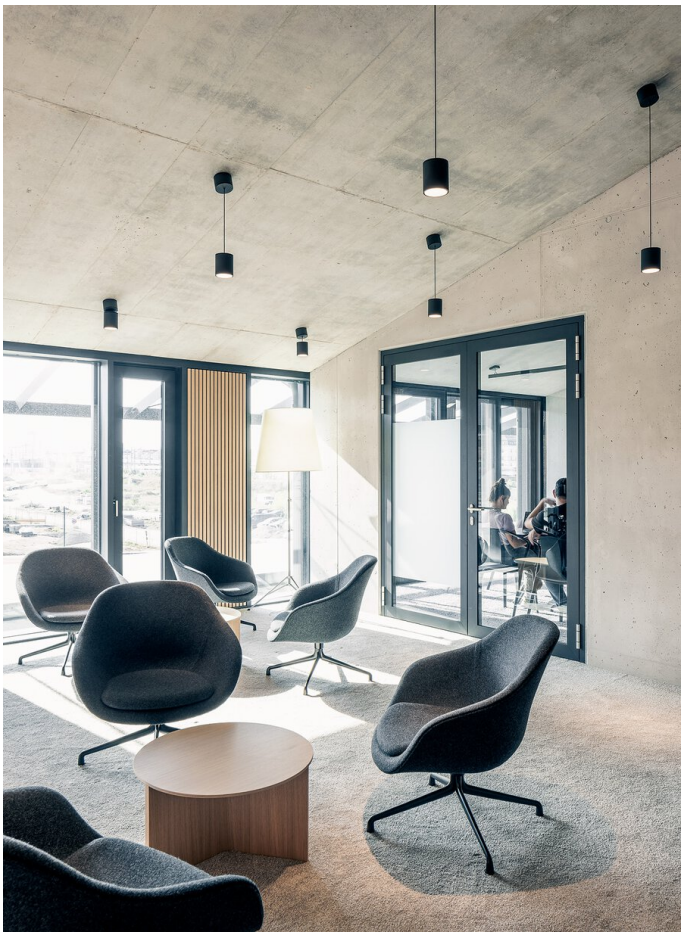

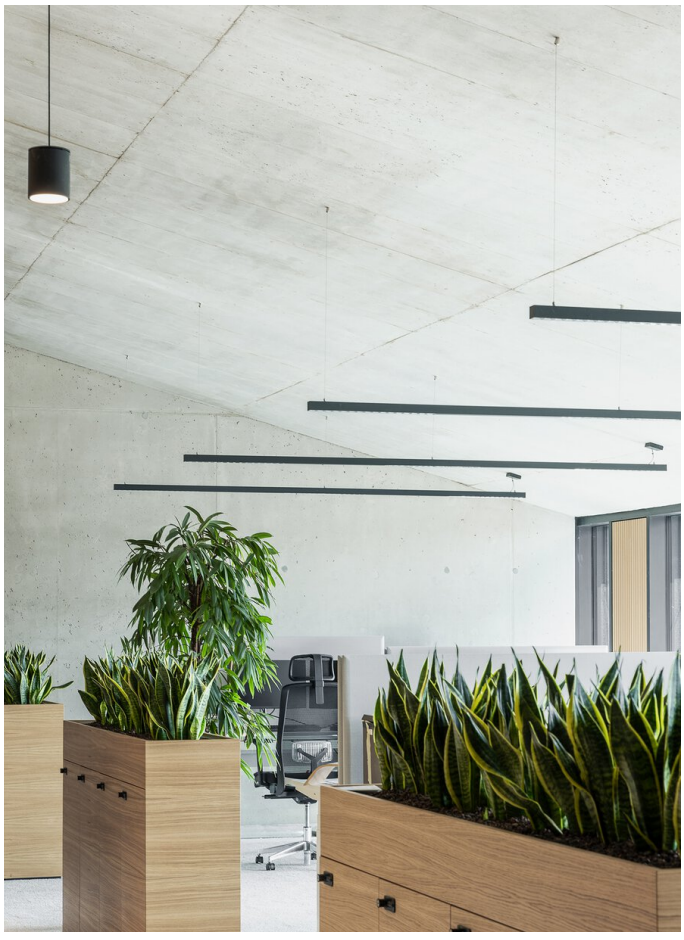
























EG
0

