


Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
UGR ≤ 19
jusqu'à ↓ 5 290 lm / ↑ 5 230 lm
jusqu'à 159 lm/W
L85 / 50000 h
Cache : Microprismatic
DALI-2, capteur autonome ESSENTIAL
IP20

Types



Colours



Répartition de la lumière



SONIC


suspended

EN Conical light housing in die-cast aluminium; surface powder coated; pendant fitting with cable suspension; with integrated toolless suspension height adjustment; incl. feeder cable or with height adjustable rod suspension (chrome), feed in rod; direct / indirect light distribution; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; Acoustic elements made of high quality, self-supporting, at least 75% recycled PET felt (high acoustic performance by doubling the material) or as an acoustically effective lampshade (large selection of colours) with sound absorbing properties available

FR Corps de luminaire conique en fonte d'aluminium injectée ; surface thermolaquée ; suspension par câble ; réglage en hauteur sans outil au luminaire ; incl. conduit d'alimentation ou avec suspension pouvant être raccourcie (chrome), conduit d'alimentation dans le tube de suspension ; caractéristique de rayonnement direct / indirect ; partie indirecte avec platines dédiées pour un flux lumineux accru et un éclairage maximal du plafond ; éclairage parfaitement homogène ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; Éléments acoustiques en feutre PET recyclé à 75% au moins, autoportant, haute qualité (performances acoustiques élevées grâce à un matériau doublé) ou comme abat-jour à effet acoustique (large sélection de couleurs) doué de propriétés insonorisantes disponible



DiiA® standards
251, 252, 253



microprismatic
UGR ≤ 19



sensor version
available




acoustic
absorber




direct / indirect
illumination










SONIC suspended

CRI ≥ 80 | UGR ≤ 19 | 220-240 V | 1 ADDR. | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT CRI ≥ 80

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
66.0 W	3000 K	↧5000/↥4940 lm	151 lm/W	0 5 9 - 7 ♁ 2 1 5 ◆ ◪ P
	4000 K	↧5290/↥5230 lm	159 lm/W	0 5 9 - 7 ♁ 2 1 6 ◆ ◪ P

Planning Information

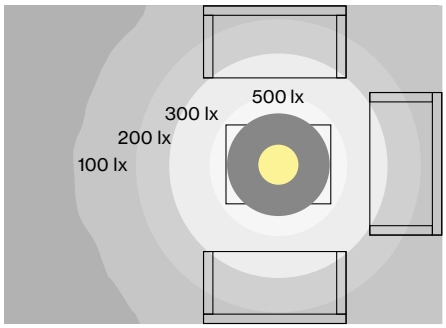



SONIC suspended, 69 W, 4000 K
direct / indirect with absorber

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8
Mounting height	2.25 m

CALCULATION SURFACE


Surface dimensions	Floor
Surface height	0.5 m

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19

Acoustic accessories



ABSORBER RING 1050


COLOUR	Ø·H (mm)	ORDER CODE
anthracite	1050·50	0 5 9 - 7 7 1 1 2 1 B
marble grey	1050·50	0 5 9 - 7 7 1 1 2 1 D
black	1050·50	0 5 9 - 7 7 1 1 2 1 L
limestone	1050·50	0 5 9 - 7 7 1 1 2 1 S
white	1050·50	0 5 9 - 7 7 1 1 2 1 W
felt grey	1050·50	0 5 9 - 7 7 1 1 2 1 G

only in combination with SONIC suspended or SONIC free standing

Order options

MOUNTING ♁	CONTROL ◆	COLOUR ◪	COLOUR
cable 1500 mm (min. 500 mm) 2	DALI-2 3	black grey RAL 7021 6	marble grey RAL 7047
rod 1000 mm 4	stand alone ESSENTIAL sensor 7	pure white RAL 9010 7	felt grey RAL 7037
		special colours X	limestone RAL 070 70 20
			anthracite RAL 7021


ABSORBER RING 1280



COLOUR	Ø·H (mm)	ORDER CODE
anthracite	1280·50	0 5 9 - 7 7 1 1 1 1 B
marble grey	1280·50	0 5 9 - 7 7 1 1 1 1 D
black	1280·50	0 5 9 - 7 7 1 1 1 1 L
limestone	1280·50	0 5 9 - 7 7 1 1 1 1 S
white	1280·50	0 5 9 - 7 7 1 1 1 1 W
felt grey	1280·50	0 5 9 - 7 7 1 1 1 1 G

only in combination with SONIC suspended or SONIC free standing

SOUNDCAP



COLOUR	Ø·H (mm)	ORDER CODE
marble grey	527·300	0 5 9 - 7 7 3 1 1 1 D
felt grey	527·300	0 5 9 - 7 7 3 1 1 1 G
black	527·300	0 5 9 - 7 7 3 1 1 1 L
white	527·300	0 5 9 - 7 7 3 1 1 1 W
acoustic special colours	527·300	0 5 9 - 7 7 3 1 1 1 X
limestone	527·300	0 5 9 - 7 7 3 1 1 1 S
anthracite	527·300	0 5 9 - 7 7 3 1 1 1 B

only in combination with SONIC suspended or SONIC free standing; bracket colour white; other bracket colours on request

Order options

COLOUR	
marble grey	RAL 7047
felt grey	RAL 7037
limestone	RAL 070 70 20
anthracite	RAL 7021

C&P Immobilien AG

Autriche

Architecte
INNOCAD Architecture,
Graz

Lighting Design
INNOCAD Architecture,
Graz

Photographe
Paul Ott



Produits utilisés



SONIC suspended




MINO 60 ceiling / suspended system




SASSO 100 round adjustable recessed 1 lamp



SASSO 100 round downlight recessed 1 lamp



SASSO 100 round wallwasher recessed 1 lamp




SASSO 100 round wallwasher/floor recessed 1 lamp

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com





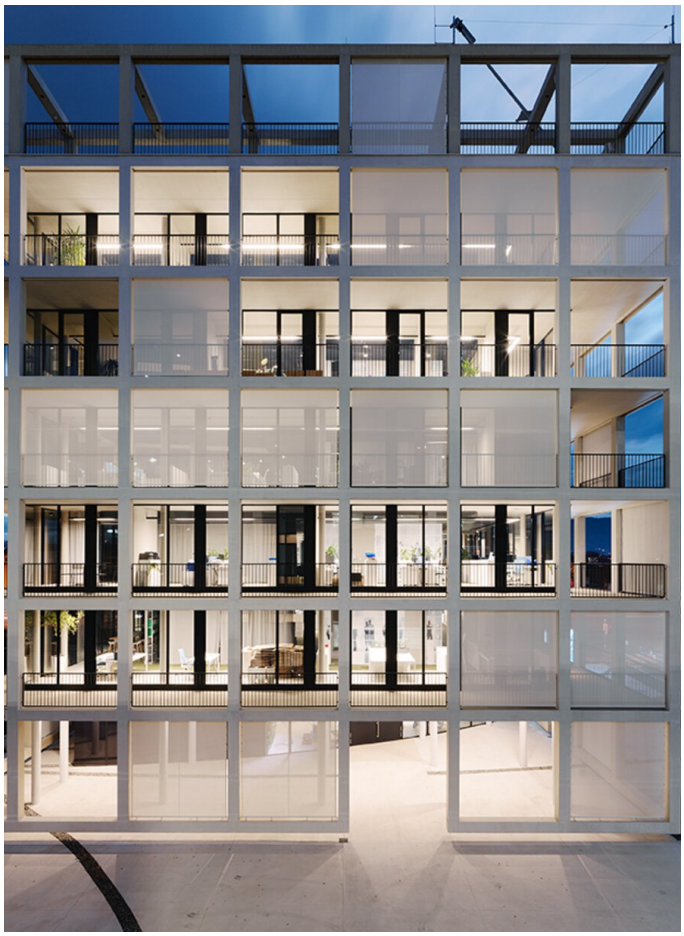



MERCEDES BENZ Lounge

Suisse

Architecte
Kauffmann Theilig & Partner

Lighting Design
TLD Planungsgruppe GmbH

Photographe
Andreas Keller Fotografie



Produits utilisés



SONIC suspended

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


Inspiration
Création
Impulsion