
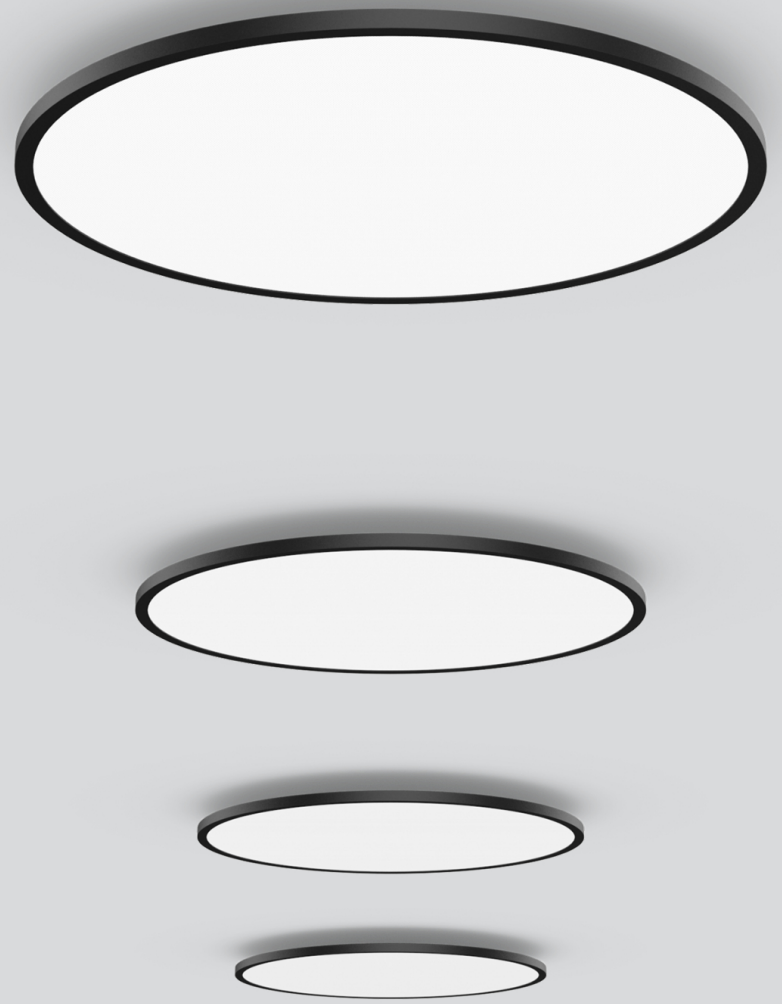


Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 19
jusqu'à 138 lm/W
L90 / 50000 h
Cache : Microprismatic
DALI-2
IP40

Types



Colours

Répartition de la lumière





DiiA® standards
251, 252, 253




DIN EN 12464-1
UGR ≤ 19



easy mounting
by click-
mechanism



acoustic
elements




CRI ≥ 98
XPECTRUM
(optional)

TASK round

surface

EN Round luminaire housing in aluminium; ultra low-profile design (only 15 mm); surface powder coated; convenient quick mounting system without tools; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; luminaire with 2 cable openings and plug-in terminals for through wiring; sound absorbing accessories available

FR Corps de luminaire rond en aluminium ; forme extrêm. plate (15 mm seulement) ; surface thermolaquée ; système de montage rapide, convivial et sans outil ; distribution de lumière directe par LGP-Body (Light Guiding Prism) ; lumière couplée latéralement guidée vers le bas par gravure laser ; guidage lumière au moyen de matériau réflecteur hautement réfléchissant ; éclairage parfaitement homogène ; LED économes en énergie à restitution de couleur élevée ; luminaire avec 2 ouvertures câblage et borne enfichable pour câblage passant ; accessoires doté de propriétés d'absorption acoustique




TASK 300 round surface

CRI ≥ 90 | UGR ≤ 19 | cd/m² ≤3000 | 220-240 V | 1 ADDR. | IP 40 | X-PERT | X-PERT

MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.5 W	3000 K	1020 lm	97 lm/W	059-015003 P
	4000 K	1080 lm	103 lm/W	059-015013 P






TASK 450 round surface

CRI ≥ 90 | UGR ≤ 19 | cd/m² ≤3000 | 220-240 V | 1 ADDR. | IP 40 | X-PERT | X-PERT

MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
16.0 W	3000 K	1750 lm	109 lm/W	059-014103 P
	4000 K	1860 lm	116 lm/W	059-014113 P
22.8 W	3000 K	2400 lm	105 lm/W	059-015103 P
	4000 K	2560 lm	112 lm/W	059-015113 P






TASK 600 round surface

CRI ≥ 90 | UGR ≤ 19 | cd/m² ≤3000 | 220-240 V | 1 ADDR. | IP 40 | X-PERT | X-PERT


MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.6 W	3000 K	3470 lm	117 lm/W	059-014203 P
	4000 K	3690 lm	125 lm/W	059-014213 P
39.0 W	3000 K	4350 lm	112 lm/W	059-015203 P
	4000 K	4630 lm	119 lm/W	059-015213 P



Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
special colours	X






TASK 900 round surface


CRI ≥ 90 | UGR ≤ 19 | cd/m² ≤3000 | 220-240 V | 1 ADDR. | IP 40 | X-PERT | X-PERT

MICROPRISMATIC | DIRECT CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
51.0 W	3000 K	6630 lm	130 lm/W	0 5 9 - 0 1 4 3 0 3 ◪ K
	4000 K	7060 lm	138 lm/W	0 5 9 - 0 1 4 3 1 3 ◪ K

Planning Information

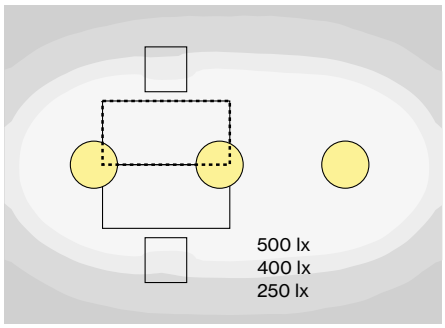

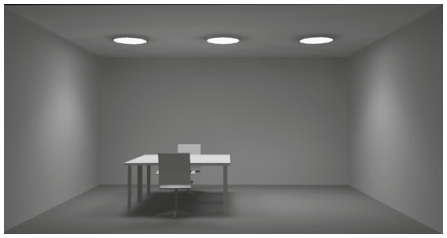

TASK 600 round surface
30 W, 4000 K, direct

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8

CALCULATION SURFACE ·····

Surface dimensions	1.6 × 0.8 m
Surface height	0.75 m
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19

≥ 65° ≤ 3000 cd/m²

Order options

COLOUR ◪	
pure white RAL 9010	7
jet black RAL 9005	8
special colours	X