



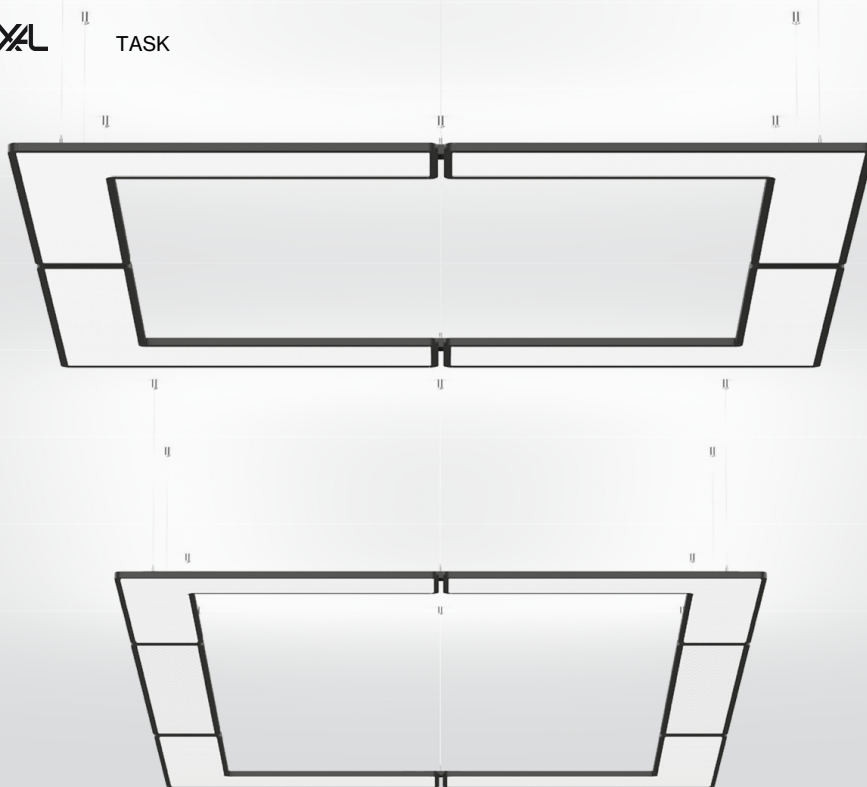

Quickinfo

4000 K
 CRI ≥ 90 / 3 SDCM (initial MacAdam)
 UGR ≤ 19
 jusqu'à ↓ 22 100 lm / ↑ 11 500 lm
 jusqu'à 120 lm/W
 L90 / 50 000 h
 Cache : Microprismatic
 DALI-2
 IP20

Types



Colours



Répartition de la lumière



TASK angular

suspended

EN Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; Luminaire housing made of aluminium with rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, toolless height adjustment; convenient quick mounting system without tools; incl. feeder cable; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; optional acoustic elements available


FR Luminaire suspendu circulaire, composé d'éléments individuels en forme de L ou de rectangle ; Corps du luminaire en aluminium avec bords arrondis ; forme extrêm. plate (15 mm seulement) ; surface thermolaquée ; suspension à câble réglable en hauteur sans outil ; système de montage rapide, convivial et sans outil ; incl. conduit d'alimentation ; distribution de lumière directe par LGP-Body (Light Guiding Prism) ; lumière couplée latéralement guidée vers le bas par gravure laser ; partie indirecte avec platines dédiées pour un flux lumineux accru et un éclairage maximal du plafond ; éclairage parfaitement homogène ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; en option : éléments acoustiques disponible




DiiA® standards
251, 252, 253




clicksystem



microprismatic
UGR ≤ 19



CRI ≥ 98
XPECTRUM
(optional)





TASK angular suspended



DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
197.0 W	4000 K	↓15500/↑18050 lm	120 lm/W	0 5 9 - 5 2 8 3 1 3 ☒ K




TASK long angular suspended




DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
282.0 W	4000 K	↓22100/↑11500 lm	119 lm/W	0 5 9 - 5 2 8 4 1 3 ☒ K



Planning Information

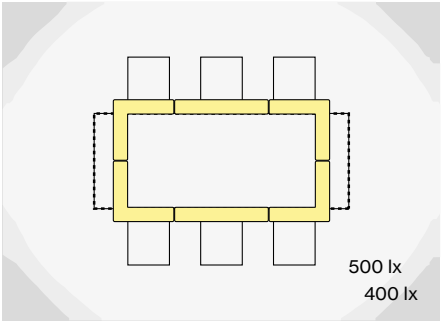

TASK long angular, 280 W, 4000 K, direct/indirect power

ROOM VALUES	
Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Suspension height	2.25 m

CALCULATION SURFACE	
Surface dimensions	3.2 × 1.2 m
Surface height	0.75 m
Average illuminance (E _m)	> 500 lx
Uniformity (U ₀)	> 0.6

GLARE EVALUATION	
Table Classification X=4H Y=8H S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19




Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8


Community Windpower, Frodsham

Royaume-Uni

Photographe
Paul Karalius

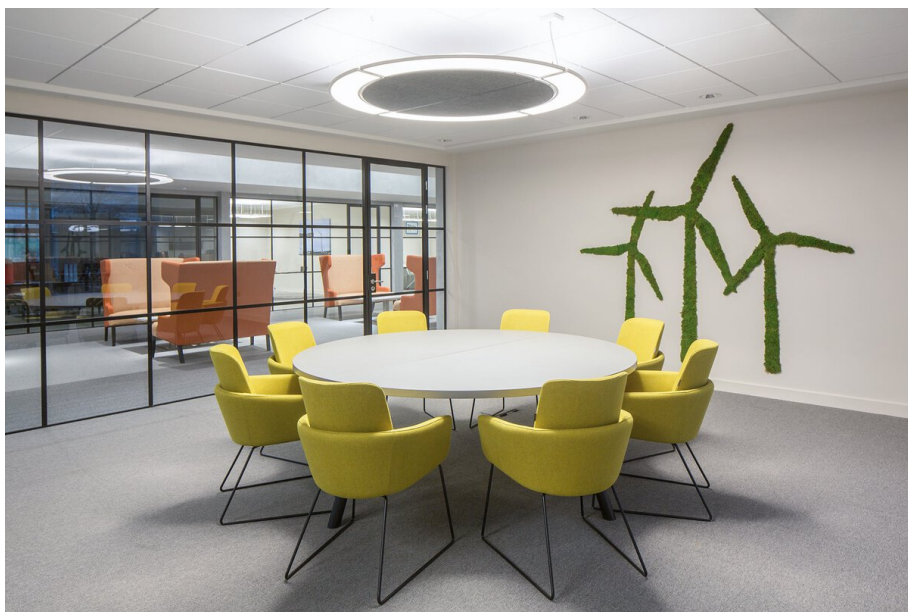


Produits utilisés



**TASK angular
suspended**



**TASK round
suspended**



**TASK circle
suspended**

