


Quickinfo

3500 K, tunable white 2700 - 5000 K
CRI ≥ 90, CRI ≥ 98 / 3 SDCM (initial MacAdam)
jusqu'à 58 lm/W
L80 / 50000 h, L85 / 50000 h
DALI-2
IP20

Types



Colours

Répartition de la lumière

PABLO colour tune / tunable white

EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter in spotlight housing; COB (Chip on Board) technology or CSP (Chip-Scale-Packaging) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; high quality aluminium reflector with spherical facet finish; high-gloss anodised; precise radiation characteristic with different light distributions; installed and exchanged without tools; optical attachments as accessories; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, available as an accessory

FR Spot sur rail en fonte d'aluminium injectée ; surface thermolaquée ; rotatif à 360° et orientable à 310° ; convertisseur dans boîtier de spot ; technologie COB (Chip on Board) ou CSP (Chip-Scale-Packaging) pour un rendement maximum ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; réflecteur de haute qualité en aluminium avec optique sphérique à facettes ; anodisé brillant ; caractéristique de diffusion précise avec différentes possibilités de répartitions de la lumière ; peut être installé ou changé sans outil ; eléments optiques comme accessoires ; adaptateur pour installation ou déplacement sans outil dans différents rails triphasés ; fixation de l'adaptateur au choix sans outils par vis moletée ou vis de serrage (tournevis nécessaire) ; point de sortie, au choix dans un un boîtier en saillie ou comme variante pour encastrement, disponible comme accessoire


compatible with MOVE IT PRO 45



DiiA® standards 251, 252, 253


360° rotatable, 310° tiltable


rotation lock


colour tune (3500 K red / blue)


tunable white 2700 – 5000 K




PABLO tunable white track

310° 360° | TUNABLE WHITE | CRI ≥98 | 220-240 V | DALI 2 ADDR. | X-PERT | X-PERT

MEDIUM 20°, 2700 - 5000 K, CRI ≥ 98, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
26.6 W	tunable w.	1140 lm	43 lm/W	1 8 0 - 5 6 ♁ 0 D 3 ◪ M



FLOOD 38°, 2700 - 5000 K, CRI ≥ 98, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
26.6 W	tunable w.	1080 lm	41 lm/W	1 8 0 - 5 6 ♁ 0 D 3 ◪ F

PABLO colour tune track

310° 360° | CRI ≥90 | 220-240 V | DALI 3 ADDR. | X-PERT | X-PERT

MEDIUM 24°, CRI ≥ 90, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
18.8 W	3500 K	1090 lm	58 lm/W	1 8 0 - 5 6 ♁ 0 G 3 ◪ M

FLOOD 38°, CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
18.8 W	3500 K	1000 lm	53 lm/W	1 8 0 - 5 6 ♁ 0 G 3 ◪ F

Planning Information

Fresh colour for historical works of art

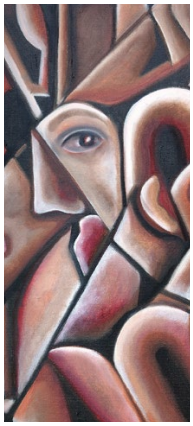



PABLO colour tune was developed to revitalise historical art, which is particularly worthy of protection, true to the original. An increased, individually adjustable red-blue saturation compensates for time-related colour damage – purely through the lighting. This reawakens the original colours of a work of art. The correct setting of PABLO colour tune can be easily controlled and adjusted via DALI-2.

Mounting accessories

RECESSED HOUSING / POINT OUTLET ceiling thickness, 1-30 mm

Ø·H (mm)	ORDER CODE
151·60	1 8 6 - 0 7 2 2 7 ◪

Order options

MOUNTING ♁		COLOUR ◪	
set screw (tool required)	1	traffic white RAL 9016	7
tool-free fixation	2	jet black RAL 9005	8

SURFACE HOUSING / POINT OUTLET

Ø·H (mm)	ORDER CODE
120·32	186-07228

Optical accessories

HONEYCOMB LOUVER for BO 70 | PABLO

COLOUR	Ø·H (mm)	ORDER CODE
jet black	61·3	080-59000018

SNOOT

COLOUR	Ø·H (mm)	ORDER CODE
jet black	62·33	080-59000008

Order options

COLOUR	
traffic white RAL 9016	7
jet black RAL 9005	8