


Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
jusqu'à 73 lm/W
L85 / 50000 h
DIM POTI
IP20

Types



Colours

Répartition de la lumière

PABLO multilens

EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; exchangeable additional lenses; precise radiation characteristics with different beam angles; installed and exchanged without tools; optical attachments as accessories; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, as an accessory

FR Spot sur rail en fonte d'aluminium injectée ; surface thermolaquée ; rotatif à 360° et orientable à 310° ; convertisseur installé dans boîtier de spot en aluminium ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; lentilles add. Interchangeables ; précision de caractéristique de rayonnement avec divers angles de diffusion ; Installation resp. remplacement sans outil ; eléments optiques comme accessoires ; adaptateur pour installation ou déplacement sans outil dans différents rails triphasés ; fixation de l'adaptateur au choix sans outils par vis moletée ou vis de serrage (tournevis nécessaire) ; point de sortie, au choix dans un un boîtier en saillie ou comme variante pour encastrement, comme accessoire



compatible with MOVE IT PRO 45



DiiA® standards 251, 252, 253



interchangeable diffusion sheets



360° rotatable, 310° tiltable




DIM POTI / rotation lock



PABLO multilens track

310° 360° | CRI ≥ 90 | 2 SDCM | 220-240 V | X-PERT | X-PERT


WIDE FLOOD / FLOOD / MEDIUM / SPOT / SUPER SPOT / OVAL 10°-64°, CRI ≥ 90, DIM POTI



SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.7 W	3000 K	1010 lm	69 lm/W	180-57♁058
	4000 K	1090 lm	74 lm/W	180-57♁068

incl. 5 pcs. interchangeable diffusion sheets

Planning Information

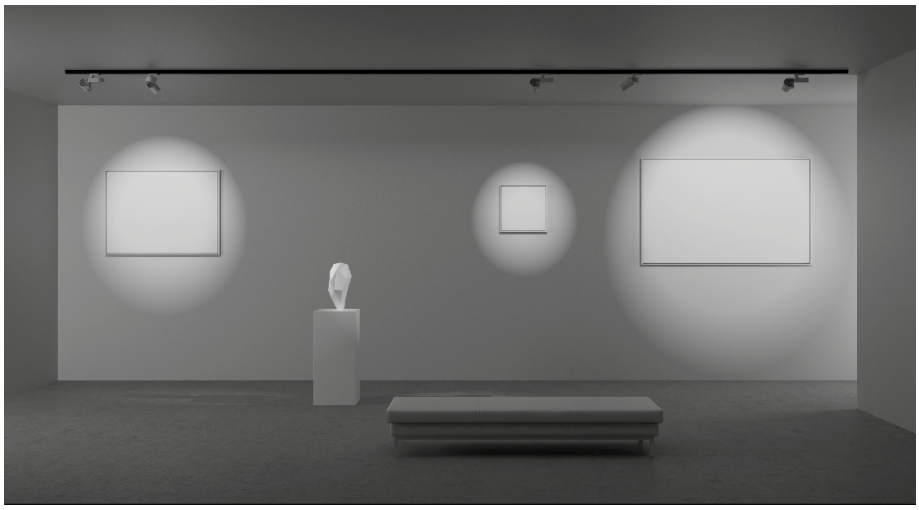

Mounting accessories

RECESSED HOUSING / POINT OUTLET ceiling thickness, 1-30 mm

Ø·H (mm)	ORDER CODE
151·60	186-07227

SURFACE HOUSING / POINT OUTLET

Ø·H (mm)	ORDER CODE
120·32	186-07228

Optical accessories

ø 48 | i

DIFFUSION SHEET FOR SUPERSPOT

TYPE	ORDER CODE
for a better homogeneous illumination	080-59000030

Order options

MOUNTING ♁		COLOUR	
set screw (tool required)	1	traffic white RAL 9016	7
tool-free fixation	2	jet black RAL 9005	8



OVAL FILTER

TYPE	ORDER CODE
60 x 15°	0 8 0 - 5 9 0 0 0 2 0