



PABLO multilens


EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spot-light housing; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; exchangeable additional lenses; precise radiation characteristics with different beam angles; installed and exchanged without tools; optical attachments as accessories; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, as an accessory

FR Spot sur rail en fonte d'aluminium injectée ; surface thermolaquée ; rotatif à 360° et orientable à 310° ; convertisseur installé dans boîtier de spot en aluminium ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; lentilles add. Interchangeables ; précision de caractéristique de rayonnement avec divers angles de diffusion ; Installation resp. remplacement sans outil ; éléments optiques comme accessoires ; adaptateur pour installation ou déplacement sans outil dans différents rails triphasés ; fixation de l'adaptateur au choix sans outils par vis moletée ou vis de serrage (tournevis nécessaire) ; point de sortie, au choix dans un boîtier en saillie ou comme variante pour encastrément, comme accessoire

Quickinfo

3000 K, 4000 K
 CRI ≥ 90 / 2 SDCM (initial MacAdam)
 jusqu'à 73 lm/W
 L85 / 50000 h
 DIM POTI
 IP20

Types



Couleur



Répartition de la lumière



compatible with
 MOVE IT PRO
 45



DiiA® standards
 251, 252, 253



interchangeable
 diffusion sheets



360° rotatable,
 310° tiltable



DIM POTI /
 rotation lock




PABLO multilens track




WIDE FLOOD / FLOOD / MEDIUM / SPOT / SUPER SPOT / OVAL 10°-64°, CRI ≥ 90, DIM POTI

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.7 W	3000 K	1010 lm	69 lm/W	1 8 0 - 5 7 <input checked="" type="checkbox"/> 0 5 8 <input checked="" type="checkbox"/>
	4000 K	1090 lm	74 lm/W	1 8 0 - 5 7 <input checked="" type="checkbox"/> 0 6 8 <input checked="" type="checkbox"/>

incl. 5 pcs. interchangeable diffusion sheets



Planning Information

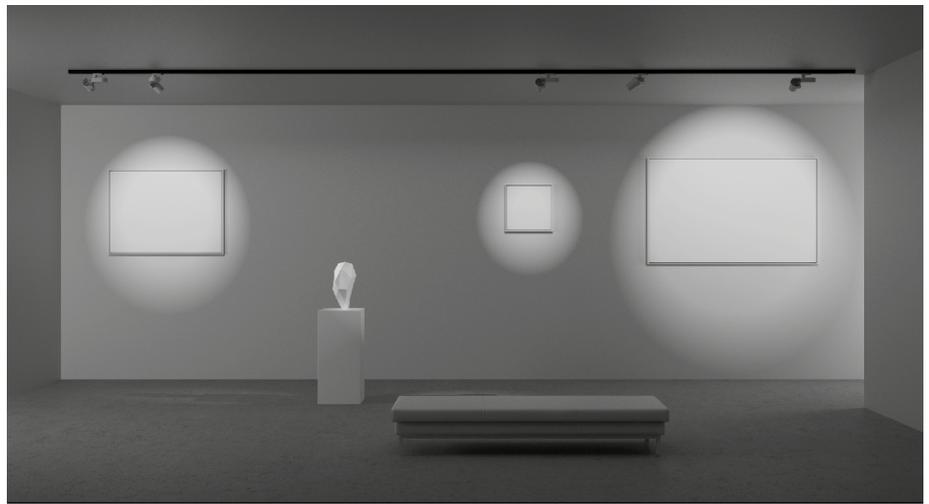

Mounting accessories (optional)

RECESSED HOUSING / POINT OUTLET ceiling thickness, 1-30 mm

Ø-H (mm)	ORDER CODE
151-60	1 8 6 - 0 7 2 2 7 <input checked="" type="checkbox"/>

SURFACE HOUSING / POINT OUTLET

Ø-H (mm)	ORDER CODE
120-32	1 8 6 - 0 7 2 2 8 <input checked="" type="checkbox"/>

Optical accessories (optional)

DIFFUSION SHEET FOR SUPERSPOT

TYPE	ORDER CODE
for a better homogeneous illumination	0 8 0 - 5 9 0 0 0 3 0



Order options

MOUNTING	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
set screw (tool required)	1	traffic white RAL 9016	7
tool-free fixation	2	jet black RAL 9005	8



OVAL FILTER 60 x 15°

ORDER CODE

080 - 5900020

Order options

MOUNTING		COLOUR	
set screw (tool required)	1	traffic white RAL 9016	7
tool-free fixation	2	jet black RAL 9005	8