



TULA suspended


EN Decorative suspended luminaire in aluminium; surface polished chrome or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy, either recessed or surface mounted version; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessories

FR Luminaire décoratif à suspension en aluminium ; surface chrome poli ou surface thermo-laquée ; suspension par câble, câble d'alimentation inclus (noir ou blanche) ; recou-pable à volonté ; bon anti-éblouissement grâce aux points lumineux en retrait ; incl. optique len-tille de grande qualité ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; convertisseur inclus dans le cache-piton, au choix en variante en-castrée ou en saillie ; anneaux de montage au plafond pour un positionnement multiple des lu-minaires dans la pièce disponibles comme ac-cessoires

Quickinfo

2700 K, 3000 K
 CRI \geq 90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
 jusqu'à 95 lm/W
 L90 / 50000 h
 Casambi, DALI-2, non DIM
 IP20

Types




Couleur




cache-piton




Répartition de la lumière



free positioning
by ring and
hook



track version
available




TULA nano suspended



MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 18 Vf, 500 mA	2700 K	790 lm	89 lm/W	0 4 9 - 5 H 1 0 4 1 <input checked="" type="checkbox"/> M
	3000 K	816 lm	92 lm/W	0 4 9 - 5 H 1 0 5 1 <input checked="" type="checkbox"/> M



FLOOD 30°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 18 Vf, 500 mA	2700 K	762 lm	86 lm/W	0 4 9 - 5 H 1 0 4 1 <input checked="" type="checkbox"/> F
	3000 K	787 lm	89 lm/W	0 4 9 - 5 H 1 0 5 1 <input checked="" type="checkbox"/> F




TULA micro suspended



MEDIUM 25°, CRI ≥ 90


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W, 18 Vf, 500 mA	2700 K	648 lm	77 lm/W	0 4 9 - 5 H 1 5 4 1 <input checked="" type="checkbox"/> M
	3000 K	746 lm	88 lm/W	0 4 9 - 5 H 1 5 5 1 <input checked="" type="checkbox"/> M



FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W, 18 Vf, 500 mA	2700 K	694 lm	82 lm/W	0 4 9 - 5 H 1 5 4 1 <input checked="" type="checkbox"/> F
	3000 K	798 lm	95 lm/W	0 4 9 - 5 H 1 5 5 1 <input checked="" type="checkbox"/> F


Mounting accessories (required)



MOUNTING SET trimless for cable suspension for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	75-48	0 0 5 - 3 5 1 1 0 1 7

excl. power supply



MOUNTING SET with trim for cable suspension for ceilings, 2-25 mm

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 1 0 1 7
jet black	77-49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply

Order options

HEIGHT	H	COLOUR	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
300 mm	5	special colours	X	traffic white RAL 9016	7
500 mm	7	chrome	4	jet black RAL 9005	8
		traffic white RAL 9016	7		
		jet black RAL 9005	8		

Mounting accessories (optional)



RING ceiling mounted


COLOUR	Ø-H (mm)	ORDER CODE
traffic white	50-88	0 5 0 - 0 5 1 0 2 1 7
jet black	50-88	0 5 0 - 0 5 1 0 2 1 8



HOOK ceiling mounted

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	18-58	0 5 0 - 0 5 1 0 3 1 7
jet black	18-58	0 5 0 - 0 5 1 0 3 1 8

Mounting tools accessories (optional)




SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA

Ø-H (mm)	ORDER CODE
100-107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless

Electrical accessories (required)



CANOPY for cable suspension 500 mA, 198-264 V AC, PC2


TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W non DIM	η 84 %	115-29	0 0 5 - 2 6 0 2 1 1 ▶
10 W DALI-2	η 85 %	115-29	0 0 5 - 2 6 0 2 1 3 ▶
10 W Casambi	η 83 %	115-29	0 0 5 - 2 6 0 2 1 9 ▶

incl. power supply

POWER SUPPLY 500 mA, 10 W, 198-264 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
non DIM	η 80 %	65-39-20	0 0 2 - 9 0 7 3 2
DALI-2	η 82 %	147-33-23	0 0 2 - 9 0 7 3 3

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
160 W PC2	220-240 V AC	η 94 %	72-90-63	0 0 5 - 6 5 2 0 2 1 0

Lifetime >100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 -1050 mA settable const. current | 2×42W | 48V DC | U OUT 10-40V SELV

Order options

HEIGHT	H	COLOUR	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
300 mm	5	special colours	X	traffic white RAL 9016	7
500 mm	7	chrome	4	jet black RAL 9005	8
		traffic white RAL 9016	7		
		jet black RAL 9005	8		

Optical accessories (optional)



HONEYCOMB LOUVER for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø-H (mm)	ORDER CODE
jet black	42.3	0 0 7 - 1 9 6 5 1 8 8



OVAL LENS for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42.3	0 0 7 - 1 9 6 5 8 8 0



SOFT LENS for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42.3	0 0 7 - 1 9 6 5 9 8 0



WALLWASHER LENS for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42.3	0 0 7 - 1 9 6 5 7 8 0

Order options

HEIGHT	H	COLOUR	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
300 mm	5	special colours	X	traffic white RAL 9016	7
500 mm	7	chrome	4	jet black RAL 9005	8
		traffic white RAL 9016	7		
		jet black RAL 9005	8		

Private Residence, Denmark

Danemark

Architecte
LINK Architecture

Lighting Design
anker & co

Photographe
Kris Dekeijser




Produits utilisés




TULA suspended



**SPOTLINE MOVE IT
25**



**MOVE IT 25 trimless
system**

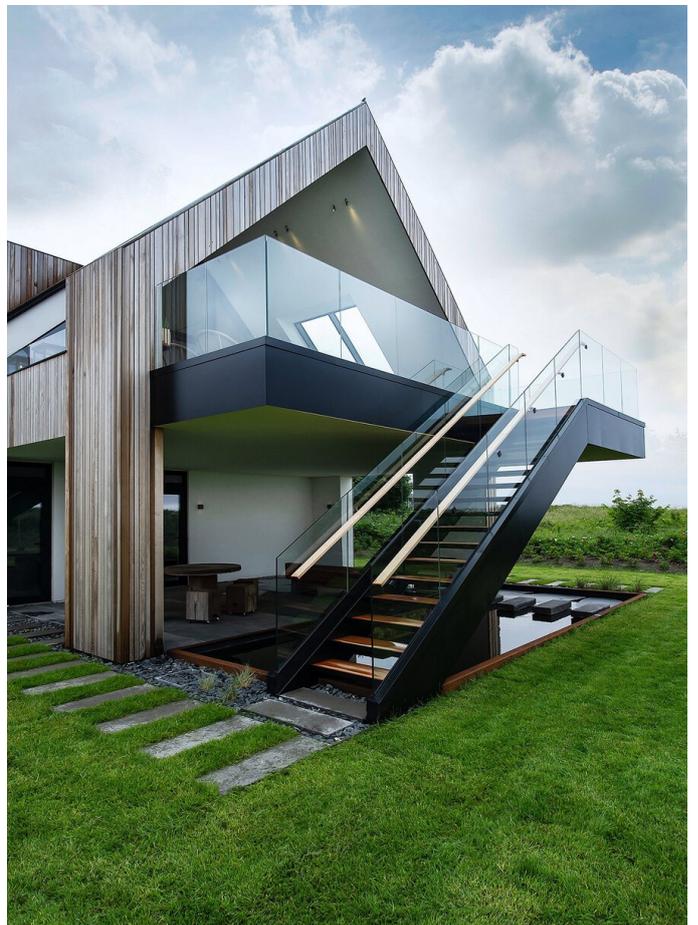



Trippenhuis

Pays-Bas

Architecte
Arpalight

Photographe
Rene de Wit Max Hart
Nibbrig




Produits utilisés



TULA suspended



**SASSO 60 round
semi-recessed**



**MOVE IT 25 trimless
system**



**SASSO 60 round
ceiling**



**BO 32 / 45 / 55 / 70
intrack 1 | 2 | 3 lamps**



