



ARY suspended


EN Decorative suspended luminaire in aluminium; surface powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; or height adjustable U-profile pendant rod suspension (black or white), feed in U-profile; spotlight head either fixed or 265° rotatable and 90° tiltable; good glare reduction due to recessed light point plane; incl. high quality lens system; precise radiation characteristics with different beam angles; shades available as accessory for variant with cable suspension in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

FR Luminaire décoratif à suspension en aluminium ; surface thermolaquée ; suspension par câble, câble d'alimentation inclus (noir ou blanche) ; recoupable à volonté ; ou suspension par barres de suspension profilées en U pouvant être raccourcies (noir ou blanche), conduit d'alimentation dans le profil en U ; tête du projecteur au choix rigide ou pivotante à 265° et orientable à 90° ; bon anti-éblouissement grâce aux points lumineux en retrait ; incl. optique lentille de grande qualité ; précision de caractéristique de rayonnement avec divers angles de diffusion ; abat-jours dans les couleurs RAL velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white ou signal black pour la variante avec suspension par câble disponibles comme accessoires ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; convertisseur inclus dans le cache-piton ; anneaux de montage au plafond pour un positionnement multiple des luminaires dans la pièce disponibles comme accessoires

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
jusqu'à 94 lm/W
L90 / 50000 h
Casambi, DALI-2, non DIM
IP20

Types

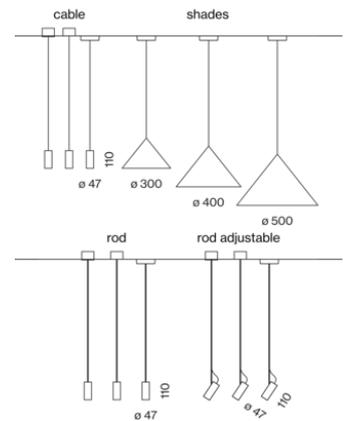

Couleur




cache-piton




Répartition de la lumière



265° rotatable,
90° tiltable




free positioning
by ring and
hook



track version
available




ARY cable suspended



MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 4 1 \bar{M}
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 5 1 \bar{M}
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 6 1 \bar{M}

special colours: cable always in white




FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 4 1 \bar{F}
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 5 1 \bar{F}
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 6 1 \bar{F}

special colours: cable always in white




ARY rod suspended



MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 $\bar{0}$,2 1 4 1 \bar{M}
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$,2 1 5 1 \bar{M}
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$,2 1 6 1 \bar{M}

special colours: rod always in white



FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 $\bar{0}$,2 1 4 1 \bar{F}
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$,2 1 5 1 \bar{F}
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$,2 1 6 1 \bar{F}

special colours: rod always in white




ARY adjustable rod suspended



MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 $\bar{0}$,3 1 4 1 \bar{M}
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$,3 1 5 1 \bar{M}
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$,3 1 6 1 \bar{M}

special colours: rod always in white



Order options

MOUNTING	$\bar{0}$	MOUNTING	$\bar{0}$,1	COLOUR	$\bar{0}$	COLOUR	$\bar{0}$
cable 1500 mm	1	rod 1500 mm	1	special colours	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		


COLOUR

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

FLOOD 44°, CRI ≥ 90


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 8,3 1 4 1 <input checked="" type="checkbox"/> F
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 8,3 1 5 1 <input checked="" type="checkbox"/> F
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 8,3 1 6 1 <input checked="" type="checkbox"/> F

special colours: rod always in white

Mounting accessories (required)**MOUNTING SET trimless for cable suspension for plasterboard ceilings**


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	75-48	0 0 5 - 3 5 1 1 0 1 7

excl. power supply

**MOUNTING SET trimless for rod suspension for plasterboard ceilings**


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	75-48	0 0 5 - 3 5 1 2 0 1 7

excl. power supply

**MOUNTING SET with trim for cable suspension for ceilings, 2-25 mm**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 1 0 1 7
jet black	77-49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply


**MOUNTING SET with trim for rod suspension for ceilings, 2-25 mm**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 2 0 1 7
jet black	77-49	0 0 5 - 3 5 2 2 0 1 8

excl. power supply

Mounting accessories (optional)**RING ceiling mounted**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	50-88	0 5 0 - 0 5 1 0 2 1 7
jet black	50-88	0 5 0 - 0 5 1 0 2 1 8

Mounting tools accessories (optional)**SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA**

Ø-H (mm)	ORDER CODE
100-107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless

Order options

MOUNTING	1	MOUNTING	1	COLOUR	7	COLOUR	7
cable 1500 mm	1	rod 1500 mm	1	special colours	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		

COLOUR

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

Electrical accessories (required)



CANOPY for cable suspension 500 mA, 198-264 V AC, PC2

TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W non DIM	η 84 %	115-29	0 0 5 - 2 6 0 2 1 1 ☑
10 W DALI-2	η 85 %	115-29	0 0 5 - 2 6 0 2 1 3 ☑
10 W Casambi	η 83 %	115-29	0 0 5 - 2 6 0 2 1 9 ☑

incl. power supply



CANOPY for rod suspension 500 mA, 198-264 V AC, PC2


TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W non DIM	η 84 %	115-29	0 0 5 - 2 6 0 1 1 1 ☑
10 W DALI-2	η 85 %	115-29	0 0 5 - 2 6 0 1 1 3 ☑
10 W Casambi	η 83 %	115-29	0 0 5 - 2 6 0 1 1 9 ☑

incl. power supply

POWER SUPPLY 500 mA, 10 W, 198-264 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
non DIM	η 80 %	65-39-20	0 0 2 - 9 0 7 3 2
DALI-2	η 82 %	147-33-23	0 0 2 - 9 0 7 3 3

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
160 W PC2	220-240 V AC	η 94 %	72-90-63	0 0 5 - 6 5 2 0 2 1 0


Lifetime >100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 - 1050 mA settable const. current | 2×42W | 48V DC | U OUT 10-40V SELV

Optical accessories (optional)



SHADE 300

COLOUR	Ø-H (mm)	ORDER CODE
signal black	300-188	0 4 9 - 5 9 3 3 1 1 B
velvet beige	300-188	0 4 9 - 5 9 3 3 1 1 C
woodpecker olive	300-188	0 4 9 - 5 9 3 3 1 1 G
kingfisher grey	300-188	0 4 9 - 5 9 3 3 1 1 L
madeira brown	300-188	0 4 9 - 5 9 3 3 1 1 T
signal white	300-188	0 4 9 - 5 9 3 3 1 1 W


only available for ARY cable suspended

Order options

MOUNTING	☒	MOUNTING	☒ ₁	COLOUR	☑	COLOUR	☑
cable 1500 mm	1	rod 1500 mm	1	special colours	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		


COLOUR

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

**SHADE 400**

COLOUR	Ø-H (mm)	ORDER CODE
signal black	400-253	0 4 9 - 5 9 3 4 1 1 B
velvet beige	400-253	0 4 9 - 5 9 3 4 1 1 C
woodpecker olive	400-253	0 4 9 - 5 9 3 4 1 1 G
kingfisher grey	400-253	0 4 9 - 5 9 3 4 1 1 L
madeira brown	400-253	0 4 9 - 5 9 3 4 1 1 T
signal white	400-253	0 4 9 - 5 9 3 4 1 1 W

only available for ARY cable suspended

**SHADE 500**

COLOUR	Ø-H (mm)	ORDER CODE
signal black	500-318	0 4 9 - 5 9 3 5 1 1 B
velvet beige	500-318	0 4 9 - 5 9 3 5 1 1 C
woodpecker olive	500-318	0 4 9 - 5 9 3 5 1 1 G
kingfisher grey	500-318	0 4 9 - 5 9 3 5 1 1 L
madeira brown	500-318	0 4 9 - 5 9 3 5 1 1 T
signal white	500-318	0 4 9 - 5 9 3 5 1 1 W

only available for ARY cable suspended

**HONEYCOMB LOUVER** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø-H (mm)	ORDER CODE
jet black	42-3	0 0 7 - 1 9 6 5 1 8 8

**OVAL LENS** for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42-3	0 0 7 - 1 9 6 5 8 8 0

**SOFT LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42-3	0 0 7 - 1 9 6 5 9 8 0

**WALLWASHER LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42-3	0 0 7 - 1 9 6 5 7 8 0

Order options

MOUNTING	1	MOUNTING	1	COLOUR	X	COLOUR	7
cable 1500 mm	1	rod 1500 mm	1	special colours	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		

COLOUR

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

Young Family Apartment, Ukraine

Ukraine

Architecte
YODEZEEN Architects

Lighting Design
Svetlana Osadcha

Photographe
Andrii Shurpenkov



Produits utilisés



**OPAL HIGH
PERFORMANCE
MOVE IT 25**



**MOVE IT 25 surface /
suspended system**



ARY suspended



