



ARY suspended


EN Decorative suspended luminaire in aluminium; surface powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; or height adjustable U-profile pendant rod suspension (black or white), feed in U-profile; spotlight head either fixed or 265° rotatable and 90° tiltable; good glare reduction due to recessed light point plane; incl. high quality lens system; precise radiation characteristics with different beam angles; shades available as accessory for variant with cable suspension in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

FR Luminaire décoratif à suspension en aluminium ; surface thermolaquée ; suspension par câble, câble d'alimentation inclus (noir ou blanche) ; recoupable à volonté ; ou suspension par barres de suspension profilées en U pouvant être raccourcies (noir ou blanche), conduit d'alimentation dans le profil en U ; tête du projecteur au choix rigide ou pivotante à 265° et orientable à 90° ; bon anti-éblouissement grâce aux points lumineux en retrait ; incl. optique lentille de grande qualité ; précision de caractéristique de rayonnement avec divers angles de diffusion ; abat-jours dans les couleurs RAL velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white ou signal black pour la variante avec suspension par câble disponibles comme accessoires ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; convertisseur inclus dans le cache-piton ; anneaux de montage au plafond pour un positionnement multiple des luminaires dans la pièce disponibles comme accessoires

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
jusqu'à 94 lm/W
L90 / 50000 h
Casambi, DALI-2, non DIM
IP20

Types

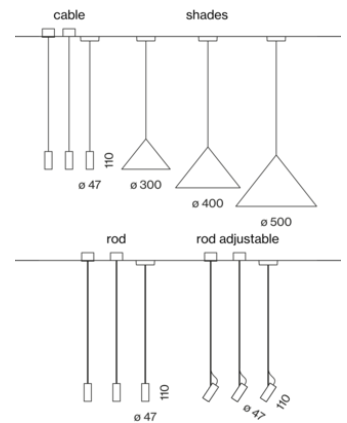

Couleur




cache-piton




Répartition de la lumière



265° rotatable,
90° tiltable




free positioning
by ring and
hook



track version
available




ARY cable suspended



MEDIUM 25°, CRI ≥ 90

| FIXTURE | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------|----------|---------------------------------------|
| 8.4 W, | 2700 K | 642 lm | 76 lm/W | 0 4 9 - 5 $\bar{0}$ 1 1 4 1 \bar{M} |
| 18 Vf, | 3000 K | 739 lm | 88 lm/W | 0 4 9 - 5 $\bar{0}$ 1 1 5 1 \bar{M} |
| 500 mA | 4000 K | 739 lm | 88 lm/W | 0 4 9 - 5 $\bar{0}$ 1 1 6 1 \bar{M} |

special colours: cable always in white




FLOOD 44°, CRI ≥ 90

| FIXTURE | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------|----------|---------------------------------------|
| 8.4 W, | 2700 K | 688 lm | 82 lm/W | 0 4 9 - 5 $\bar{0}$ 1 1 4 1 \bar{F} |
| 18 Vf, | 3000 K | 791 lm | 94 lm/W | 0 4 9 - 5 $\bar{0}$ 1 1 5 1 \bar{F} |
| 500 mA | 4000 K | 791 lm | 94 lm/W | 0 4 9 - 5 $\bar{0}$ 1 1 6 1 \bar{F} |

special colours: cable always in white




ARY rod suspended



MEDIUM 25°, CRI ≥ 90

| FIXTURE | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------|----------|--|
| 8.4 W, | 2700 K | 642 lm | 76 lm/W | 0 4 9 - 5 $\bar{0}$,2 1 4 1 \bar{M} |
| 18 Vf, | 3000 K | 739 lm | 88 lm/W | 0 4 9 - 5 $\bar{0}$,2 1 5 1 \bar{M} |
| 500 mA | 4000 K | 739 lm | 88 lm/W | 0 4 9 - 5 $\bar{0}$,2 1 6 1 \bar{M} |

special colours: rod always in white



FLOOD 44°, CRI ≥ 90

| FIXTURE | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------|----------|--|
| 8.4 W, | 2700 K | 688 lm | 82 lm/W | 0 4 9 - 5 $\bar{0}$,2 1 4 1 \bar{F} |
| 18 Vf, | 3000 K | 791 lm | 94 lm/W | 0 4 9 - 5 $\bar{0}$,2 1 5 1 \bar{F} |
| 500 mA | 4000 K | 791 lm | 94 lm/W | 0 4 9 - 5 $\bar{0}$,2 1 6 1 \bar{F} |

special colours: rod always in white




ARY adjustable rod suspended



MEDIUM 25°, CRI ≥ 90

| FIXTURE | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------|----------|--|
| 8.4 W, | 2700 K | 642 lm | 76 lm/W | 0 4 9 - 5 $\bar{0}$,3 1 4 1 \bar{M} |
| 18 Vf, | 3000 K | 739 lm | 88 lm/W | 0 4 9 - 5 $\bar{0}$,3 1 5 1 \bar{M} |
| 500 mA | 4000 K | 739 lm | 88 lm/W | 0 4 9 - 5 $\bar{0}$,3 1 6 1 \bar{M} |

special colours: rod always in white



Order options

| MOUNTING | $\bar{0}$ | MOUNTING | $\bar{0}$,1 | COLOUR | $\bar{0}$ | COLOUR | $\bar{0}$ |
|---|-----------|---|--------------|------------------------|-----------|------------------------|-----------|
| cable 1500 mm | 1 | rod 1500 mm | 1 | special colours | X | traffic white RAL 9016 | 7 |
| cable 2000 mm with hook (one ring included) | 2 | rod 1500 mm with hook (one ring included) | 2 | traffic white RAL 9016 | 7 | jet black RAL 9005 | 8 |
| | | | | jet black RAL 9005 | 8 | | |


COLOUR

| | |
|------------------|---------------|
| signal black | RAL 9004 |
| velvet beige | RAL 085 80 10 |
| woodpecker olive | RAL 100 50 20 |

FLOOD 44°, CRI ≥ 90


| FIXTURE | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------|----------|--|
| 8.4 W, | 2700 K | 688 lm | 82 lm/W | 0 4 9 - 5 3 , 3 1 4 1 <input checked="" type="checkbox"/> F |
| 18 Vf, | 3000 K | 791 lm | 94 lm/W | 0 4 9 - 5 3 , 3 1 5 1 <input checked="" type="checkbox"/> F |
| 500 mA | 4000 K | 791 lm | 94 lm/W | 0 4 9 - 5 3 , 3 1 6 1 <input checked="" type="checkbox"/> F |

special colours: rod always in white

Mounting accessories (required)**MOUNTING SET trimless for cable suspension for plasterboard ceilings**


| COLOUR | CEILING THICKNESS | Ø-H (mm) | ORDER CODE |
|---------------|-------------------|----------|-----------------------|
| traffic white | 9-25 mm | 75-48 | 0 0 5 - 3 5 1 1 0 1 7 |

excl. power supply

**MOUNTING SET trimless for rod suspension for plasterboard ceilings**


| COLOUR | CEILING THICKNESS | Ø-H (mm) | ORDER CODE |
|---------------|-------------------|----------|-----------------------|
| traffic white | 9-25 mm | 75-48 | 0 0 5 - 3 5 1 2 0 1 7 |

excl. power supply

**MOUNTING SET with trim for cable suspension for ceilings, 2-25 mm**

| COLOUR | Ø-H (mm) | ORDER CODE |
|---------------|----------|-----------------------|
| traffic white | 77-49 | 0 0 5 - 3 5 2 1 0 1 7 |
| jet black | 77-49 | 0 0 5 - 3 5 2 1 0 1 8 |

excl. power supply


**MOUNTING SET with trim for rod suspension for ceilings, 2-25 mm**

| COLOUR | Ø-H (mm) | ORDER CODE |
|---------------|----------|-----------------------|
| traffic white | 77-49 | 0 0 5 - 3 5 2 2 0 1 7 |
| jet black | 77-49 | 0 0 5 - 3 5 2 2 0 1 8 |

excl. power supply

Mounting accessories (optional)**RING ceiling mounted**

| COLOUR | Ø-H (mm) | ORDER CODE |
|---------------|----------|-----------------------|
| traffic white | 50-88 | 0 5 0 - 0 5 1 0 2 1 7 |
| jet black | 50-88 | 0 5 0 - 0 5 1 0 2 1 8 |

Mounting tools accessories (optional)**SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA**

| Ø-H (mm) | ORDER CODE |
|----------|-----------------------|
| 100-107 | 0 6 3 - 8 9 1 2 1 1 0 |

necessary to install mounting housing trimless

Order options

| MOUNTING | 1 | MOUNTING | 1 | COLOUR | 7 | COLOUR | 7 |
|---|---|---|---|------------------------|---|------------------------|---|
| cable 1500 mm | 1 | rod 1500 mm | 1 | special colours | X | traffic white RAL 9016 | 7 |
| cable 2000 mm with hook (one ring included) | 2 | rod 1500 mm with hook (one ring included) | 2 | traffic white RAL 9016 | 7 | jet black RAL 9005 | 8 |
| | | | | jet black RAL 9005 | 8 | | |

COLOUR

| | |
|------------------|---------------|
| signal black | RAL 9004 |
| velvet beige | RAL 085 80 10 |
| woodpecker olive | RAL 100 50 20 |

Electrical accessories (required)



CANOPY for cable suspension 500 mA, 198-264 V AC, PC2

| TYPE | EFFICIENCY | Ø-H (mm) | ORDER CODE |
|----------------|------------|----------|---------------------------------------|
| 13 W non DIM | η 84 % | 115-29 | 0 0 5 - 2 6 0 2 1 1 ☑ |
| 10 W DALI-2 | η 85 % | 115-29 | 0 0 5 - 2 6 0 2 1 3 ☑ |
| 10 W Casambi | η 83 % | 115-29 | 0 0 5 - 2 6 0 2 1 9 ☑ |

incl. power supply



CANOPY for rod suspension 500 mA, 198-264 V AC, PC2


| TYPE | EFFICIENCY | Ø-H (mm) | ORDER CODE |
|----------------|------------|----------|---------------------------------------|
| 13 W non DIM | η 84 % | 115-29 | 0 0 5 - 2 6 0 1 1 1 ☑ |
| 10 W DALI-2 | η 85 % | 115-29 | 0 0 5 - 2 6 0 1 1 3 ☑ |
| 10 W Casambi | η 83 % | 115-29 | 0 0 5 - 2 6 0 1 1 9 ☑ |

incl. power supply

POWER SUPPLY 500 mA, 10 W, 198-264 V AC, PC2

| TYPE | EFFICIENCY | L-W-H (mm) | ORDER CODE |
|---------|------------|------------|-------------------|
| non DIM | η 80 % | 65-39-20 | 0 0 2 - 9 0 7 3 2 |
| DALI-2 | η 82 % | 147-33-23 | 0 0 2 - 9 0 7 3 3 |

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

| TYPE | INPUT VOLTAGE | EFFICIENCY | L-W-H (mm) | ORDER CODE |
|-------------|---------------|------------|------------|-----------------------|
| 160 W PC2 | 220-240 V AC | η 94 % | 72-90-63 | 0 0 5 - 6 5 2 0 2 1 0 |


Lifetime >100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

DIN RAIL LED DRIVER

| TYPE | L-W-H (mm) | ORDER CODE |
|--------------------------|------------|-----------------------|
| DALI-2 DT6 1-2 addresses | 36-88-59 | 0 0 5 - 6 1 2 1 0 3 0 |

200 - 1050 mA settable const. current | 2×42W | 48V DC | U OUT 10-40V

Optical accessories (optional)



SHADE 300

| COLOUR | Ø-H (mm) | ORDER CODE |
|------------------|----------|-----------------------|
| signal black | 300-188 | 0 4 9 - 5 9 3 3 1 1 B |
| velvet beige | 300-188 | 0 4 9 - 5 9 3 3 1 1 C |
| woodpecker olive | 300-188 | 0 4 9 - 5 9 3 3 1 1 G |
| kingfisher grey | 300-188 | 0 4 9 - 5 9 3 3 1 1 L |
| madeira brown | 300-188 | 0 4 9 - 5 9 3 3 1 1 T |
| signal white | 300-188 | 0 4 9 - 5 9 3 3 1 1 W |


only available for ARY cable suspended

Order options

| MOUNTING | ☒ | MOUNTING | ☒ ₁ | COLOUR | ☑ | COLOUR | ☑ |
|---|---|---|----------------|---------------------------------|---|------------------------|---|
| cable 1500 mm | 1 | rod 1500 mm | 1 | special colours | X | traffic white RAL 9016 | 7 |
| cable 2000 mm with hook (one ring included) | 2 | rod 1500 mm with hook (one ring included) | 2 | traffic white RAL 9016 | 7 | jet black RAL 9005 | 8 |
| | | | | jet black RAL 9005 | 8 | | |


COLOUR

| | |
|------------------|---------------|
| signal black | RAL 9004 |
| velvet beige | RAL 085 80 10 |
| woodpecker olive | RAL 100 50 20 |

**SHADE 400**

| COLOUR | Ø-H (mm) | ORDER CODE |
|------------------|----------|-----------------------|
| signal black | 400-253 | 0 4 9 - 5 9 3 4 1 1 B |
| velvet beige | 400-253 | 0 4 9 - 5 9 3 4 1 1 C |
| woodpecker olive | 400-253 | 0 4 9 - 5 9 3 4 1 1 G |
| kingfisher grey | 400-253 | 0 4 9 - 5 9 3 4 1 1 L |
| madeira brown | 400-253 | 0 4 9 - 5 9 3 4 1 1 T |
| signal white | 400-253 | 0 4 9 - 5 9 3 4 1 1 W |

only available for ARY cable suspended

**SHADE 500**

| COLOUR | Ø-H (mm) | ORDER CODE |
|------------------|----------|-----------------------|
| signal black | 500-318 | 0 4 9 - 5 9 3 5 1 1 B |
| velvet beige | 500-318 | 0 4 9 - 5 9 3 5 1 1 C |
| woodpecker olive | 500-318 | 0 4 9 - 5 9 3 5 1 1 G |
| kingfisher grey | 500-318 | 0 4 9 - 5 9 3 5 1 1 L |
| madeira brown | 500-318 | 0 4 9 - 5 9 3 5 1 1 T |
| signal white | 500-318 | 0 4 9 - 5 9 3 5 1 1 W |

only available for ARY cable suspended

**HONEYCOMB LOUVER** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

| COLOUR | Ø-H (mm) | ORDER CODE |
|-----------|----------|-----------------------|
| jet black | 42-3 | 0 0 7 - 1 9 6 5 1 8 8 |

**OVAL LENS** for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

| Ø-H (mm) | ORDER CODE |
|----------|-----------------------|
| 42-3 | 0 0 7 - 1 9 6 5 8 8 0 |

**SOFT LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

| Ø-H (mm) | ORDER CODE |
|----------|-----------------------|
| 42-3 | 0 0 7 - 1 9 6 5 9 8 0 |

**WALLWASHER LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

| Ø-H (mm) | ORDER CODE |
|----------|-----------------------|
| 42-3 | 0 0 7 - 1 9 6 5 7 8 0 |

Order options

| MOUNTING | 1 | MOUNTING | 1 | COLOUR | X | COLOUR | 7 |
|---|---|---|---|---------------------------------|---|------------------------|---|
| cable 1500 mm | 1 | rod 1500 mm | 1 | special colours | X | traffic white RAL 9016 | 7 |
| cable 2000 mm with hook (one ring included) | 2 | rod 1500 mm with hook (one ring included) | 2 | traffic white RAL 9016 | 7 | jet black RAL 9005 | 8 |
| | | | | jet black RAL 9005 | 8 | | |

COLOUR

| | |
|------------------|---------------|
| signal black | RAL 9004 |
| velvet beige | RAL 085 80 10 |
| woodpecker olive | RAL 100 50 20 |

Young Family Apartment, Ukraine

Ukraine

Architecte
YODEZEEN Architects

Lighting Design
Svetlana Osadcha

Photographe
Andrii Shurpenkov



Produits utilisés



ARY suspended



**OPAL HIGH
PERFORMANCE
MOVE IT 25**



**MOVE IT 25 surface /
suspended system**



