






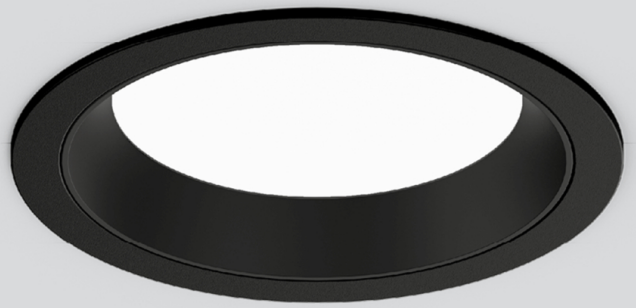

## Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
jusqu'à 128 lm/W
L80 / 50000 h, L85 / 50000 h
DALI-2, non DIM
Microprismatic, Opal
front IP20, IP54, back IP20

### Types

MIRA round




### Colours



### Répartition de la lumière




# MIRA 150

recessed

EN Round recessed spotlight in die-cast aluminium; with trim; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation without tools using snap spring closure; lighting level recessed; completely homogeneously illuminated, satinised or microprismatic PMMA cover; energy-efficient LEDs with very good colour rendering; external converter for ceiling insertion


FR Spot rond encastrable en fonte d'aluminium injectée ; avec bord continu ; convient aux épaisseurs de plafond de 2-25 mm ; surface thermolaquée ; montage sans outil avec fermeture par ressort à déclic ; niveau de luminaire en retrait ; cache PMMA, à éclairage parfaitement homogène, satiné ou microprismatique ; LED économes en énergie à restitution de couleur élevée ; convertisseur externe pour fente plafond



## **MIRA 150** round trim

CRI ≥ 90 · 220-240 V · DALI 1 ADDR. · IP20 / IP54 · X-PERT · X-PERT





### OPAL CRI ≥ 90

| SYSTEM | COLOUR TEMP. | COLOUR | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|---|
| 13.0 W | 3000 K | jet black | 1380 lm | 106 lm/W | ● 5 2 - 9 3 2 3 5 ◆ 8 O |
| | | pure white | 1500 lm | 115 lm/W | ● 5 2 - 9 3 2 3 5 ◆ 7 O |
| | 4000 K | jet black | 1520 lm | 117 lm/W | ● 5 2 - 9 3 2 3 6 ◆ 8 O |
| | | pure white | 1660 lm | 128 lm/W | ● 5 2 - 9 3 2 3 6 ◆ 7 O |
| 18.6 W | 3000 K | jet black | 1850 lm | 99 lm/W | ● 5 2 - 9 3 2 4 5 ◆ 8 O |
| | | pure white | 2020 lm | 109 lm/W | ● 5 2 - 9 3 2 4 5 ◆ 7 O |
| | 4000 K | jet black | 2040 lm | 110 lm/W | ● 5 2 - 9 3 2 4 6 ◆ 8 O |
| | | pure white | 2220 lm | 119 lm/W | ● 5 2 - 9 3 2 4 6 ◆ 7 O |

### MICROPRISMATIC CRI ≥ 90

| SYSTEM | COLOUR TEMP. | COLOUR | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|---|
| 13.0 W | 3000 K | jet black | 1340 lm | 103 lm/W | ● 5 2 - 9 3 2 3 5 ◆ 8 P |
| | | pure white | 1470 lm | 113 lm/W | ● 5 2 - 9 3 2 3 5 ◆ 7 P |
| | 4000 K | jet black | 1480 lm | 114 lm/W | ● 5 2 - 9 3 2 3 6 ◆ 8 P |
| | | pure white | 1620 lm | 125 lm/W | ● 5 2 - 9 3 2 3 6 ◆ 7 P |
| 18.6 W | 3000 K | jet black | 1800 lm | 97 lm/W | ● 5 2 - 9 3 2 4 5 ◆ 8 P |
| | | pure white | 1970 lm | 106 lm/W | ● 5 2 - 9 3 2 4 5 ◆ 7 P |
| | 4000 K | jet black | 1980 lm | 106 lm/W | ● 5 2 - 9 3 2 4 6 ◆ 8 P |
| | | pure white | 2170 lm | 117 lm/W | ● 5 2 - 9 3 2 4 6 ◆ 7 P |

## Electrical mounting accessories




### THROUGH WIRING CONNECTION BOX

| TYPE | L·W·H (mm) | ORDER CODE |
|---|---|---|
| non DIM cable ø 4 – 12 mm | 105·58·30 | 0 0 5 - 2 5 3 1 1 1 0 |
| DALI cable ø 4 – 12 mm | 105·58·30 | 0 0 5 - 2 5 5 1 1 1 0 |

Linect®-Ready

**Order options**

| IP RATING FRONT | ● | CONTROL | ◆ | COLOUR | |
|---|---|---|---|---|---|
| IP20 | 0 | non DIM | 1 | pure white | RAL 9010 |
| IP54 | 8 | DALI-2 | 3 | jet black | RAL 9005 |