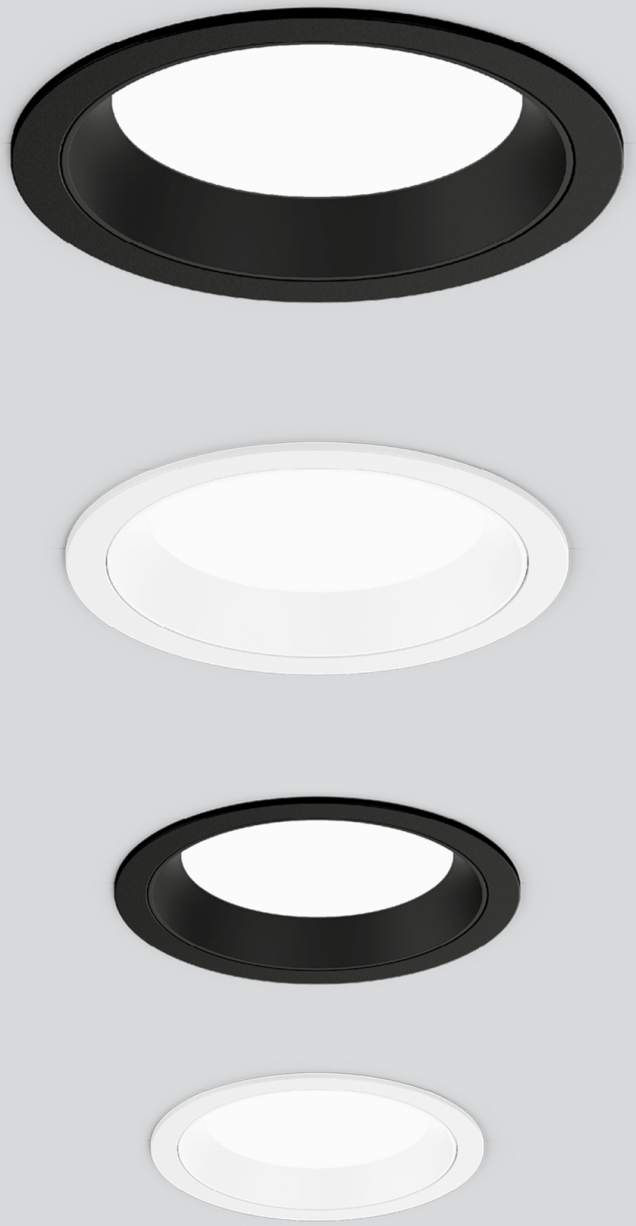

Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 25
jusqu'à 128 lm/W
L80 / 50000 h, L85 / 50000 h
DALI-2, non DIM
Microprismatic, Opal
front IP20, IP54, back IP20

Types

MIRA round



Colours

Répartition de la lumière

MIRA 150

recessed

EN Round recessed spotlight in die-cast aluminium; with trim; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation without tools using snap spring closure; lighting level recessed; completely homogeneously illuminated, satinised or microprismatic PMMA cover; energy-efficient LEDs with very good colour rendering; external converter for ceiling insertion

FR Spot rond encastrable en fonte d'aluminium injectée ; avec bord continu ; convient aux épaisseurs de plafond de 2-25 mm ; surface thermolaquée ; montage sans outil avec fermeture par ressort à déclic ; niveau de luminaire en retrait ; cache PMMA, à éclairage parfaitement homogène, satiné ou microprismatique ; LED économes en énergie à restitution de couleur élevée ; convertisseur externe pour fente plafond



MIRA 150 round trim





OPAL CRI ≥ 90

SYSTEM	COLOUR TEMP.	COLOUR	LUM. FLUX	EFFICACY	ORDER CODE
13.0 W	3000 K	jet black	1380 lm	106 lm/W	52-932358O
		pure white	1500 lm	115 lm/W	52-932357O
	4000 K	jet black	1520 lm	117 lm/W	52-932368O
		pure white	1660 lm	128 lm/W	52-932367O
18.6 W	3000 K	jet black	1850 lm	99 lm/W	52-932458O
		pure white	2020 lm	109 lm/W	52-932457O
	4000 K	jet black	2040 lm	110 lm/W	52-932468O
		pure white	2220 lm	119 lm/W	52-932467O

MICROPRISMATIC CRI ≥ 90

SYSTEM	COLOUR TEMP.	COLOUR	LUM. FLUX	EFFICACY	ORDER CODE
13.0 W	3000 K	jet black	1340 lm	103 lm/W	52-932358P
		pure white	1470 lm	113 lm/W	52-932357P
	4000 K	jet black	1480 lm	114 lm/W	52-932368P
		pure white	1620 lm	125 lm/W	52-932367P
18.6 W	3000 K	jet black	1800 lm	97 lm/W	52-932458P
		pure white	1970 lm	106 lm/W	52-932457P
	4000 K	jet black	1980 lm	106 lm/W	52-932468P
		pure white	2170 lm	117 lm/W	52-932467P

Electrical mounting accessories



THROUGH WIRING CONNECTION BOX

TYPE	L·W·H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105·58·30	005-253110
DALI cable ø 4 – 12 mm	105·58·30	005-255110

Linect®-Ready

Order options

IP RATING FRONT		CONTROL		COLOUR	
IP20	0	non DIM	1	pure white	RAL 9010
IP54	8	DALI-2	3	jet black	RAL 9005