



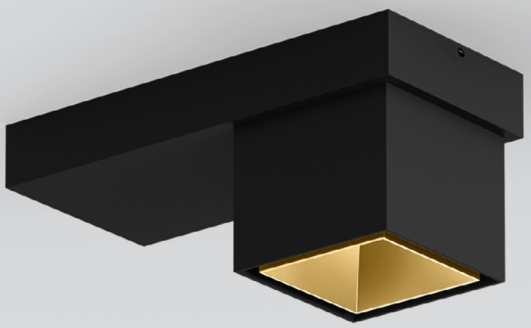

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
jusqu'à 95 lm/W
L90 / 100000 h
DALI-2, non DIM
IP20

Types



Colours



Couleur intérieure



Répartition de la lumière



SASSO 60 base 1 lamp

ceiling

EN Cylindrical or square spotlight made of aluminium; light inset lacquered; housing powder coated; light inset rotatable and tiltable (cylindrical versions); surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; luminaire for through wiring

FR Spot cylindrique ou carré en aluminium ; insert d'éclairage peint ; boîtier thermolaqué ; module d'éclairage rotatif et orientable (variantes cylindriques) ; boîtier de montage en aluminium, avec convertisseur ; plaque de montage avec unité de conversion prémontée, pouvant être montée à l'avance ; corps de luminaire pouvant être monté sans outils grâce à un système de verrouillage ; caractéristiques de rayonn. précises grâce à l'optique à lentille ; Technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; luminaire pour câblage continu



glare control
(UGR ≤ 16)




easy mounting
no visible
screws



CRI ≥ 95 2
SDCM
(optional)





SASSO 60 BASE ROUND ADJUSTABLE 1 LAMP CEILING

30° 360° | CRI ≥ 90 | 2 SDCM | UGR ≤ 10 | cd/m² ≤ 1500 | 220-240 V | 1 ADDR. | X-PERT | X-PERT

SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	735 lm	71 lm/W	048-313091 S
	3000 K	759 lm	73 lm/W	048-313001 S
	3500 K	775 lm	75 lm/W	048-313021 S
	4000 K	799 lm	77 lm/W	048-313011 S

The data values for the luminous flux of fraction may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.

MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	874 lm	86 lm/W	048-313091 M
	3000 K	907 lm	89 lm/W	048-313001 M
	3500 K	927 lm	91 lm/W	048-313021 M
	4000 K	946 lm	93 lm/W	048-313011 M

The data values for the luminous flux of fraction may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD 40°-41°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	831 lm	81 lm/W	048-313091 F
	3000 K	862 lm	85 lm/W	048-313001 F
	3500 K	880 lm	86 lm/W	048-313021 F
	4000 K	899 lm	88 lm/W	048-313011 F

The data values for the luminous flux of fraction may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	876 lm	86 lm/W	048-313091 W
	3000 K	909 lm	89 lm/W	048-313001 W
	3500 K	928 lm	91 lm/W	048-313021 W
	4000 K	948 lm	93 lm/W	048-313011 W

The data values for the luminous flux of fraction may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.


Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9



SASSO 60 BASE SQUARE DOWNLIGHT 1 LAMP CEILING

CRI ≥ 90 | 2 SDCM | UGR ≤ 13 | cd/m² ≤ 1500 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	751 lm	72 lm/W	048-303090 S
	3000 K	775 lm	75 lm/W	048-303000 S
	3500 K	792 lm	76 lm/W	048-303020 S
	4000 K	816 lm	78 lm/W	048-303010 S

The data values for the luminous flux of fraction may differ for specific order options by -7%. Luminous flux value refers to inner colour matt silver.

MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	894 lm	88 lm/W	048-303090 M
	3000 K	928 lm	91 lm/W	048-303000 M
	3500 K	948 lm	93 lm/W	048-303020 M
	4000 K	968 lm	95 lm/W	048-303010 M

The data values for the luminous flux of fraction may differ for specific order options by -9%. Luminous flux value refers to inner colour matt silver.

FLOOD 40°-42°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	856 lm	84 lm/W	048-303090 F
	3000 K	888 lm	87 lm/W	048-303000 F
	3500 K	907 lm	89 lm/W	048-303020 F
	4000 K	926 lm	91 lm/W	048-303010 F

The data values for the luminous flux of fraction may differ for specific order options by -13%. Luminous flux value refers to inner colour matt silver.

WIDE FLOOD 57°-58°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	895 lm	88 lm/W	048-303090 W
	3000 K	928 lm	91 lm/W	048-303000 W
	3500 K	949 lm	93 lm/W	048-303020 W
	4000 K	969 lm	95 lm/W	048-303010 W

The data values for the luminous flux of fraction may differ for specific order options by -10%. Luminous flux value refers to inner colour matt silver.

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9

Oppenländer Rechtsanwälte, Stuttgart

Allemagne

Architecte
Ippolito Fleitz Group GmbH

Photographe
Zooey Braun



Produits utilisés




SASSO 100 round ceiling




MINO 60 CIRCLE suspended



SASSO 60 base 1 lamp ceiling



SASSO PRO 80 adjustable flush round recessed



SASSO 60 round downlight recessed 1 lamp

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


OPPENLÄNDER
RECHTSANWÄLTE






OPPENL







