



## SASSO 60 base 2 lamps

ceiling


**EN** Cylindrical spotlight made of aluminium; light inset lacquered; housing powder coated; light inset rotatable and tiltable; double lamps; surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; luminaire for through wiring

**FR** Spot cylindrique en aluminium ; insert d'éclairage peint ; boîtier thermolaqué ; module d'éclairage rotatif et orientable ; biflamme ; boîtier de montage en aluminium, avec convertisseur ; plaque de montage avec unité de conversion prémontée, pouvant être montée à l'avance ; corps de luminaire pouvant être monté sans outils grâce à un système de verrouillage ; caractéristiques de rayonn. précises grâce à l'optique à lentille ; Technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; luminaire pour câblage continu

### Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI  $\geq$  90 / 2 SDCM (initial MacAdam)  
 UGR  $\leq$  10, UGR  $\leq$  13, UGR  $\leq$  16, UGR  $\leq$  19  
 jusqu'à 93 lm/W  
 L80 / 50000 h  
 DALI-2, non DIM  
 IP20

### Types

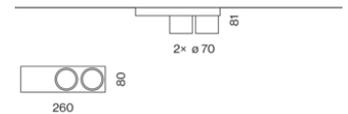

### Couleur



### Couleur intérieure



### Répartition de la lumière



glare control  
(UGR  $\leq$  16)



easy mounting  
no visible  
screws



CRI  $\geq$  95 2  
SDCM  
(optional)




## SASSO 60 base round adjustable 2 lamps ceiling



### SPOT 15°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE  |
|--------|--------------|-----------|----------|---|
| 20.8 W | 2700 K       | 1470 lm   | 71 lm/W  | 0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |
|        | 3000 K       | 1520 lm   | 73 lm/W  | 0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |
|        | 3500 K       | 1550 lm   | 75 lm/W  | 0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |
|        | 4000 K       | 1600 lm   | 77 lm/W  | 0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S |

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.



### MEDIUM 27°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE  |
|--------|--------------|-----------|----------|---|
| 20.5 W | 2700 K       | 1750 lm   | 85 lm/W  | 0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |
|        | 3000 K       | 1810 lm   | 88 lm/W  | 0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |
|        | 3500 K       | 1850 lm   | 90 lm/W  | 0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |
|        | 4000 K       | 1890 lm   | 92 lm/W  | 0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M |

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

### FLOOD 40°-41°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE  |
|--------|--------------|-----------|----------|---|
| 20.5 W | 2700 K       | 1660 lm   | 81 lm/W  | 0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |
|        | 3000 K       | 1720 lm   | 84 lm/W  | 0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |
|        | 3500 K       | 1760 lm   | 86 lm/W  | 0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |
|        | 4000 K       | 1800 lm   | 88 lm/W  | 0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F |

The data values for the luminous flux may differ for specific order options by -15%. Luminous flux value refers to inner colour traffic white.

### WIDE FLOOD 56°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE  |
|--------|--------------|-----------|----------|---|
| 20.5 W | 2700 K       | 1750 lm   | 85 lm/W  | 0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
|        | 3000 K       | 1820 lm   | 89 lm/W  | 0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
|        | 3500 K       | 1860 lm   | 91 lm/W  | 0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |
|        | 4000 K       | 1900 lm   | 93 lm/W  | 0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W |

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.

## Order options


| CONTROL |   | COLOUR                 |   | INNER COLOUR           |   |
|---------|---|------------------------|---|------------------------|---|
| non DIM | 1 | jet black RAL 9005     | 1 | jet black RAL 9005     | 1 |
| DALI-2  | 3 | traffic white RAL 9016 | 7 | matt silver            | 4 |
|         |   |                        |   | traffic white RAL 9016 | 7 |
|         |   |                        |   | gold dust RAL 260-M    | 9 |

# Einfamilienhaus EFF, Austria


Autriche

**Architecte**  
STUDIO WG3

**Photographe**  
Heldentheater

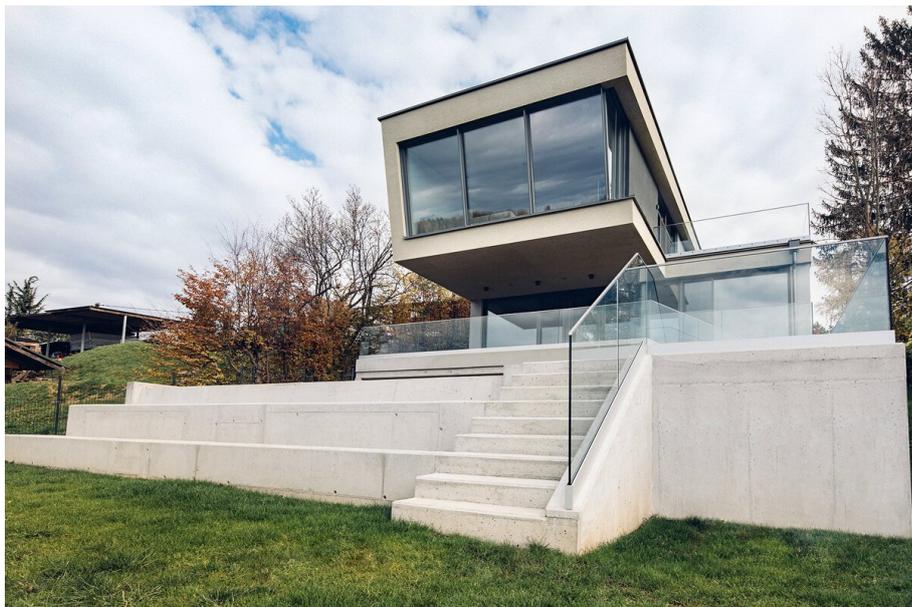

## Produits utilisés



**SASSO 60 base 2**  
lamps ceiling

