

STREAMCUT

surface

EN Floor or wall mounted light in aluminium with simple, minimalist design; luminaire head with integrated cooling fins; +/- 90° tiltable, lockable every 30°; anodised surface and dark grey powder coated; optional mounting screwed on or with ground spike (available as an accessory); partially printed safety glass, fixed with stainless steel screws; incl. high quality lens system symmetrical or asymmetrical light distribution; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve; ambient temperatures from -20°C to +50°C; separate luminaire wiring compartment, suitable for through wiring

FR Luminaire sol ou mural en aluminium dans un design sobre et épuré ; tête luminaire avec ailettes refroid. intégrées ; orientable à +/- 90° et fixable tous les 30° ; surface anodisée (protection) et gris foncé peint à la poudre ; Montage au choix vissé ou avec piquet de terre (disponible comme accessoire) ; verre de sécurité partiellement imprimé, fixé avec vis en inox ; incl. optique lentille grande qualité distribution symétrique ou asymétrique de la lumière ; LED économes en énergie à restitution de couleur élevée ; genre protection IP65, avec soupape compensation pression ; températures ambiantes de -20°C à +50°C ; logement séparé de branchement de luminaire, convient à un câblage passant

Quickinfo

3000 K
CRI ≥ 80, CRI ≥ 90 / 3 SDCM
(initial MacAdam)
UGR ≤ 19
jusqu'à 96 lm/W
L80 / 50000 h, L90 / 50000 h
non DIM
IP65, IK07

Types




Colours



Répartition de la lumière




**STREAMCUT** surface**ASYMMETRIC** grey aluminium, non DIM


SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
13.5 W	3000 K	80	1180 lm	87 lm/W	0 8 8 - 2 8 2 1 5 1 D A
34.0 W	3000 K	90	2710 lm	80 lm/W	0 8 8 - 2 8 5 1 5 1 D A

**FLOOD** grey aluminium, CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.5 W	3000 K	1300 lm	96 lm/W	0 8 8 - 2 8 2 1 5 1 D F

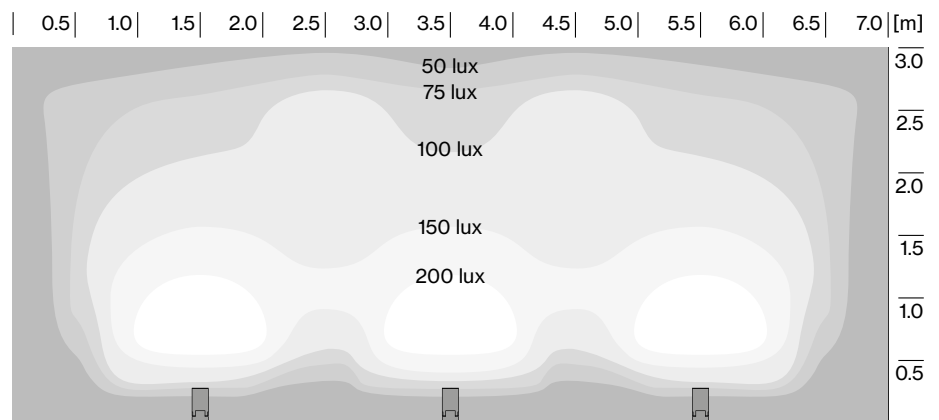
Planning Information**STREAMCUT** surface (14 W) with symmetric flood optics (3 luminaires)

zonal lighting: distance to wall: 1.5 m / distance between luminaires: 2.0 m, 30° tilt

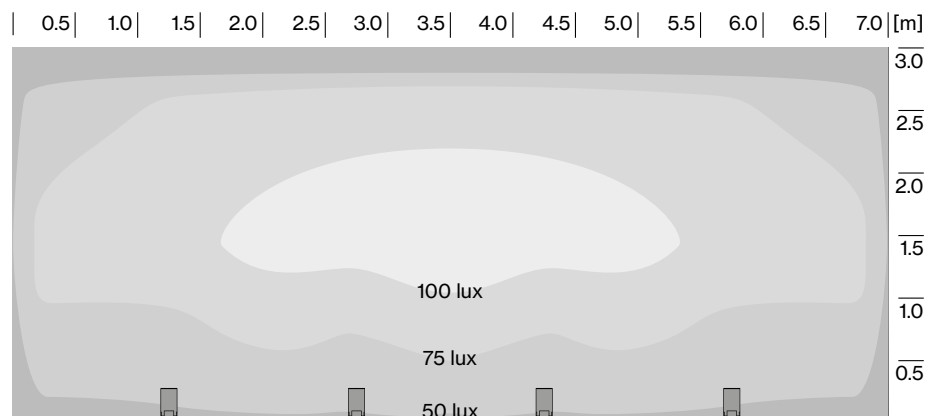**STREAMCUT** surface (14 W) with asymmetric optics (4 luminaires)

areal lighting: distance to wall: 1.5 m / distance between luminaires: 1.5 m, 30° tilt

Mounting accessories (optional)



EARTH SPIKE

L·W·H (mm)

130·62·323

ORDER CODE

0 8 8 - 2 8 9 2 1 1 0

Order options

COLOUR

grey aluminium

RAL 9007