

Quickinfo

3000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
jusqu'à 39 lm/W
L80 / 50000 h
non DIM
IP65, IK08

Types



Colours

Répartition de la lumière

STREAMCUT

wall

EN Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve; ambient temperatures from -20°C to + 50°C; separate luminaire wiring compartment, suitable for through wiring

FR Luminaire mural encastré en aluminium dans un design sobre et épuré ; surface anodisé (protection) et thermolaquée en gris foncé ou noir ; verre de sécurité partiellement imprimé, fixé avec vis en inox ; Réflecteur en aluminium pur mat anodisé avec caractéristique de rayonnement asymétrique ; LED économes en énergie à restitution de couleur élevée ; genre protection IP65, avec soupape compensation pression ; températures ambiantes de -20°C à +50°C ; logement séparé de branchement de luminaire, convient à un câblage passant




STREAMCUT wall


CRI ≥ 80 | 220-240 V | IP65 | IK 08 | X-PERT | X-PERT

ASYMMETRIC CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
7.6 W	3000 K	293 lm	39 lm/W	088-283151




Planning Information

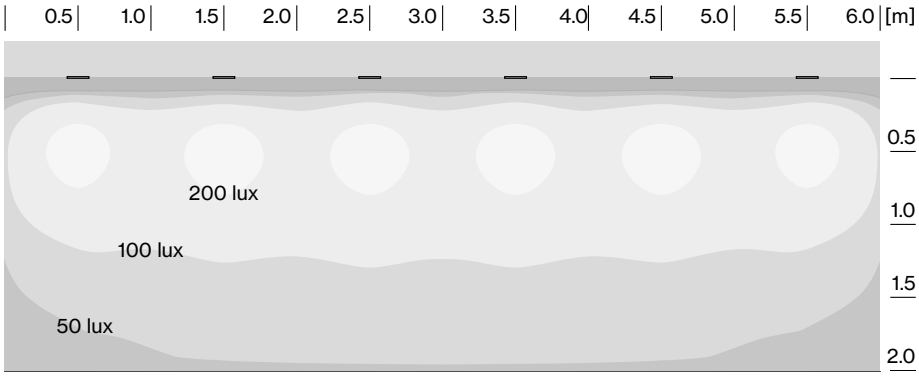

STREAMCUT wall (8.4 W, 6 luminaires)
wall mounting height from bottom: 0.8 m / distance between luminaires: 1.0 m

Mounting accessories



MOUNTING HOUSING for concrete and solid walls

L·W·H (mm)	ORDER CODE
290·100·200	088-289111 0

Order options

COLOUR	
jet black RAL 9005	8
grey aluminium RAL 9007	D